




**Product information**  
**8 ports, 1 signal/socket (3+PE), 5-15 M -**  
**ASNBL 8/LED5-4-320/15 M**  
**58460**


<b>Name</b>	
8 ports, 1 signal/socket (3+PE), 5-15 M	
	
Actuator/sensor distribution box, 8-port version, with LED operation and function indicators, housing and receptacle shells in stainless steel, with lateral ports, M12 socket, 4-pole, 1 signal per socket, fixed control cable - especially designed for use in food processing equipment, 15 meter.	
<b>Delivery informations</b>	
<b>Availability</b>	available
<b>Product description</b>	
<b>Type</b>	ASNBL 8/LED 5-4-320/15 M
<b>Order No.</b>	58460
<b>Description</b>	Actuator/sensor distribution box, 8-port version, with LED operation and function indicators, housing and receptacle shells in stainless steel, with lateral ports, M12 socket, 4-pole, 1 signal per socket, fixed control cable - especially designed for use in food processing equipment, 15 meter.
<b>Number of contacts</b>	4 (M12)
<b>Version</b>	8 ports
<b>Color of housing</b>	metallic
<b>Product characteristics</b>	Vibration resistance, Acids resistance, Drag chains suitable, EMC resistance
<b>Classification</b>	
<b>Belden brand</b>	Lumberg-Automation
<b>Mechanical data</b>	
<b>Thread</b>	M12
<b>LED display present</b>	✓
<b>Environmental conditions</b>	
<b>Environmental temperature</b>	-25 °C ... 70 °C
<b>Degree of protection (IP), mounted</b>	IP67 / IP69K
<b>Pollution degree</b>	3
<b>Materials</b>	
<b>Housing material / Molded body</b>	stainless steel
<b>Contact bearer material</b>	PVC
<b>Contact material</b>	CuZn
<b>Contact material - Surface refinement</b>	pre-nickel and 0.8 microns gold-plated
<b>Knurled screw / nut material</b>	stainless steel
<b>Sealing material</b>	EPDM
<b>Electrical data</b>	
<b>Contact resistance</b>	≤ 5 mΩ
<b>Rated current In</b>	4 A per socket / 12 A max. at 40°C
<b>Nominal voltage</b>	10 - 30 V DC
<b>Rated voltage</b>	32 V
<b>Insulation resistance</b>	> 1 GΩ
<b>Approvals</b>	
<b>Approvals</b>	UL
<b>Cable</b>	
<b>Cable length</b>	15 m
<b>Cable number</b>	320
<b>Cable description</b>	Cable for actuator/sensor distribution boxes
<b>Color of jacket</b>	black
<b>Material of outer jacket</b>	PVC

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Outer diameter of the cable	9.5 mm
Number of conductors	11
Cable design	8 x 0.34 mm <sup>2</sup> + 3 x 0.75 mm <sup>2</sup>
Flame resistant according to standard	IEC 60332-1-2, UL VW-1, CSA FT-1
Scope of delivery and accessories	
Scope of delivery	PZVK: 4 pvc dust covers for unused sockets

Picture  
Drawing

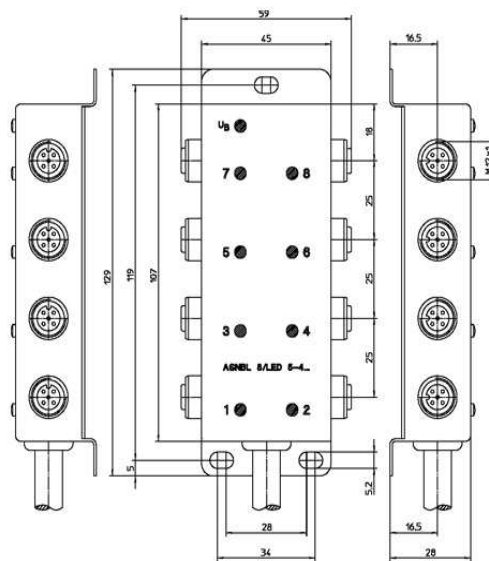

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.