


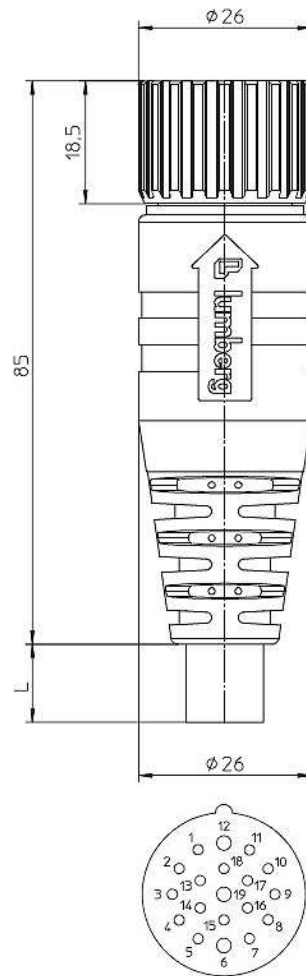


Product information
M23 Straight Female Connector,
RKUE - RKUE 19-242/5 M
60710

| | |
|---------------------------------------|---|
| | |
| Name | M23 Straight Female Connector, RKUE |
| |  |
| | Anschlussleitung, M23-Buchse mit Schraubverschluss, mit Erdung und angespritztem Kabel – für den Anschluss von steckbaren Aktor-/Sensor-Boxen -, 19-polig, PUR-Kabelmantel, halogenfrei, 5 Meter. |
| Delivery informations | |
| Availability | available |
| Product description | |
| Type | RKUE 19-242/5 M |
| Order No. | 60710 |
| Description | Anschlussleitung, M23-Buchse mit Schraubverschluss, mit Erdung und angespritztem Kabel – für den Anschluss von steckbaren Aktor-/Sensor-Boxen -, 19-polig, PUR-Kabelmantel, halogenfrei, 5 Meter. |
| Number of contacts | 19 |
| Color of housing | black |
| Product characteristics | Vibration resistance, Oil resistance, Resistance to torsions |
| Mechanical data | |
| Thread | M23 |
| Design of electrical connection | connector M23 |
| LED display present | ✗ |
| Environmental conditions | |
| Environmental temperature | -25 °C ... 80 °C |
| Degree of protection (IP), mounted | IP67 |
| Pollution degree | 3 |
| Materials | |
| Housing material / Molded body | TPU, self-extinguishing |
| Contact bearer material | PBT |
| Contact material | CuZn |
| Contact material - Surface refinement | pre-nickeled and gold-plated |
| Knurled screw / nut material | CuZn, nickel-plated |
| Electrical data | |
| Rated current In | 8 A |
| Nominal voltage | 120 V |
| Rated voltage | 125 V |
| Test voltage | 1.5 kV eff./60 s |
| Insulation resistance | > 10 GΩ |
| Approvals | |
| RoHS 2002/95/EG compliant | RoHS 2002/95/EG |
| Cable | |
| Cable length | 5 m |



Picture
Drawing



The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.