


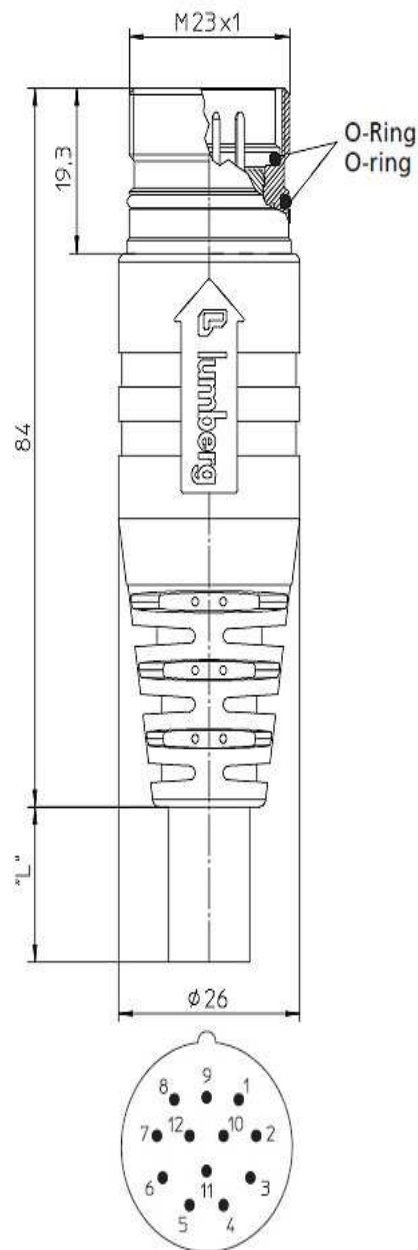


**Product information**  
**M23 Straight Male Connector,**  
**RSUF - RSUF 12-256/15 M**  
**62139**

Name		M23 Straight Male Connector, RSUF
		
		Anschlussleitung, M23-Stecker mit Schraubverschluss, Aussengewinde und angespritztem Kabel, 12-polig, PUR-Kabelmantel, halogenfrei, 15 Meter.
Delivery informations		
Availability		available
Product description		
Type		RSUF 12-256/15 M
Order No.		62139
Description		Anschlussleitung, M23-Stecker mit Schraubverschluss, Aussengewinde und angespritztem Kabel, 12-polig, PUR-Kabelmantel, halogenfrei, 15 Meter.
Number of contacts		12
Color of housing		black
Product characteristics		Vibration resistance, Oil resistance, Resistance to torsions
Mechanical data		
Type of plug-in contact		Male connector
Thread		M23
Design of electrical connection		connector M23
LED display present		✗
Environmental conditions		
Environmental temperature		-25 °C ... 80 °C
Degree of protection (IP), mounted		IP67
Pollution degree		3
Materials		
Housing material / Molded body		TPU, self-extinguishing
Contact bearer material		PBT
Contact material		CuZn
Contact material - Surface refinement		pre-nickeled and gold-plated
Knurled screw / nut material		CuZn, nickel-plated
Electrical data		
Rated current In		8 A
Nominal voltage		240 V
Rated voltage		250 V
Test voltage		2.5 kV eff./60 s
Insulation resistance		> 10 GΩ
Approvals		
RoHS 2002/95/EG compliant		RoHS 2002/95/EG
Cable		
Cable length		15 m



Picture  
Drawing



The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.