

Iumbergautomation A BELDEN BRAND


Product information M23 Angled Male Connector, RSWUF - RSWUF 12-256/20 M 63298

Name	M23 Angled Male Connector, RSWUF
Delivery informations	Anschlussleitung, M23-Stecker mit Schraubverschluss, Aussengewinde und angespritztem Kabel, 12-polig, PUR-Kabelmantel, halogenfrei, 20 Meter.
Delivery informations	available
Availability	available
Product description Type	RSWUF 12-256/20 M
Order No.	63298
Description	Anschlussleitung, M23-Stecker mit Schraubverschluss, Aussengewinde und angespritztem Kabel, 12-polig, PUR-Kabelmantel, halogenfrei, 20 Meter.
Number of contacts	
	black
Color of housing Product characteristics	Vibration resistance. Oil resistance. Resistance to torsions
Mechanical data	Vibration resistance, on resistance, hesistance to torsions
Thread	M23
Design of electrical connection	connector M23
Environmental conditions	CUINELIU M23
Environmental temperature	-25 °C 80 °C
Degree of protection (IP), mounted	1P67
Pollution degree	3
Materials	
Housing material / Molded body	TPU, self-extinguishing
Contact bearer material	PBT
Contact material	CuZn
Contact material - Surface refinement	pre-nickeled and gold-plated
Knurled screw / nut material	CuZn, nickel-plated
Electrical data	
Rated current In	88
Nominal voltage	240 V
Rated voltage	250 V
Test voltage	2.5 kV eff./60 s
Insulation resistance	> 10 GΩ
Approvals	
RoHS 2002/95/EG compliant	RoHS 2002/95/EG
Cable	
Cable length	20 m

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture Drawing

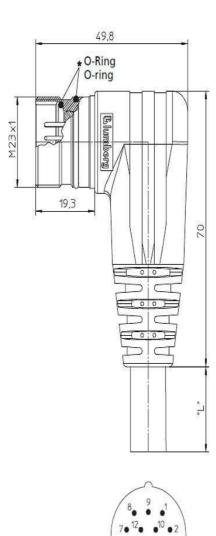

•3

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.