


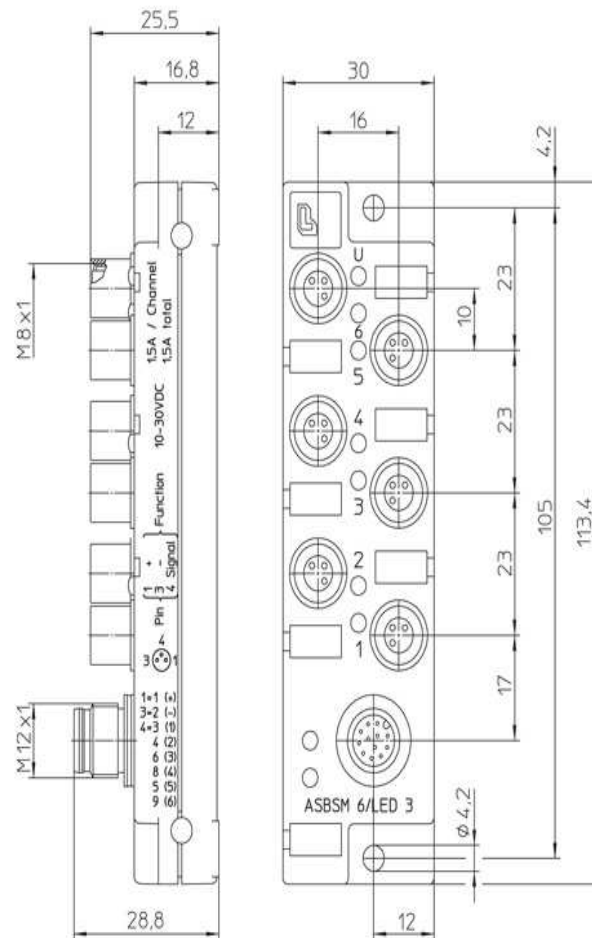


Product information
ASBSM 6/LED 3
65346

Name	
ASBSM 6/LED 3	
	
Pluggable miniature actuator/sensor distribution box, 6-port version, with LED operation and function indicators, M8 socket, 3-pole, 1 signal per socket, M12 connection for the control cable (type: RKT 12-348/...M).	
Delivery informations	
Availability	available
Product description	
Type	ASBSM 6/LED 3
Order No.	65346
Description	Pluggable miniature actuator/sensor distribution box, 6-port version, with LED operation and function indicators, M8 socket, 3-pole, 1 signal per socket, M12 connection for the control cable (type: RKT 12-348/...M).
Number of contacts	3 (M8)
Version	6 ports
Color of housing	black
Product characteristics	Vibration resistance, Oil resistance
Classification	
Belden brand	Lumberg-Automation
Mechanical data	
Thread	M8
LED display present	✓
Environmental conditions	
Environmental temperature	-25 °C ... 70 °C
Degree of protection (IP), mounted	IP67
Pollution degree	3
Materials	
Housing material / Molded body	PBT
Contact bearer material	PA, self-extinguishing
Contact material	CuZn (M8), Cu Zn (M12)
Contact material - Surface refinement	pre-nickel and 0.8 microns gold-plated
Knurled screw / nut material	CuZn, nickel-plated
Sealing material	FKM
Electrical data	
Contact resistance	≤ 5 mΩ
Rated current In	1.5 A per socket / 1.5 A max. at 40°C
Nominal voltage	10 - 30 V DC
Insulation resistance	> 1 GΩ
Scope of delivery and accessories	
Scope of delivery	ZVKM: 2 M8 dust covers for unused sockets ZBR 5/10: attachable labels, 10 pieces



Picture
Drawing



The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.