



## Product information 6 ports, 5-15 M - ASBM 6/LED 3-344/15 M 65354


Name	6 ports, 5-15 M
	The state of the s
	Miniature actuator/sensor distribution box, 6-port version, with integrated LED operation and function indicators, M8-sockets, 3-pole, fixed control cable, PU
	jacket, halogen free, black, 15 meter.
Delivery informations	jacket haloger nooy stately to motern
Availability	available
Product description	
Туре	ASBM 6/LED 3-344/15 M
Order No.	65354
Description	Miniature actuator/sensor distribution box, 6-port version, with integrated LED operation and function indicators, M8-sockets, 3-pole, fixed control cable, PL
	jacket, halogen free, black, 15 meter.
Number of contacts	3 (M8)
Version	6 ports
Color of housing	black
Product characteristics	Vibration resistance, Oil resistance, Drag chains suitable
Classification	Lumber Automatics
Belden brand Mechanical data	Lumberg-Automation
Thread	M8
LED display present	
	✓
Environmental conditions	05.00 70.00
Environmental temperature	-25 °C 70 °C
Degree of protection (IP), mounted	IP67     3
Pollution degree Materials	3
Housing material / Molded body	PBT
Contact bearer material	PA-GF, self-extinguishing
Contact material	CuSn
Contact material - Surface refinement	pre-nickeled and 0.8 microns gold-plated
Knurled screw / nut material	CuZn, nickel-plated
Sealing material	FKM
Electrical data	
Contact resistance	≤ 5 mΩ
Rated current In	1.5 A per socket / 1.5 A max. at 40°C
Nominal voltage	10 - 30 V DC
Insulation resistance	>1 GΩ
Approvals	
Approvals	cURus
Cable	
Cable length	15 m
Cable number	344
Cable description	Cable for actuator/sensor distribution boxes
Color of jacket	black
Material of outer jacket	PUR
Outer diameter of the cable	6.0 mm
Number of conductors	8

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect



Cable design	8 x 0.25 mm <sup>2</sup>
Conductor design	finest stranded, 32 x Ø 0.1 mm
Flame resistant according to standard	IEC 60332-2, CSA FT-2
Scope of delivery and accessories	
Scope of delivery	ZVKM: 2 M8 dust covers for unused sockets
	ZBR 5/10: attachable labels, 5 pieces
Picture	

Drawing

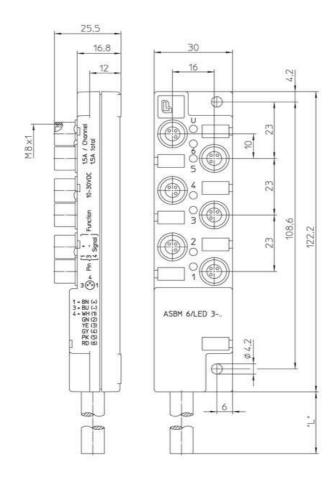

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.