



Product information 10 ports, 5-15 M - ASBM 10/LED 3-346/5 M 65358


Nama	10 parks F 4F M
Name	10 ports, 5-15 M
	♥
	Miniature actuator/sensor distribution box, 10-port version, with integrated LED operation and function indicators, M8-sockets, 3-pole, fixed control cable, PU
	jacket, halogen free, black, 5 meter.
Delivery informations	
Availability	available
Product description	LODIL LOS ED O CLOSE LA
Type	ASBM 10/LED 3-346/5 M
Order No.	65358 Misitary actuals (according to the control of the control o
Description	Miniature actuator/sensor distribution box, 10-port version, with integrated LED operation and function indicators, M8-sockets, 3-pole, fixed control cable, PU
Normhay of contrate	jacket, halogen free, black, 5 meter.
Number of contacts	3 (M8)
Version	10 ports
Color of housing	black
Product characteristics Classification	Vibration resistance, Oil resistance, Drag chains suitable
Belden brand	Lumberg-Automation
Mechanical data	Luilveig-valuinauvii
Thread	M8
LED display present	₩
Environmental conditions	05.00 20.00
Environmental temperature	-25 °C 70 °C
Degree of protection (IP), mounted	IP67
Pollution degree Materials	3
Housing material / Molded body	PBT
Contact bearer material	PA-GF, self-extinguishing
Contact material	CuSn
Contact material - Surface refinement	pre-nickeled and 0.8 microns gold-plated
Knurled screw / nut material	CuZn, nickel-plated
Sealing material	FKM
Electrical data	1.00
Contact resistance	$\leq 5 \text{ m}\Omega$
Rated current In	1.5 A per socket / 1.5 A max. at 40°C
Nominal voltage	10 - 30 V DC
Insulation resistance	>1 GΩ
Approvals	
Approvals	cURus
Cable	
Cable length	5 m
Cable number	346
Cable description	Cable for actuator/sensor distribution boxes
Color of jacket	black
Material of outer jacket	PUR
Outer diameter of the cable	6.4 mm

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect



Cable design	12 x 0.25 mm ²
Conductor design	finest stranded, 32 x Ø 0.1 mm
Flame resistant according to standard	IEC 60332-2, CSA FT-2
Scope of delivery and accessories	
Scope of delivery	ZVKM: 2 M8 dust covers for unused sockets
	ZBR 5/10: attachable labels, 5 pieces
Picture	

Drawing

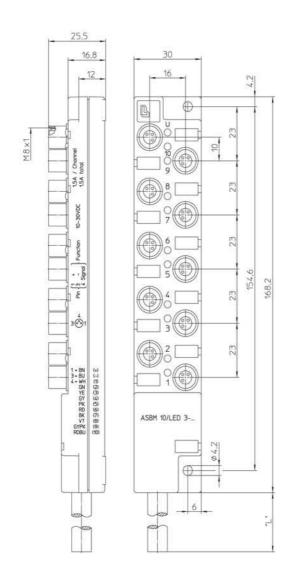

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.