



Product information 12 ports, 5-15 M - ASBM 12/LED 3-347/10 M 65362


Name	12 ports, 5-15 M
	Mising the background distribution by 10 and project with interested LFD and time indicator. Moreology, 0 and 6 fined and tall as he Distribution in the control of the con
	Miniature actuator/sensor distribution box, 12-port version, with integrated LED operation and function indicators, M8-sockets, 3-pole, fixed control cable, PU jacket, halogen free, black, 10 meter.
Delivery informations	Jacket, Halogett Hee, black, 10 Hieles.
Availability	available
Product description	tuido
Туре	ASBM 12/LED 3-347/10 M
Order No.	65362
Description	Miniature actuator/sensor distribution box, 12-port version, with integrated LED operation and function indicators, M8-sockets, 3-pole, fixed control cable, PU
posoribuon	jacket, halogen free, black, 10 meter.
Number of contacts	3 (M8)
Version	12 ports
Color of housing	black
Product characteristics	Vibration resistance, Oil resistance, Drag chains suitable
Classification	Visitation foliotatios, of foliotatios, stag vitatio delitable
Belden brand	Lumberg-Automation
Mechanical data	
Thread	M8
LED display present	*
Environmental conditions	05.00 70.00
Environmental temperature	-25 °C 70 °C
Degree of protection (IP), mounted	IP67
Pollution degree	3
Materials Housing material / Molded body	PBT
Contact bearer material	
	PA-GF, self-extinguishing
Contact material	CuSn
Contact material - Surface refinement	pre-nickeled and 0.8 microns gold-plated
Knurled screw / nut material	CuZn, nickel-plated
Sealing material Electrical data	FKM
Contact resistance	25 mQ
	$\leq 5 \mathrm{m}\Omega$
Rated current In	1.5 A per socket / 1.5 A max. at 40°C
Nominal voltage	10 - 30 V DC
Insulation resistance	>16Ω
Approvals	cURus
Approvals Cable	conus
Cable length	10 m
Cable number	347
Cable description	Cable for actuator/sensor distribution boxes
Color of jacket	black
Material of outer jacket	PUR
Outer diameter of the cable	7.2 mm

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Cable design	14 x 0.25 mm ²
Conductor design	finest stranded, 32 x Ø 0.1 mm
Flame resistant according to standard	IEC 60332-2, CSA FT-2
Scope of delivery and accessories	
Scope of delivery	ZVKM: 2 M8 dust covers for unused sockets
	ZBR 5/10: attachable labels, 5 pieces
Picture	

Drawing

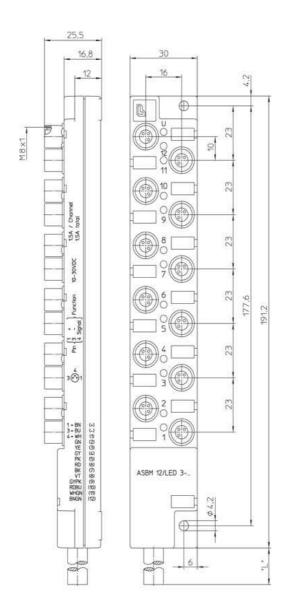

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.