





# 7000 Series Bulgin

## Metal Version

### CRIMP CONTACTS



10 & 32 pole contacts

- Crimp Contacts
- Gold Plated
- Current ratings:  
10 pole: 10A  
32 pole: 2A

### Contacts - Crimp for 10 and 32 pole

#### Contacts (for 10 pole) (Supplied in packs of 10)

	Crimp
Pins	SA3544/P
Sockets	SA3544/S

#### Contacts (for 32 pole) (Supplied in packs of 10)

	Crimp
Pins	SA3542/P
Sockets	SA3542/S

### CRIMP TOOLING



PNo 14025

- Crimp Tools for 10 and 32 pole crimp contacts

### Crimp Tooling

Crimp Tool (10 & 32 pole)	PNo. 14025
Positioner (10 pole)	PNo. 15021/SP
Positioner (32 pole)	PNo. 15019/SP

### EXTRACTION TOOLS



PNo 14944/SP PNo 14945/SP

- Extraction Tool for 10 and 32 pole contacts

### Extraction Tools

Extraction Tool (10 pole)	PNo. 14945/SP
Extraction Tool (32 pole)	PNo. 14944/SP

### CONTACT CARRIER REMOVAL TOOL



PNo. 15065/SP

- For removal of all contact carriers

### Tools

Contact carrier removal tool (all poles)	PNo. 15065/SP
--	---------------




**Metal Version**

**SEALING CAPS**



- Maintains IP rating of unmated connectors
- PXM7081: Fits PXM7010 (Flex Connector)
- PXM7082: Fits PXM7011 (Flex In-Line Connector) and PXP7012: (Panel Connector)
- PXM7083: Fits PXM7012 (Panel Mounting Connector)

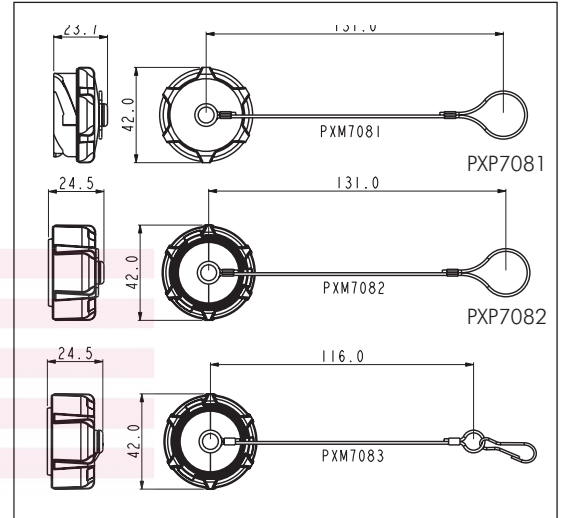

**CABLE GLAND PACKS**



- Packs of cable glands, cages and gland nuts to suit cables ranges from 5.0 to 15.0mm diameter
- PXM7088/0507: for cable ranges between 5.0 and 7.0mm
- PXM7088/0713: for cable ranges between 7.0 and 13.0mm
- PXM7088/1315: for cable ranges between 13.0 and 15.0mm

**CABLE BRAID TERMINATION OPTION**



- For cable braid termination
- Supplied with ty-rap



# 7000 Series Bulkhead

## Metal Version

### PART NO SYSTEM

**PXM / xxxx / xx x / xx / xxxx / xx**

Metal Connector Designation

Series

**7** = 7000 Series

Body Styles

**010** = Flex

**011** = Flex In-Line

**012** = Panel

No. of Contacts

**02** = 2 Pole

**03** = 3 Pole

**06** = 6 Pole

**10** = 10 Pole

**32** = 32 Pole

Contacts Type

**P** = Pin

**S** = Socket

Terminations

**ST** = Screw Terminal (2, 3, & 6 pole only)

**CR** = Crimp Contacts (10 & 32 pole only)

Cable Entry Size

(for Flex and Flex In-Line connectors only)

**0507** = 5-7mm (grey)

**0709** = 7-9mm (white)

**0911** = 9-11mm (black)

**1113** = 11 to 13 mm (yellow)

**1315** = 13 to 15 mm (light grey)

Cable Brand Termination Accessory

(for Flex and Flex In-Line connectors only)

**SN** - If requires

**Blank** - If not required

### Examples:

PXM7010/10/P/CR/0911/SN= Flex cable connector, 10 pole, pin contacts, crimp termination with 9 to 11mm cable glands and braid termination accessory

PXM7012/03/S/ST= Front panel mounting connector, 3 pole, socket with screw termination




## Metal Version


### SPECIFICATION

Electrical:		Mechanical:	
No. Poles:	2 3 6 10 32	Locking mechanism	Quarter turn, rapid locking
Current Rating:		Sealing:	IP66 to EN60529:1992 IP68 to EN60529:1992 (10m depth for 2 weeks) IP69k to DIN 40050-9
CCC, UL and VDE (pending)	25A 25A 10A 10A 3A	Contact Accommodation:	
cUL (pending)	25A 25A 8A 6A 2A	2 & 3 pole screw terminals	6.0mm <sup>2</sup> max
Voltage Rating (ac/dc):		6 pole screw	1.00mm <sup>2</sup> max
CCC, VDE (pending)	600V 600V 500V 277V 200V	10 pole crimp	18 to 20AWG
UL, cUL (pending)	600V 600V 600V 600V 600V	32 pole crimp	22 to 26AWG
Contact Resistance:	<10mΩ	Cable Acceptance:	5-15mm dia.
Insulation Resistance:	>10 <sup>9</sup> MΩ @500V dc	Cable retention force	
AC Breakdown voltage:		(to BS EN61984):	
2 pole	>10kV	5 - 9mm dia cable	80N
3 pole	>8kV	9 - 15mm dia cable	100N
6 to 32 pole	>5kV	Terminations:	
Operating Temp. Range:	-40°C to +120°C	2 Pole:	Screw Terminals
Approvals (pending):		3 Pole:	Screw Terminals
UL	UL1977	6 Pole:	Screw Terminals
CSA	C22.2 No.182.3-M1987 (R2009)	10 Pole:	Crimp Contacts
VDE	IEC 61984:2009	32 Pole:	Crimp Contacts
CCC	GB/T11918 and GB/T11919	Tightening Torques:	
<b>Material:</b>		Gland Nut:	TBA
Body:	Cast zinc alloy, nickel plated	Panel Nut:	1.7Nm (15lbf.in.)
Colour:	Matt silver	Panel Nut Thread:	M30 x 2-6g
Contacts:	Brass, Nickel plated (2A - Gold plated)	Dimensions:	
O Rings & Gaskets:	Silicon	Diameter: (over coupling ring)	42mm
RoHS	Compliant	Diameter: (panel hole cut-out)	30mm

Mated dimensions - Flex to panel connector

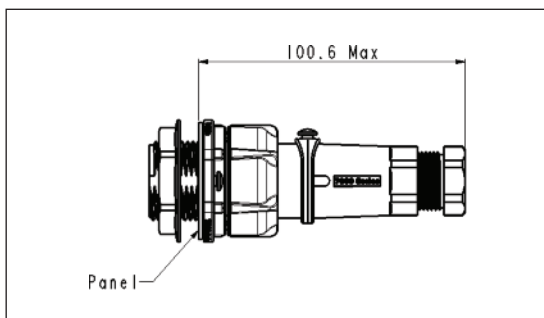

Mated dimensions - Flex connector to in-line connector

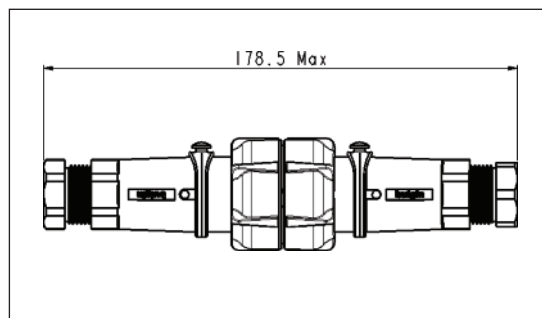



## CURRENT CARRYING CAPACITY

The thermal properties of the materials used in the construction of a connector limit the current carrying capacity. There are a number of factors that determine the amount of current that can be handled: contact spacing, size of cable, ambient temperature and the heat that is generated by the current passing through the connector.

The maximum current varies with different contact layouts, and because of these factors it is necessary to produce de-rating curves for each pole variant. This de-rating curve is specified in the standard IEC 60512 part 3.

De-rating curves are plotted for each contact carrier combination with the current being carried simultaneously by all contacts. These graphs show the heat rise generated as the current is increased.


The red line indicates the direct correlation between current applied and the measured temperature rise within the connector. The dotted blue line shows rated current and the green line is derived by applying a factor of 0.8 to the original plot data to give a de-rating curve. The dashed blue line shows the rated current.

The shaded area under the 0.8 curve shows the permitted operating area, and allows safe current vs ambient temperature characteristics to be determined.


- = tested operating limits
- = de-rated operating limits
- - - = rated current

### 7000 Series Current vs. Temperature Characteristics


**2 Pole, Screw Terminal, 6.0mm<sup>2</sup> wire**  
current applied through all pins simultaneously

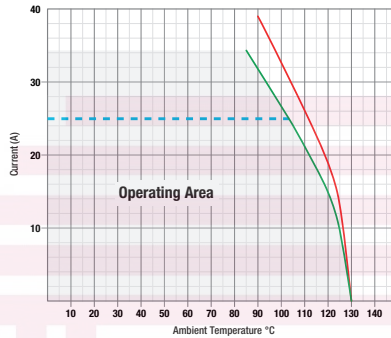


**3 Pole, Screw Terminal, 4.0mm<sup>2</sup> wire**  
current applied through all pins simultaneously

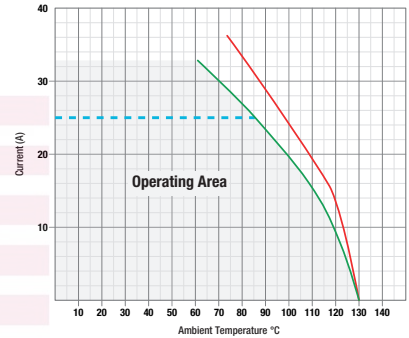

**6 Pole, Screw Terminal, 1.0mm<sup>2</sup> wire**  
current applied through all pins simultaneously

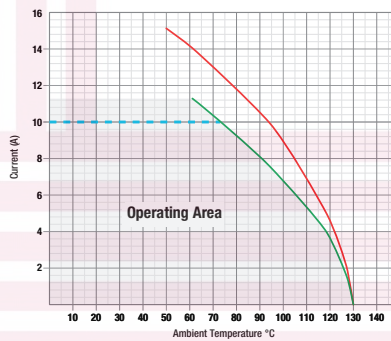

**10 Pole, Crimp Terminal, 18 AWG wire**  
current applied through all pins simultaneously

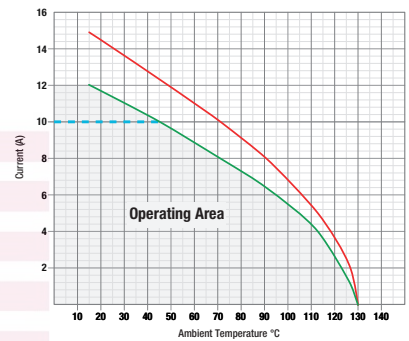

**32 Pole, Crimp Terminal, 22 AWG wire**  
current applied through all pins simultaneously

