



## Product information STASAP 2 B grau/grey 930 822-106


Name	STASAP 2 B grau/grey
Delivery informations	Surface mounted connector with cast baseplate, additional sealing for IP 54 necessary
Delivery informations	waitable
Availability  Product description	available
Product description  Description	Surface mounted connector with cast baseplate, additional sealing for IP 54 necessary
Туре	STASAP 2 B grau/grey
Order No.	930 822-106
Type of contact	male
Number of contacts	2 + PE
Conductor size	max. 1.5 mm <sup>2</sup>
Housing Color	grey
Contact bearer color Technical data	black
Pin dimensions	2 mm
Rated voltage	AC/DC 250 V
Rated current	DC 10 A / AC 16 A
Contact resistance	<= 5 m0hm
Type of termination	screws
Mounting	Schrauben
Material	G. Madesur.
Contact material	Cu Zn
Contact surface material	Sn
Contact bearer material	PA PA
Housing material	PA PA
<b>Environmental conditions</b>	
Protection class (IEC 60529)	IP 54
Pollution severity	3
Temperature range	-30 °C to +90 °C
Inflammability class	
Housing	UL 94 HB
Contact bearer	UL 94 V-0
Approvals	
UL	UL
VDE	VDE
SEV	SEV
Packing unit	
Packaging unit	100 pieces
Scope of delivery and accessories	(1) 1 2 071010
Accessories to order separately	safety brackets STASI 2, order no. 732 044-000

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture

Drawing

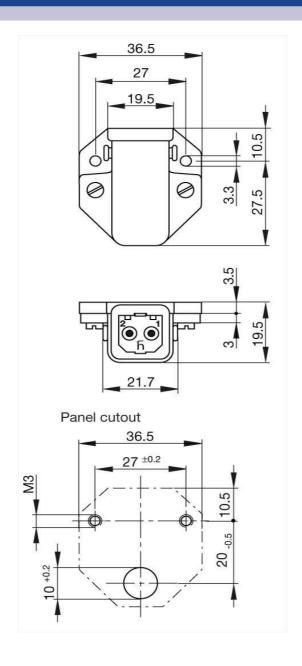

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.