



Product information STASAP 5 grau/grey 932 512-106


Name	STASAP 5 grau/grey
	Surface mounted connector, not assembled with added contacts
Delivery informations	Surface mounted connector, not assembled with added contacts
Availability	available
Product description	et aliable
Description	Surface mounted connector,
• •	not assembled with added contacts
Туре	STASAP 5 grau/grey
Order No.	932 512-106
Type of contact	male
Number of contacts	5+PE
Conductor size	max. 1 mm ²
Housing Color	grey
Contact bearer color	black
Technical data	William
Pin dimensions	1.6 mm
Rated voltage	AC 400 V / DC 250 V
Rated current	DC 10 A / AC 6 A
Contact resistance	<= 10 m0hm
Type of termination	screws
Mounting	Schrauben
Material	
Contact material	Cu Zn
Contact surface material	Ag
Contact bearer material	PA PA
Housing material	PA
Environmental conditions	
Protection class (IEC 60529)	IP 54
Pollution severity	3
Temperature range	-30 °C to +90 °C
Inflammability class	
Housing	UL 94 HB
Contact bearer	UL 94 V-0
Approvals	UDE
VDE	VDE
SEV	SEV
Packing unit	100 piegos
Packaging unit Scope of delivery and accessories	100 pieces
Accessories to order separately	safety brackets STASI 3,
	order no. 732 045-001
	1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture

Drawing

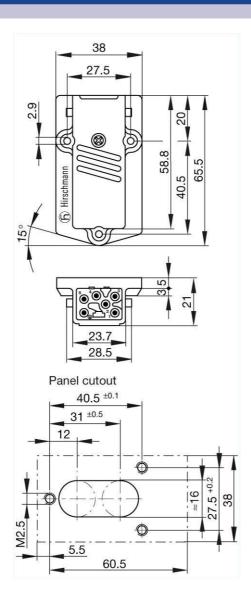

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.