



## Product information N6R EF S 933 711-001


Name	NGR EF S
	Straight cable socket, shielded,
Delivery informations	
Availability	available
Product description	
Description	Straight cable socket, shielded,
Туре	N6R EF S
Order No.	933 711-001
Type of contact	female
Number of contacts	6 + PE
Cable gland	PG 13.5
Conductor size	max. 1.5 mm <sup>2</sup>
Standard	DIN 43651
Housing Color	metallic
Technical data	
Pin dimensions	1.6 mm
Rated voltage	AC 25 V / DC 50 V
Rated current	10 A
Contact resistance	<= 5 m0hm
Type of termination	crimp
Suitable cables	0.5 mm <sup>2</sup> to 1.5 mm <sup>2</sup>
Material	John Charles
Contact surface material	Ag
Contact bearer material	PET
Environmental conditions	(17)
Protection class (IEC 60529)	IP 65
Temperature range	-40 °C to +90 °C
Packing unit	
Packaging unit	10 pieces
Scope of delivery and accessories	
Scope of delivery	1 cable sockets, not assembled, in polythene bag, with assembly instructions
Accessories to order separately	can be plugged into NGR BM FA S;
	EMV-PG-cable gland N6R-41
	order no. 734 605-001
	EMV-PG-cable gland N6R-42
	order no. 734 606-001
	coding NC 6,
	order no. 831 002-011
	contacts: RBC 162

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture

Drawing

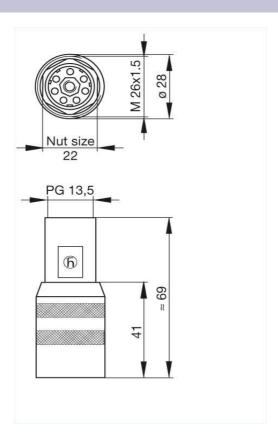

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.