



Product information


CA 3 LD

934 125-100

Name		CA 3 LD
		
		Straight cable socket, integrated strain relief
Delivery informations		
Availability		available
Product description		
Description		Straight cable socket, integrated strain relief
Type		CA 3 LD
Order No.		934 125-100
Number of contacts		3 + PE
Cable gland		M 22x2
Cable diameter		6 mm to 12 mm
Conductor size		max. 2.5 mm ²
Housing Color		black
Technical data		
Pin dimensions		2 mm
Rated voltage		AC 400 V / DC 250 V
Rated current		DC 10 A / AC 16 A
Contact resistance		<= 3 mOhm
Type of termination		screw
Material		
Contact surface material		Ag
Contact bearer material		PA 66-GF 25
Housing material		PA 66-GF 25
O-Ring		NBR
Environmental conditions		
Protection class (IEC 60529)		IP 67
Pollution severity		3
Temperature range		-40 °C to +90 °C
Inflammability class		
Flammability, UL standard		94 V-0
Approvals		
UL		UL
VDE		VDE
Packing unit		
Packaging unit		100 pieces
Scope of delivery and accessories		
Scope of delivery		1 cable socket, not assembled, assembly instructions
Accessories to order separately		can be plugged into CA 3 LS, CA 3 GS; cap CA 00 SD 3, order no. 831 532-400



Picture
Drawing

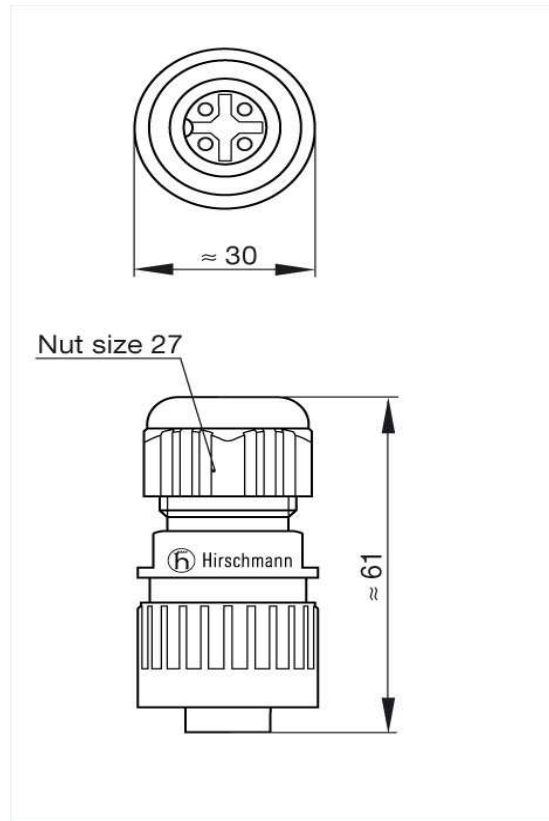

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.