



Product information RSW - RSW 50-04/2 M 98580


| | DOW |
|--------------------------------------|--|
| lame | RSW |
| | Activities (now and set 7/0) and a connection with self-lasting threaded initiated and half of 0/0 and a connection of the self-lasting threaded initiated and self-lasting threaded in the se |
| taliyanı informationa | Actuator/sensor cordset, 7/8" male connector, right angle version, with self-locking threaded joint and molded cable, PVC cable, orange, 5 poles, 2 meters |
| delivery informations | available |
| vailability | avaliane |
| Product description | DOMEO OA/O M |
| ype | RSW 50-04/2 M |
| order No. | 98580 |
| Description | Actuator/sensor cordset, 7/8" male connector, right angle version, with self-locking threaded joint and molded cable, PVC cable, orange, 5 poles, 2 meters |
| lumber of contacts | 5 |
| olor of housing | orange |
| roduct characteristics | Vibration resistance, Oil resistance |
| Mechanical data | les de la companya de |
| ype of plug-in contact | Male connector |
| lesign of housing | angled |
| hread | 7/8" |
| esign of electrical connection | connector 7/8 inch |
| ED display present | × |
| nvironmental conditions | |
| nvironmental temperature | -40 °C 90 °C |
| legree of protection (IP), mounted | IP68 |
| ollution degree | 3 |
| Naterials | |
| lousing material / Molded body | TPU, self-extinguishing |
| ontact bearer material | TPU, self-extinguishing |
| ontact material | CuZn |
| ontact material - Surface refinement | silver-plated and 0.3 microns gold-plated |
| nurled screw / nut material | PA PA |
| lectrical data | |
| Contact resistance | $\leq 5 \text{ m}\Omega$ |
| ated current In | 9 A at 40°C, UL and notice derating |
| lominal voltage | 240 V |
| ated voltage | 250 V |
| est voltage | 1.5 kV eff./60 s |
| nsulation resistance | >1 6Ω |
| pprovals | |
| oHS 2002/95/EG compliant | RoHS 2002/95/EG |
| able | |
| able length | 2 m |
| able description | Cable for sensors and actuators |
| olor of jacket | orange |
| Naterial of outer jacket | PVC |
| Outer diameter of the cable | 6.80 mm |
| lominal diameter of the cable | 5 x 0.50 mm ² |
| | |

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect



Picture

Drawing

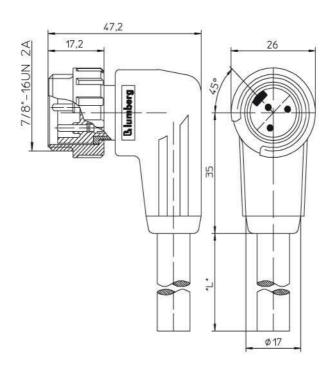

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.