



Product information RSW - RSW 20-03/5 M 98583

Name	RSW
	Actuates (consequently 270" male consector right and a version, with self-looking threaded inits and molded coble. DVC coble, consequently and a consector right and a version with self-looking threaded inits and molded coble.
Delivery informations	Actuator/sensor cordset, 7/8" male connector, right angle version, with self-locking threaded joint and molded cable, PVC cable, orange, 2 poles, 5 meters
Availability	available
Product description	u-unance
Туре	RSW 20-03/5 M
Order No.	98583
Description	Actuator/sensor cordset, 7/8" male connector, right angle version, with self-locking threaded joint and molded cable, PVC cable, orange, 2 poles, 5 meters
·	Actuator/sensor cordset, 778 male connector, right angle version, with sen-locking direaded joint and moided cable, PVC cable, orange, 2 poles, 5 meters  2
Number of contacts	
Color of housing Product characteristics	orange
	Vibration resistance, Oil resistance
Mechanical data	Mela annualty
Type of plug-in contact	Male connector
Design of housing	angled
Thread	7/8"
Design of electrical connection	connector 7/8 inch
LED display present	×
Environmental conditions	1000 0000
Environmental temperature	-40 °C 90 °C
Degree of protection (IP), mounted	IP68
Pollution degree	3
Materials	TDU celé autinouishina
Housing material / Molded body	TPU, self-extinguishing
Contact bearer material	TPU, self-extinguishing
Contact material	CuZn
Contact material - Surface refinement	silver-plated and 0.3 microns gold-plated
Knurled screw / nut material	PA
Electrical data	
Contact resistance	≤5 mΩ
Rated current In	12 A at 40°C, UL and notice derating
Nominal voltage	240 V
Rated voltage	250 V
Test voltage	2 kV eff./60 s
Insulation resistance	>1 GΩ
Approvals	D-110 0000/05/FC
RoHS 2002/95/EG compliant	RoHS 2002/95/EG
Cable Cable Inneth	5 m
Cable length	5 m
Cable number	03
Cable description	Cable for sensors and actuators
Color of jacket	orange
Material of outer jacket	PVC
Outer diameter of the cable	6.80 mm
Nominal diameter of the cable	2 x 0.75 mm <sup>2</sup>
Construction of conductor	22 x 0.2 mm

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respec




Flame resistant according to standard

none

Picture

Drawing

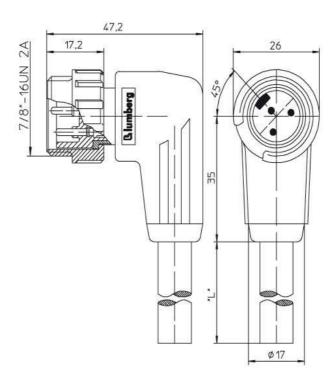

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.

Electroustic Ltd www.electroustic.co.uk +44 (0)1908 307200