

KEL-BES-S


Split brush plate for cable pass-through



Screw mounting or mounting via expanding rivets possible.



Round version with M50 thread for locknut or snap-in mounting.

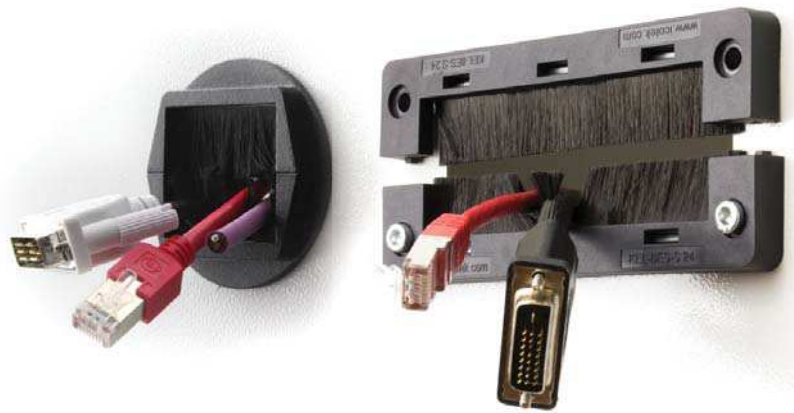

Description	Type	Order No.	Cut-out	PU
	<p>KEL-BES-S 24</p> <p>NEW KEL-BES-S 24 with expanding rivets</p>	<p>51522</p> <p>51522.002</p>	<p>36 x 112 mm</p> <p>36 x 112 mm</p>	<p>10</p> <p>10</p>
	<p>KEL-BES-S 16</p> <p>NEW KEL-BES-S 16 with expanding rivets</p>	<p>51521</p> <p>51521.002</p>	<p>36 x 86 mm</p> <p>36 x 86 mm</p>	<p>10</p> <p>10</p>
	<p>KEL-BES-S 10</p> <p>NEW KEL-BES-S 10 with expanding rivets</p>	<p>51520</p> <p>51520.002</p>	<p>36 x 65 mm</p> <p>36 x 65 mm</p>	<p>10</p> <p>10</p>
	<p>Expanding rivets</p>	<p>99153</p>	<p>For wall thickness 1-4 mm</p>	<p>100</p>
	<p>KEL-BES-S 50</p>	<p>51540</p>	<p>M50 x 1.5 Snap-in function for wall thickness 1 - 2.5 mm</p>	<p>10</p>
	<p>KEL-BES-S 32</p>	<p>51538</p>	<p>M32 x 1.5 Snap-in function for wall thickness 1 - 2.5 mm</p>	<p>10</p>

Product description

Split brush plates KEL-BES-S for routing cables into server racks, control panels and electrical enclosures. The brush plates can either be mounted via screws or via expanding rivets. Due to the split frame the KEL-BES-S can also be subsequently installed around the routed cables. The KEL-BES-S frames match exactly the cut-out dimensions for 10-, 16- or 24-pin standard industrial connectors.

For round metric cut-outs M32/M50 icotek offers the split KEL-BES-S 32/50. It can be either directly snapped into the cut-out or screwed with a locknut.

Advantages & benefits

- Fast and easy assembly (optional without screws)
- Subsequent assembly possible
- Versatile utilisation
- Allows reduced airflow while filtering out dust, hair and larger particulate matter
- Visual screening
- Protects cables against wear due to sharp edges of the cut-out

Specifications

Material	<p>Frame, rectangular: Polyamide (PA)</p> <p>Frame, round: Polycarbonate (PC) (Flame class UL94-Vo)</p> <p>Brushes: Polyamide (PA)</p> <p>Brush profile: sheet steel, zinc plated</p>
Temperature Properties	<p>- 20°C to + 90°C</p> <p>Halogen-free, silicone-free</p>
Frame depth	<p>10 mm</p>

Accessories

KEL-EMC-PF Cable collectors 139