


KT

Grommets, small, single



1.1

IP54 IP66 IP68



Product description

Cable grommets KT small are used with the cable entry frames & cable glands of product groups 1.11 & 1.12.

The model range KT small is designed for cable diameters from 1 to 17 mm.

Assembly note

When installing the grommets, the flat side should be facing the middle of the frame. This allows the flat sides of adjacent grommets to match up and provide a secure seal.

Pressure compensation element PCE 12

Pressure compensation element PCE 12 to avoid water condensation in highly sealed enclosures. For use in cable grommets KT 12 in combination with cable entry frames KEL-ER or cable glands KVT-ER.



Description	Type	Order No grey	Order No black	Clamping range	PU
	BTK	41251	41351	Blank grommet	10
BTK	KT 1	39941	39943	1 - 2 mm	10
	KT 2	39934	41302	2 - 3 mm	10
	KT 3	41203	41303	3 - 4 mm	10
	KT 4	41204	41304	4 - 5 mm	10
	KT 5	41205	41305	5 - 6 mm	10
KT round	KT 6	41206	41306	6 - 7 mm	10
	KT 7	41207	41307	7 - 8 mm	10
	KT 8	41208	41308	8 - 9 mm	10
	KT 9	41209	41309	9 - 10 mm	10
	KT 10	41210	41310	10 - 11 mm	10
	KT 11	41211	41311	11 - 12 mm	10
	KT 12	41212	41312	12 - 13 mm	10
	KT 13	41213	41313	13 - 14 mm	10
	KT 14	41214	41314	14 - 15 mm	10
	KT 15	41215	41315	15 - 16 mm	10
	KTs 16	39901	39912	16 mm	10
	KTs 17	39900	39913	17 mm	10
Pressure compensation element PCE 12					
	PCE 12 with KT 12	99192	99194	-	5
	PCE 12	99190		-	5

*Only valid for grey product types



IP54

UL TYPE 12

HL3 EN 45545-2

E45 E130 EN 45545-3 Page 197

UV ISO 4892-2A


ECOLAB certified

RoHS compliant

Made in Germany



KT Grommets, small, multi & special grommets

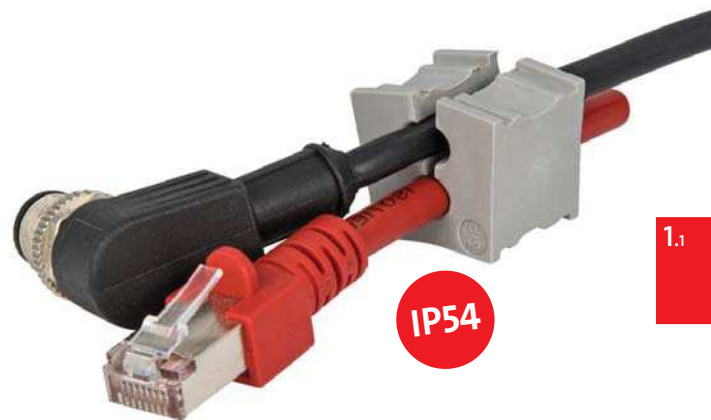

IP54

1.1

Description	Type	Order No grey	Order No black	Clamping range	PU
KT 2 x	KT 2 1	39942	39944	2x ø 1 mm	10
	KT 2 2	39935	39936	2x ø 2 mm	10
	KT 2 3	39939	39940	2x ø 3 mm	10
	KT 2 4	39906	39907	2x ø 4 mm	10
KT 4 x	KT 2 5	41200	39904	2x ø 5 mm	10
	KT 2 6	41201	39905	2x ø 6 mm	10
	KT 2 7	41202	39916	2x ø 7 mm	10
	KT 2 8	39917	39918	2x ø 8 mm	10
KT ASI2 r	KT 4 2	39937	39938	4x ø 2 mm	10
	KT 4 3	39914	39915	4x ø 3 mm	10
	KT 4 4	39909	39911	4x ø 4 mm	10
KT ASI2 l	KT 4 5	39908	39910	4x ø 5 mm	10
	KT 4 6	39932	39933	4x ø 6 mm	10
KT oval	KT-ASI	39902	39903	1 ASI-cable	10
	KT-ASI2 r	39922	39924	2 ASI-cables	10
	KT-ASI2 l	39921	39923	2 ASI-cables	10
KT S1	KT oval	39930	-	approx. 8 x 4 mm	10
	KT tele	39931	-		10
KT tele1	KT tele	39929	-	Telephone cable	10
	KT tele1	41257	-	Data cable RJ12	10
KT tele2	KT tele2	41258	-	Data cable RJ10 / RJ45	10

*Only valid for grey product types

Specifications KT grey

Material: Elastomer
 Flame class: UL94-Vo, self-extinguishing
 IP rating: KT round, single: up to IP66/IP68
 KT round, multi: IP54
 KT special, multi: IP54
 UL type rating: up to UL type 4X (acc. to UL 50E)
 Temperature: - 40°C to + 90°C (static)
 Properties: Halogen-free, silicone-free

Specifications KT black

Material: Elastomer
 Flame class: UL94-HB
 IP rating: KT round, single: up to IP66/IP68
 KT round, multi: IP54
 KT special, multi: IP54
 Temperature: - 30°C to + 90°C (static)
 Properties: Higher chemical resistance

Specifications PCE 12

Material: Polyamide 6
 Membrane: Polyacrylate
 IP rating: IP65
 Temperature: - 30°C to + 90°C (static)
 Air flow: ΔP = 70 mbar, min. 50 l/h

Accessories

ST Plugs 53