

UNITRONIC® BUS ASI FD

Highly flexible application

Communication at sensor/actuator level. Halogen free (PUR), UL-approval, oil resistant (TPE). Temperature range from -40 °C bis +105 °C (TPE)


Info

"FD" = suitable for power chains

"LD" = Long Distance

LAPP KABEL STUTTGART UNITRONIC® BUS ASI FD

LAPP KABEL STUTTGART UNITRONIC® BUS ASI FD

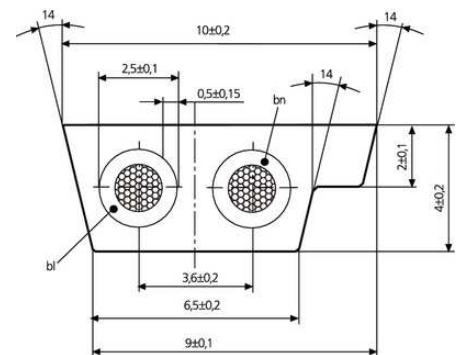

Temperature-resistant



Power chain



Halogen-free



Mechanical and plant engineering



Automation & fältinstallation

Benefits

The new BUS ASI LD 2 x 2.5 (Long Distance) allows even modules located further away to be connected.

AS-I power supplies can be reduced. The BUS ASI LD is downwards-compatible with version 1.5.

For highly flexible applications (power chains, moving machine parts)

High oil-resistance

Last Update (24.04.2018)

©2018 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

UNITRONIC® BUS ASI FD

Application range

Communication at sensor/actuator level
Sensor-/actuator wiring

Product features

PUR versions are halogen-free according to IEC 60754-1
Flame-retardant according to IEC 60332-1-2, UL FT-2 flame test
Data and power are transmitted via an unscreened, geometrically coded two-core flat cable (protection against polarity reversal).
The conductor is contacted by "piercing technology" within the ASI modules.
The sensors are connected to the ASI modules (coupling modules) using round cables (connection cables).

Norm references / Approvals

ASI is standardised Europe-wide in EN 50295 and internationally in IEC 62026-2.
TPE variant: UL AWM Style 2103
CSA AWM II A/B
PUR versions: UL AWM Style 20549

Product Make-up

Extra-fine wire, tinned copper strands
Core insulation: blue and brown
Outer sheath:
TPE
PUR
Outer sheath: yellow (RAL 1023), black (RAL 9005), red (RAL 3000)

Technical Data

Classification:	ETIM 5.0 Class-ID: EC000830 ETIM 5.0 Class-Description: Data cable
Peak operating voltage:	300 V (not for power applications)
Conductor resistance:	1.5 mm ² : max. 13.7 Ohm/km 2.5 mm ² : max. 8.21 Ohm/km
Minimum bending radius:	Fixed installation: 12 mm Flexing without fixing: 24 mm Flexing with fixing: 60 mm (15 x D)
Test voltage:	Core/core: 2000 V
Temperature range:	Fixed installation: -40 °C to +80 °C (TPE +105 °C) Flexing – without fixing: -30 °C to +70 °C (TPE +105 °C)

UNITRONIC® BUS ASI FD

Note

Unless specified otherwise, the shown product values are nominal values. Detailed values (e.g. tolerances) are available upon request.

Copper price basis: EUR 150/100 kg. Refer to catalogue appendix T17 for the definition and calculation of copper-related surcharges.

Please find our standard lengths at: www.lappkabel.de/en/cable-standardlengths

Lapp Kabel is a member of the AS-International Association

Photographs are not to scale and do not represent detailed images of the respective products.

Prices are net prices without VAT and surcharges. Sale to business customers only.

UNITRONIC® BUS ASI FD

Article number	Article designation	Outer sheath material	Outer sheath colour	Application	Number of cores and mm² per conductor	Copper index (kg/km)	Weight (kg/km)
For highly flexible applications (power chains, moving machine parts)							
2170357	UNITRONIC® BUS ASI FD P FRNC	PUR UL/CSA (AWM)	yellow	Data and power transmission	2 x 1.5	29	64
2170358	UNITRONIC® BUS ASI FD P FRNC	PUR UL/CSA (AWM)	black	Transmission of 30 V DC auxiliary power	2 x 1.5	29	64
2170317	UNITRONIC® BUS ASI LD FD P	PUR UL/CSA (AWM)	yellow	Data and power transmission	2 x 2.5	48	74
2170318	UNITRONIC® BUS ASI LD FD P	PUR UL/CSA (AWM)	black	Transmission of 30 V DC auxiliary power	2 x 2.5	48	74
2170830	UNITRONIC® BUS ASI FD (TPE) A	TPE UL/CSA (AWM)	yellow	Data and power transmission	2 x 1.5	29	64
2170831	UNITRONIC® BUS ASI FD (TPE) A	TPE UL/CSA (AWM)	black	Transmission of 30 V DC auxiliary power	2 x 1.5	29	64

Last Update (24.04.2018)
 ©2018 Lapp Group - Technical changes reserved
 Product Management www.lappkabel.de
 You can find the current technical data in the corresponding data sheet.
 PN 0456 / 02_03.16