

QUINT4-UPS/1AC/1AC/500VA/USB - Uninterruptible power supply



1067327

<https://www.phoenixcontact.com/gb/products/1067327>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



QUINT AC-USV, IQ Technology, DIN rail mounting, input: 120 V AC / 230 V AC, output: 120 V AC / 230 V AC / 500 VA. output: 120 V AC / 500 VA. output: 230 V AC / 500 VA.

Commercial data

Item number	1067327
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CMUI15
Product key	CMUI15
GTIN	4055626736082
Weight per piece (including packing)	3,062 g
Weight per piece (excluding packing)	2,724 g
Customs tariff number	85371091
Country of origin	DE

QUINT4-UPS/1AC/1AC/500VA/USB - Uninterruptible power supply



1067327

<https://www.phoenixcontact.com/gb/products/1067327>

Technical data

Input data

Input voltage	120 V AC
	230 V AC
Input voltage range	90 V AC ... 264 V AC
Nominal input voltage range	100 V AC ... 240 V AC
Typical national grid voltage	120 V AC
Voltage type of supply voltage	AC
Frequency range (f_N)	45 Hz ... 65 Hz
Permissible backup fuse	max. 25 A
Current consumption	6.9 A (100 V AC)
	2.86 A (240 V AC)
	19 A (24 V DC)

Output data

Efficiency	> 97 % (100 % load, with charged energy storage)
	~ 87 % (100 % load)
Apparent power	500 VA
Real power	400 W
Power factor (cos phi)	0.8
Crest factor	2.8
Switch-over time	< 10 ms
UPS classification	VFD-SS-311
Connection in parallel	no
Connection in series	No
Overload capability Mains operation	in accordance with internal fuse
Overload capability Battery operation	105 % (Permanent)
	120 % ... 150 % (20 s / 5 s, then shutdown)

Mains operation

Output voltage	120 V AC
	230 V AC
Nominal output current (I_N)	4.17 A (120 V AC)
	2.17 A (230 V AC)
Maximum no-load power dissipation	typ. 9 W (120 V AC)
	typ. 10 W (230 V AC)
Power loss nominal load max.	typ. 10 W (120 V AC)
	typ. 11 W (230 V AC)
Nominal output frequency	60 Hz \pm 5 Hz
	50 Hz \pm 5 Hz
Output fuse	10 A 400 V gRL

QUINT4-UPS/1AC/1AC/500VA/USB - Uninterruptible power supply



1067327

<https://www.phoenixcontact.com/gb/products/1067327>

Battery operation

Output voltage	120 V AC ± 2 %
	230 V AC ± 2 %
Form of output voltage	Pure sine
Maximum no-load power dissipation	approx. 23 W (120 V AC)
	approx. 24 W (230 V AC)
Power loss nominal load max.	approx. 57 W (120 V AC)
	approx. 54 W (230 V AC)
Nominal output frequency	60 Hz
	50 Hz
	± 5 % (grid-guided)
	± 0.5 % (self-guided)
Total harmonic distortion factor (THD)	< 3 % (linear load)
	< 8 % (non-linear load)
Electronic current limitation	> 2,5 x I_N (> 200 ms)

Energy storage

Input

Input voltage	24 V DC
Deep discharge protection	20 V DC ... 24 V DC (can be parameterized)
Nominal capacity range	3.4 Ah ... 200 Ah (5x 40 Ah)
Charging current	max. 5 A
End-of-charge voltage	24 V DC ... 31 V DC (temperature compensated)

General

Battery technology	VRLA, VRLA-WTR, LI-ION (see section: Ordering data)
Charge characteristic curve	IU ₀ U
Permissible backup fuse	50 A

Connection data

Input

Position	1.x
----------	-----

Conductor connection

Connection method	Screw connection
rigid	0.2 mm ² ... 6 mm ²
flexible	0.2 mm ² ... 4 mm ²
flexible with ferrule without plastic sleeve	0.2 mm ² ... 4 mm ²
flexible with ferrule with plastic sleeve	0.2 mm ² ... 4 mm ²
rigid (AWG)	30 ... 10
Stripping length	8 mm
Tightening torque	0.5 Nm ... 0.6 Nm

QUINT4-UPS/1AC/1AC/500VA/USB - Uninterruptible power supply



1067327

<https://www.phoenixcontact.com/gb/products/1067327>

Drive form screw head	Slotted L
-----------------------	-----------

Output

Position	2.x
----------	-----

Conductor connection

Connection method	Screw connection
rigid	0.2 mm ² ... 6 mm ²
flexible	0.2 mm ² ... 4 mm ²
flexible with ferrule without plastic sleeve	0.2 mm ² ... 4 mm ²
flexible with ferrule with plastic sleeve	0.2 mm ² ... 4 mm ²
rigid (AWG)	30 ... 10
Stripping length	8 mm
Tightening torque	0.5 Nm ... 0.6 Nm
Drive form screw head	Slotted L

Signal

Position	3.x
----------	-----

Conductor connection

Connection method	Screw connection
rigid	0.2 mm ² ... 1.5 mm ²
flexible	0.2 mm ² ... 1.5 mm ²
flexible with ferrule without plastic sleeve	0.2 mm ² ... 1.5 mm ²
flexible with ferrule with plastic sleeve	0.2 mm ² ... 1.5 mm ²
rigid (AWG)	30 ... 12
Stripping length	8 mm
Tightening torque	0.5 Nm ... 0.6 Nm
Drive form screw head	Slotted L

Battery

Position	4.x
----------	-----

Conductor connection

Connection method	Screw connection
rigid	0.2 mm ² ... 6 mm ²
flexible	0.2 mm ² ... 4 mm ²
flexible with ferrule without plastic sleeve	0.2 mm ² ... 4 mm ²
flexible with ferrule with plastic sleeve	0.2 mm ² ... 4 mm ²
rigid (AWG)	30 ... 10
Stripping length	8 mm
Tightening torque	0.5 Nm ... 0.6 Nm
Drive form screw head	Slotted L

Interfaces

QUINT4-UPS/1AC/1AC/500VA/USB - Uninterruptible power supply



1067327

<https://www.phoenixcontact.com/gb/products/1067327>

Interface	USB (Modbus/RTU)
Number of interfaces	1
Connection method	MINI-USB Type B
Connection marking	5.1
Locking	Screw
Transmission physics	USB 2.0
Maximum cable length	3 m
Electrical isolation	yes

Signaling

Signal input Bat.-Start

Low signal	Connection to SGnd with $< 2.7 \text{ k}\Omega$
High signal	Open ($> 200 \text{ k}\Omega$ between Bat.-Start and SGnd)

Signal input Remote

Low signal	Connection to SGnd with $< 2.7 \text{ k}\Omega$
High signal	Open ($> 35 \text{ k}\Omega$ between Remote and SGnd)

Signal output Alarm

Position	3.x
Signalization designation	Alarm
Position marking	3.1 (Alarm)
Switching output	Transistor output, active
Output voltage	24 V
Continuous load current	$\leq 20 \text{ mA}$
LED status indicator	red

Signal output Battery Mode

Position	3.x
Signalization designation	Bat.-Mode
Position marking	3.2 (Bat.-Mode)
Switching output	Transistor output, active
Output voltage	24 V
Continuous load current	$\leq 20 \text{ mA}$
LED status indicator	yellow

Signal output AC OK

Position	3.x
Signalization designation	AC OK
Position marking	3.3 (AC OK)
Switching output	Transistor output, active
Output voltage	24 V
Continuous load current	$\leq 20 \text{ mA}$
LED status indicator	green

QUINT4-UPS/1AC/1AC/500VA/USB - Uninterruptible power supply



1067327

<https://www.phoenixcontact.com/gb/products/1067327>

Signal output Ready

Position	3.x
Signalization designation	Ready
Position marking	3.4 (Ready)
Switching output	Transistor output, active
Output voltage	24 V
Continuous load current	≤ 20 A
LED status indicator	green

Signal output $P > P_N$

Position	3.x
Signalization designation	$P > P_n$
Position marking	3.5 ($P > P_n$)
Switching output	Transistor output, active
Output voltage	24 V
Continuous load current	≤ 20 mA

Signal ground SGnd

Connection labeling	3.9
Function	Signal ground
Reference potential	For signal inputs and signal outputs

Electrical properties

Number of phases	1.00
------------------	------

Product properties

Product type	AC UPS
Product family	QUINT AC-USV
MTBF (IEC 61709, SN 29500)	445469 h (40 °C)

Insulation characteristics

Protection class	I
Overvoltage category	II
Pollution degree	3 (≤ 130 V AC) 2 (> 200 V AC)

Dimensions

Item dimensions

Width	180 mm
Height	130 mm
Depth	125 mm

Installation dimensions

Installation distance right/left	0 mm / 0 mm
----------------------------------	-------------

QUINT4-UPS/1AC/1AC/500VA/USB - Uninterruptible power supply



1067327

<https://www.phoenixcontact.com/gb/products/1067327>

Installation distance top/bottom	50 mm / 50 mm
----------------------------------	---------------

Mounting

Mounting type	DIN rail mounting
---------------	-------------------

Material specifications

Housing material	Metal
------------------	-------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 60 °C (> 50 °C: 2,5 % / K)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Maximum altitude	≤ 3000 m (> 2000 m: 0,6 % / 100 m)
Max. permissible relative humidity (operation)	≤ 95 %
Shock	20g in all directions (EN 60068-2-27)
Vibration (operation)	5 Hz ... 100 Hz, 0,7g (EN 60068-2-6)

Standards and regulations

Uninterruptible power supply systems

Standard designation	Uninterruptible power supply systems
Standards/specifications	EN 62040-1

Approvals

UL

Identification	UL/C-UL Recognized UL 1778
----------------	----------------------------

EMC data

Low Voltage Directive	Conformance with Low Voltage Directive 2014/35/EC
Interference emission	Noise emission in accordance with EN 62040-2
Noise immunity	Immunity in accordance with EN 62040-2
Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Conducted noise emission	EN 62040-02 (Class C2)

Electrostatic discharge

Standards/regulations	EN 61000-4-2
-----------------------	--------------

Electrostatic discharge

Contact discharge	± 6 kV
Discharge in air	± 8 kV
Comments	Criterion A

Electromagnetic HF field

QUINT4-UPS/1AC/1AC/500VA/USB - Uninterruptible power supply



1067327

<https://www.phoenixcontact.com/gb/products/1067327>

Standards/regulations	EN 61000-4-3
Electromagnetic HF field	
Frequency range	80 MHz ... 6 GHz
Test field strength	10 V/m
Comments	Criterion A
Fast transients (burst)	
Standards/regulations	EN 61000-4-4
Fast transients (burst)	
Input	± 2 kV
	± 2 kV
Output	± 2 kV
Signal	± 2 kV
	± 2 kV (USB)
Comments	Criterion A (B for USB)
Surge voltage load (surge)	
Standards/regulations	EN 61000-4-5
Surge voltage load (surge)	
Signal	1 kV (asymmetrical)
Comments	Criterion B
Input/Output	± 1 kV (symmetrical)
	± 2 kV (asymmetrical)
Conducted interference	
Standards/regulations	EN 61000-4-6
Conducted interference	
Frequency range	0.15 MHz ... 80 MHz
Signal	1 kV (asymmetrical)
Comments	Criterion A
Power frequency magnetic field	
Standards/regulations	EN 61000-4-8
Frequency	50 Hz
Signal	30 A/m
Comments	Criterion A
Criteria	
Criterion A	Normal operating behavior within the specified limits.
Criterion B	Temporary impairment to operational behavior that is corrected by the device itself.

QUINT4-UPS/1AC/1AC/500VA/USB - Uninterruptible power supply




1067327

<https://www.phoenixcontact.com/gb/products/1067327>


Drawings

Block diagram

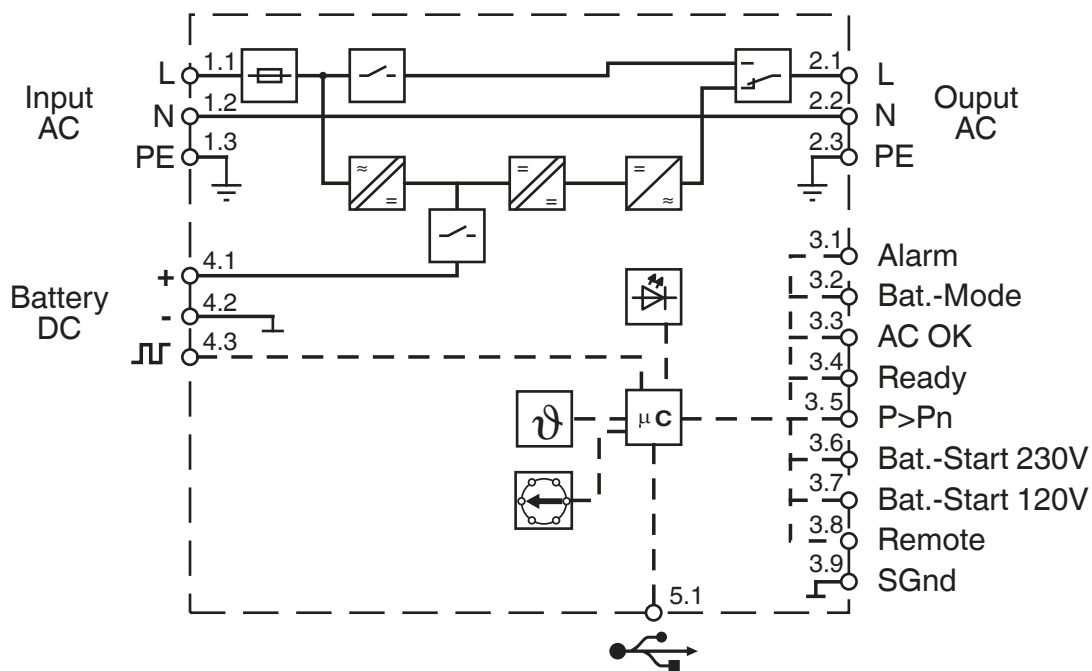

Block diagram

Diagram

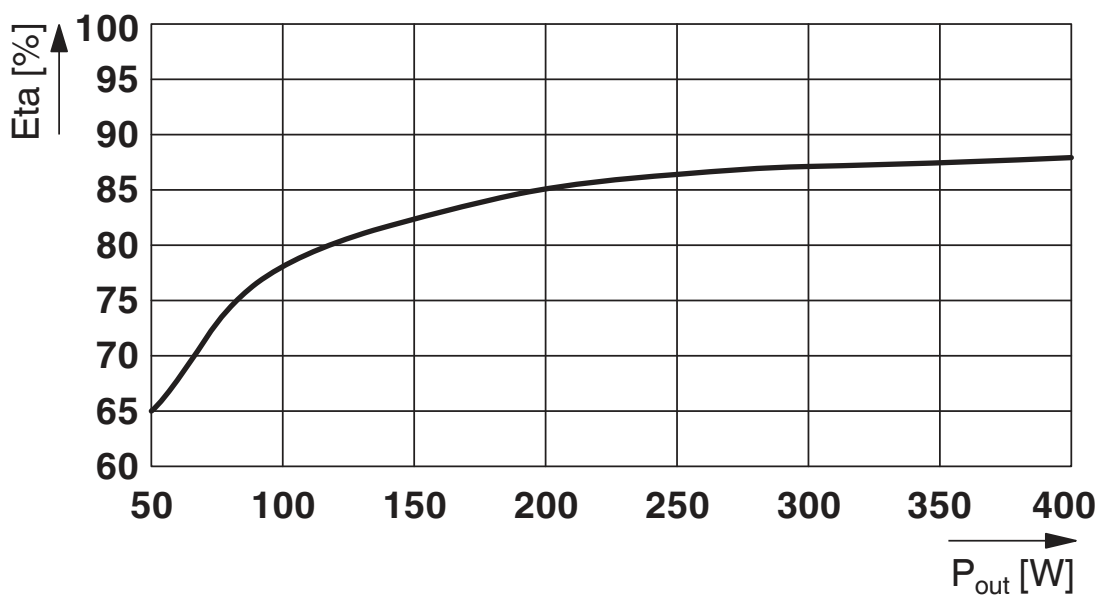

Efficiency (battery operation)


QUINT4-UPS/1AC/1AC/500VA/USB - Uninterruptible power supply



1067327

<https://www.phoenixcontact.com/gb/products/1067327>

Diagram

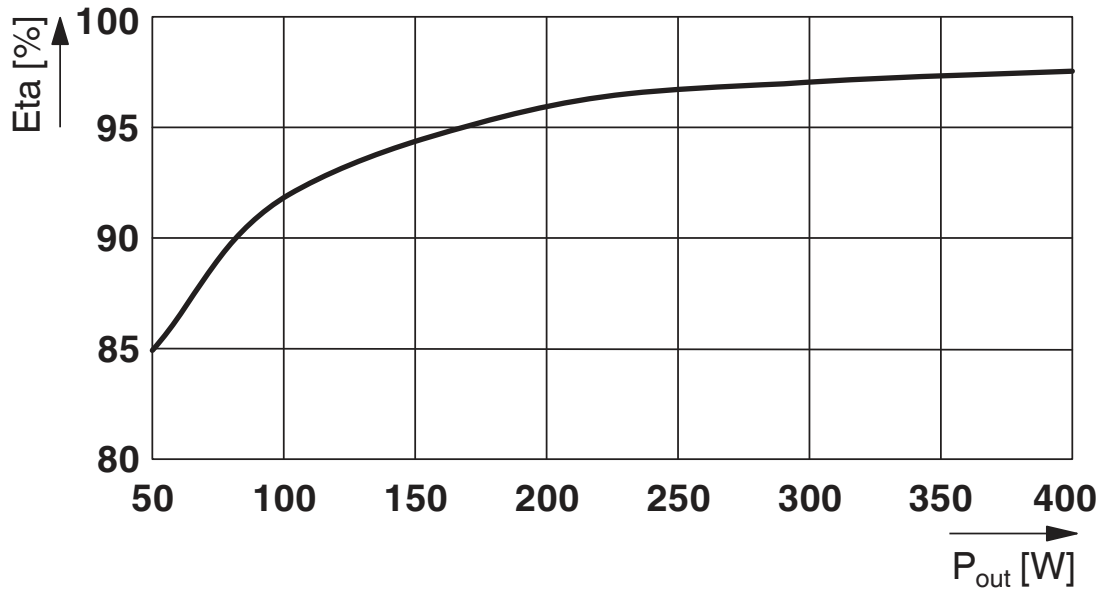

Efficiency (normal operation)

QUINT4-UPS/1AC/1AC/500VA/USB - Uninterruptible power supply



1067327

<https://www.phoenixcontact.com/gb/products/1067327>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/gb/products/1067327>



IECEE CB Scheme
Approval ID: DK-95944-UL



cULus Recognized
Approval ID: FILE E 342453



EAC
Approval ID: RU-DE.B.00184/20



KC
Approval ID: R-R-PCK-1067327



UL Recognized
Approval ID: FILE E 359066



cUL Recognized
Approval ID: FILE E 359066

cULus Recognized

QUINT4-UPS/1AC/1AC/500VA/USB - Uninterruptible power supply



1067327

<https://www.phoenixcontact.com/gb/products/1067327>

Classifications

ECLASS

ECLASS-11.0	27040705
ECLASS-12.0	27040705
ECLASS-13.0	27040705

ETIM

ETIM 9.0	EC000382
----------	----------

UNSPSC

UNSPSC 21.0	39121000
-------------	----------

QUINT4-UPS/1AC/1AC/500VA/USB - Uninterruptible power supply



1067327

<https://www.phoenixcontact.com/gb/products/1067327>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
-------------------------------------	----------------------

EF3.0 Climate Change

CO2e kg	113.197 kg CO2e
---------	-----------------

QUINT4-UPS/1AC/1AC/500VA/USB - Uninterruptible power supply



1067327

<https://www.phoenixcontact.com/gb/products/1067327>

Accessories

UPS-BAT/PB/24DC/4AH - Battery module

1274117

<https://www.phoenixcontact.com/gb/products/1274117>



Battery module, VRLA-AGM, 24 V DC, 4 Ah, automatic detection and communication with QUINT UPS-IQ

UPS-BAT/PB/24DC/7AH - Battery module

1274118

<https://www.phoenixcontact.com/gb/products/1274118>



Battery module, VRLA-AGM, 24 V DC, 7 Ah, automatic detection and communication with QUINT UPS-IQ

QUINT4-UPS/1AC/1AC/500VA/USB - Uninterruptible power supply



1067327

<https://www.phoenixcontact.com/gb/products/1067327>

UPS-BAT/PB/24DC/12AH - Battery module

1274119

<https://www.phoenixcontact.com/gb/products/1274119>



Battery module, VRLA-AGM, 24 V DC, 12 Ah, automatic detection and communication with QUINT UPS-IQ

MINI-SCREW-USB-DATACABLE - Data cable

2908217

<https://www.phoenixcontact.com/gb/products/2908217>



Used for communication between an industrial PC and Phoenix Contact devices with USB-Mini-B connection.

QUINT4-UPS/1AC/1AC/500VA/USB - Uninterruptible power supply



1067327

<https://www.phoenixcontact.com/gb/products/1067327>

FUSE 10A/400V GRL - Fuse

2908358

<https://www.phoenixcontact.com/gb/products/2908358>



Fuse, nominal current: 10 A, length: 31.8 mm, diameter: 6.35 mm

UWA 130 - Mounting adapter

2901664

<https://www.phoenixcontact.com/gb/products/2901664>



2-piece universal wall adapter for securely mounting the device in the event of strong vibrations. The profiles that are screwed onto the side of the device are screwed directly onto the mounting surface. The universal wall adapter is attached on the left/right.

QUINT4-UPS/1AC/1AC/500VA/USB - Uninterruptible power supply



1067327

<https://www.phoenixcontact.com/gb/products/1067327>

UWA 182/52 - Mounting adapter

2938235

<https://www.phoenixcontact.com/gb/products/2938235>



Universal wall adapter for securely mounting the device in the event of strong vibrations. The device is screwed directly onto the mounting surface. The universal wall adapter is attached on the top/bottom.

UPS-BAT/PB/24DC/20AH - Battery module

1348516

<https://www.phoenixcontact.com/gb/products/1348516>



Battery module, VRLA-AGM, 24 V DC, 20 Ah, automatic detection and communication with QUINT UPS-IQ

QUINT4-UPS/1AC/1AC/500VA/USB - Uninterruptible power supply



1067327

<https://www.phoenixcontact.com/gb/products/1067327>

UPS-BAT/PB/24DC/40AH - Battery module

1354641

<https://www.phoenixcontact.com/gb/products/1354641>



Battery module, VRLA-AGM, 24 V DC, 40 Ah, automatic detection and communication with QUINT UPS-IQ

UPS-BAT/VRLA-WTR/24DC/13AH - Battery module

2320416

<https://www.phoenixcontact.com/gb/products/2320416>



Battery module, lead AGM, VRLA technology, 24 V DC, 13 Ah, tool-free battery replacement, automatic detection, and communication with QUINT UPS-IQ

QUINT4-UPS/1AC/1AC/500VA/USB - Uninterruptible power supply



1067327

<https://www.phoenixcontact.com/gb/products/1067327>

UPS-BAT/VRLA-WTR/24DC/26AH - Battery module

2320429

<https://www.phoenixcontact.com/gb/products/2320429>

Battery module, lead AGM, VRLA technology, 24 V DC, 26 Ah, tool-free battery replacement, automatic detection, and communication with QUINT UPS-IQ



UPS-BAT/LI-ION/24DC/120WH - Battery module

2320351

<https://www.phoenixcontact.com/gb/products/2320351>

Battery module, LI-ION technology, 24 V DC, 120 Wh, for ambient temperatures of -20 °C ... 60 °C, automatic detection and communication with QUINT UPS-IQ



QUINT4-UPS/1AC/1AC/500VA/USB - Uninterruptible power supply



1067327

<https://www.phoenixcontact.com/gb/products/1067327>

UPS-BAT/LI-ION/24DC/924WH - Battery module

2908232

<https://www.phoenixcontact.com/gb/products/2908232>



Battery module, LI-ION technology, 24 V DC, 924 Wh, for ambient temperatures of -25 °C ... 60 °C, automatic detection and communication with QUINT UPS-IQ

PLT-SEC-T3-120-FM-UT - Type 3 surge protection device

2907918

<https://www.phoenixcontact.com/gb/products/2907918>



Type 2/3 surge protection, consisting of protective plug and base element, with integrated status indicator and remote signaling for single-phase power supply networks. Nominal voltage: 120 V AC/DC

QUINT4-UPS/1AC/1AC/500VA/USB - Uninterruptible power supply



1067327

<https://www.phoenixcontact.com/gb/products/1067327>

PLT-SEC-T3-230-FM-UT - Type 3 surge protection device

2907919

<https://www.phoenixcontact.com/gb/products/2907919>



Type 2/3 surge protection, consisting of protective plug and base element with screw connection. For single-phase power supply network with integrated status indicator and remote signaling. Nominal voltage: 230 V AC/DC

POWER MANAGEMENT SUITE - Configuration software

1252232

<https://www.phoenixcontact.com/gb/products/1252232>



Configuration and management software

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk