

# FL SWITCH EP6416-HV - Industrial Ethernet Switch



1471544

<https://www.phoenixcontact.com/gb/products/1471544>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Managed switch with sixteen RJ45 ports at 10/100/1000 Mbps and operating temperature of -40 ... +85°C, 100-240 V AC/DC (Nom.) power supply

## Product description

FL SWITCH EP64... advanced managed network switches provide an adaptable platform to meet the electric power industry's increasing requirements for scalable network performance, uptime, and security.

## Your advantages

- Layer 2 and Layer 3 functions
- IEEE 1588 v2 precision timing support
- Support for Access Control Lists (ACL) for traffic filtering, RADIUS, and TACAC's authentication.

## Commercial data

Item number	1471544
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DNN512
Product key	DNN512
GTIN	4063151877323
Weight per piece (including packing)	2,632 g
Weight per piece (excluding packing)	2,006 g
Customs tariff number	85176200
Country of origin	CA

# FL SWITCH EP6416-HV - Industrial Ethernet Switch



1471544

<https://www.phoenixcontact.com/gb/products/1471544>

## Technical data

### Dimensions

Width	82.7 mm
Height	188.39 mm
Depth	197.12 mm

### Mounting

Mounting type	DIN rail mounting
---------------	-------------------

### Interfaces

#### Ethernet

Connection method	RJ45
Note on the connection method	Auto negotiation and autocrossing
Transmission speed	10/100/1000 Mbps
Transmission physics	Copper
Transmission length	100 m (per segment)

### Output data

#### Digital

Output name	Alarm relay output: 24 V DC, 1 A maximum
Output name	Alarm relay output: 24 V DC, 1 A maximum

### Product properties

Product type	Switch
Product family	Managed Switch EP6000

#### Insulation characteristics

Overvoltage category	II
Degree of pollution	2

#### Switch functions

Signal contact control voltage	24 V DC
Signal contact control current	1 A
MAC address table	16k

### Electrical properties

#### Supply

Supply voltage range	100 V AC/DC ... 240 V AC/DC
----------------------	-----------------------------

#### Function

Signal contact control voltage	24 V DC
Signal contact control current	1 A

1471544

<https://www.phoenixcontact.com/gb/products/1471544>

## Connection data

Connection method	Screw connection
-------------------	------------------

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 85 °C (Type tested to 85 °C for 16 hours)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	5 % ... 95 % (non-condensing)
Permissible humidity (storage/transport)	10 % ... 95 % (non-condensing)

## Standards and regulations

Standards/specifications	IEC 61850-3
	IEEE 1613

## Approvals

### Conformity/Approvals

Conformance	CE-compliant
-------------	--------------

## EMC data


Noise immunity	IEC 61850-3, IEEE 1613, EN 61000-6-2: 2005
----------------	--

1471544

<https://www.phoenixcontact.com/gb/products/1471544>

## Drawings

Connection diagram

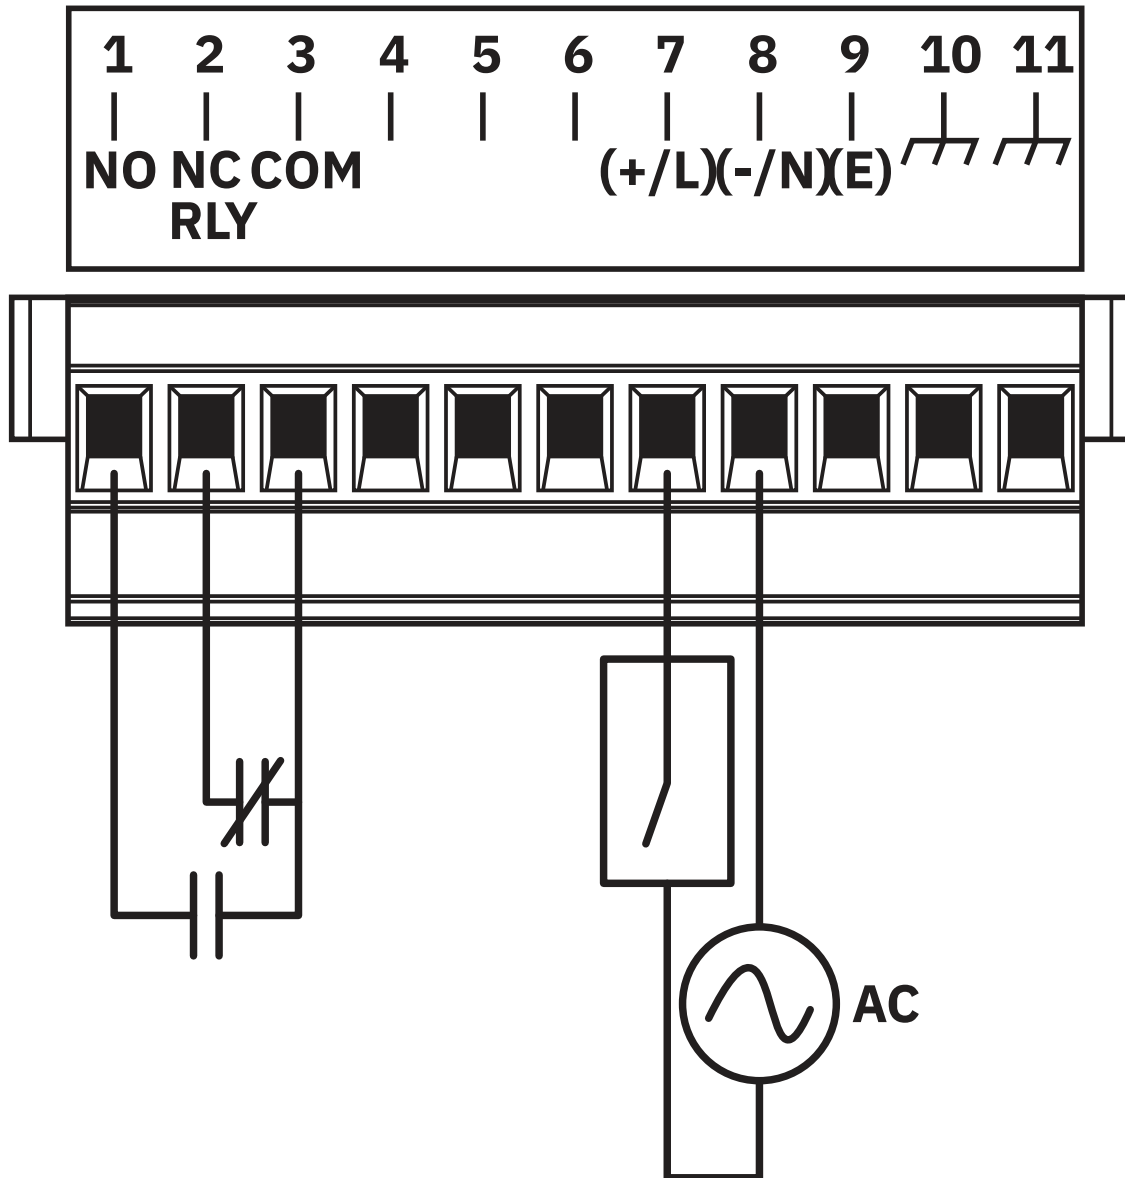

# FL SWITCH EP6416-HV - Industrial Ethernet Switch



1471544

<https://www.phoenixcontact.com/gb/products/1471544>

## Classifications

### ECLASS

ECLASS-11.0	19170401
ECLASS-13.0	19170401

1471544

<https://www.phoenixcontact.com/gb/products/1471544>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c), 7(a), 7(c)-I, 7(c)-II

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	1-Methyl-2-pyrrolidone (NMP)(CAS: 872-50-4)
	N,N-dimethylacetamide(CAS: 127-19-5)
	1, 2-dimethoxyethane; ethylene glycol dimethyl ether (EGDME)(CAS: 110-71-4)
	Hexahydromethylphthalic anhydride(CAS: n/a)
	Lead titanium zirconium oxide(CAS: 12626-81-2)
	Lead titanium trioxide(CAS: 12060-00-3)
	4,4'-isopropylidenediphenol(CAS: 80-05-7)
	1,6,7,8,9,14,15,16,17,17,18,18-Dodecachloropentacyclo[12.2.1.16.9.02,13.05,10]octadeca-7,15-diene ("Dechlorane Plus"™)(CAS: n/a)
	Terphenyl, hydrogenated(CAS: 61788-32-7)
	Lead(CAS: 7439-92-1)
	2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one(CAS: 71868-10-5)

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd  
 Halesfield 13, Telford  
 Shropshire, TF7 4PG  
 01952 681700  
[info@phoenixcontact.co.uk](mailto:info@phoenixcontact.co.uk)