

FL IF 2TX VS-RJ-D - Media module



2832357

<https://www.phoenixcontact.com/gb/products/2832357>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Interface module for connecting twisted pair cable, RJ45, connection direction downward



Commercial data

Item number	2832357
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DNN123
Product key	DNN123
Catalog page	Page 330 (C-6-2019)
GTIN	4017918929121
Weight per piece (including packing)	95 g
Weight per piece (excluding packing)	70 g
Customs tariff number	85366990
Country of origin	DE

FL IF 2TX VS-RJ-D - Media module



2832357

<https://www.phoenixcontact.com/gb/products/2832357>

Technical data

Notes

Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area
----------	---

Product properties

Type	Stand-Alone
Product type	Extension module

System properties

Functionality

Basic functions	Media module for modular managed switch
-----------------	---

Electrical properties

Maximum power dissipation for nominal condition	21.6 W
Transmission medium	Copper

Supply

Supply voltage	via head station
Power supply connection	From FL SWITCH GHS or FXT
Typical current consumption	10 mA


Interfaces

Ethernet

Connection method	RJ45
Transmission speed	10/100 Mbps (connection direction downwards)
Transmission physics	Ethernet in RJ45 twisted pair
Transmission length	100 m (per segment)
No. of channels	2 (RJ45 ports)
Transmission speed	10/100 Mbps (connection direction downwards)
Transmission length	100 m (per segment)

Dimensions

Dimensional drawing



FL IF 2TX VS-RJ-D - Media module



2832357

<https://www.phoenixcontact.com/gb/products/2832357>

Width	31 mm
Height	75 mm
Depth	72.5 mm

Material specifications

Color	green
Flammability rating according to UL 94	V0
Housing material	PA 6.6

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 55 °C (non-condensing)
Ambient temperature (storage/transport)	-20 °C ... 80 °C
Permissible humidity (operation)	10 % ... 95 % (non-condensing)
Permissible humidity (storage/transport)	10 % ... 95 % (non-condensing)
Vibration (operation)	in acc. with IEC 60068-2-6: 5g, 150 Hz

EMC data

Conformance with EMC directives	IEC 61000-6-2 IEC 61000-4-2 (ESD) Criterion B
	IEC 61000-4-3 (immunity to radiated interference) Criterion A
	IEC 61000-4-4 (burst) Criterion A
	IEC 61000-4-5 (surge) Criterion A
	IEC 61000-4-6 (immunity to conducted interference) Criterion A
	IEC 61000-4-8 (immunity to magnetic fields) Criterion A
	EN 55022 (emitted interference) Criterion A
Noise immunity	EN 61000-6-2:2005
Electromagnetic compatibility	Conformance with EMC Directive 2004/108/EC
Noise emission	EN 61000-6-3/-4

Standards and regulations

Free from substances that could impair the application of coating	In acc. with VW specification
---	-------------------------------

Mounting

Mounting type	In the host system
---------------	--------------------


FL IF 2TX VS-RJ-D - Media module

2832357

<https://www.phoenixcontact.com/gb/products/2832357>

Drawings

Dimensional drawing

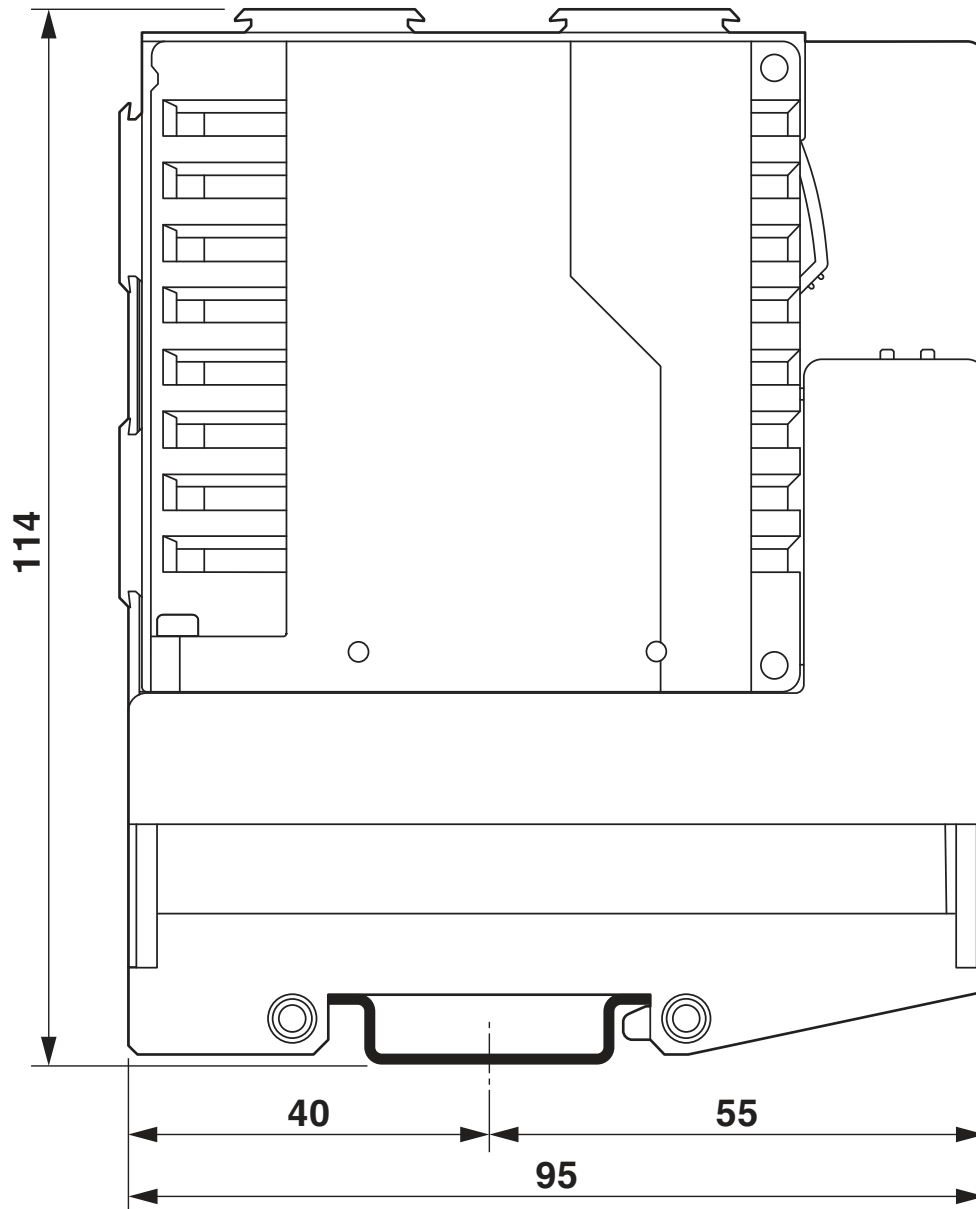

The figure shows a version of the interface module with the head station FL SWITCH MM HS

FL IF 2TX VS-RJ-D - Media module



2832357

<https://www.phoenixcontact.com/gb/products/2832357>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/gb/products/2832357>



cUL Recognized
Approval ID: FILE E 140324



UL Recognized
Approval ID: FILE E 140324



EAC
Approval ID: RU*DE*08.B.00731/19



KC
Approval ID: KCC-REI-PCK-FL283235



cUL Listed
Approval ID: FILE E 199827



UL Listed
Approval ID: FILE E 199827

cULus Recognized

cULus Listed

FL IF 2TX VS-RJ-D - Media module



2832357

<https://www.phoenixcontact.com/gb/products/2832357>

Classifications

ECLASS

ECLASS-11.0	19170411
ECLASS-12.0	19170411
ECLASS-13.0	19170411

ETIM

ETIM 8.0	EC001467
----------	----------

UNSPSC

UNSPSC 21.0	43201500
-------------	----------

FL IF 2TX VS-RJ-D - Media module

2832357

<https://www.phoenixcontact.com/gb/products/2832357>



Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

FL IF 2TX VS-RJ-D - Media module

2832357

<https://www.phoenixcontact.com/gb/products/2832357>

Accessories

FL PLUG RJ45 GR/2 - RJ45 connector

2744856

<https://www.phoenixcontact.com/gb/products/2744856>



RJ45 connector, design: RJ45, degree of protection: IP20, number of positions: 8, 1 Gbps, CAT5 (IEC 11801:2002), material: Plastic, connection method: Crimp connection, connection cross section: AWG 26- 24, cable outlet: straight, color: green, Ethernet

FL PLUG RJ45 GN/2 - RJ45 connector

2744571

<https://www.phoenixcontact.com/gb/products/2744571>



RJ45 connector, design: RJ45, degree of protection: IP20, number of positions: 8, 1 Gbps, CAT5 (IEC 11801:2002), material: Plastic, connection method: Crimp connection, connection cross section: AWG 26- 24, cable outlet: straight, color: green, Ethernet

FL IF 2TX VS-RJ-D - Media module

2832357

<https://www.phoenixcontact.com/gb/products/2832357>



FL CAT5 HEAVY - Data cable

2744814

<https://www.phoenixcontact.com/gb/products/2744814>



CAT5-SF/UTP cable (J-02YS(ST)C HP 2 x 2 x 24 AWG), heavy-duty installation cable, 2 x 2 x 0.22 mm², solid conductor, shielded, outer sheath: 7.8 mm diameter, inner sheath: 5.75 mm ± 0.15 mm diameter

FL CAT5 FLEX - Installation cable

2744830

<https://www.phoenixcontact.com/gb/products/2744830>



By the meter, Installation cable, Ethernet CAT5 (100 Mbps), shielded, PUR halogen-free, water blue RAL 5021, 4-wire (2x2xAWG26/7, SF/UTP), color single wire: white/orange-orange, white/green-green, cable length: Free entry (1.0 ... 1000.0 m)

FL IF 2TX VS-RJ-D - Media module

2832357

<https://www.phoenixcontact.com/gb/products/2832357>



FL CRIMPTOOL - Assembly tool

2744869

<https://www.phoenixcontact.com/gb/products/2744869>

Crimping pliers, for assembling the RJ45 plugs FL PLUG RJ45..., for assembly on site



VS-08-T-G-RJ45/IP20 - RJ45 sleeve housings

1652295

<https://www.phoenixcontact.com/gb/products/1652295>



RJ45 sleeve housing, IP20, for pin insert VS-08-ST-RJ45, with push-pull interlocking for panel mounting frames, inverted design, for Factoryline modular managed switches, for cable cross section 5.0 mm ... 6.5 mm

FL IF 2TX VS-RJ-D - Media module

2832357

<https://www.phoenixcontact.com/gb/products/2832357>



FL RJ45 PROTECT CAP - Dust protection

2832991

<https://www.phoenixcontact.com/gb/products/2832991>



Dust protection caps for RJ45 socket

ZBF 29:UNBEDRUCKT - Zack Marker strip, flat

0829003

<https://www.phoenixcontact.com/gb/products/0829003>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 29 mm, lettering field size: 29 x 6.4 mm, Number of individual labels: 30

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk