


SKL | RCL|SKL

EMC Shield clamps, single
EMC Shield clamps on cable lugs

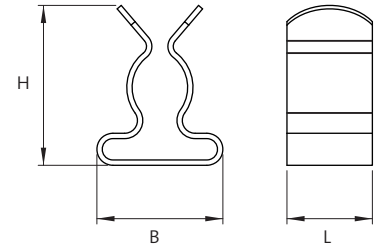

Product description

SKL shield clamps are easy to use and effective in earthing single cable shields.

Shield clamps can be easily attached via rivet.

Advantages & benefits

- Large contact area
- Easy assembly
- The spring design requires no adjustments and will permanently maintain contact to the cable shield
- Shock and vibration resistant, maintenance free
- Designed for high density applications

Specifications

Material
SKL-clamp Spring steel, zinc plated

Type	Order No.	Clamping range [mm]	Dimensions L x B x H [mm]	Fixing hole	PU
MSKL 3-12	37600	3 - 12 mm	8 x 15.1 x 20.5	3.2 mm	50
MSKL 8-18	37602	8 - 18 mm	8 x 20 x 27	3.2 mm	50
SKL 1.5-3	36200	1.5 - 3 mm	8 x 11.8 x 13	3.1 mm	50
SKL 3-6	36202	3 - 6 mm	8 x 11.8 x 13.6	3.1 mm	50
SKL 6-8	36204	6 - 8 mm	8 x 11.8 x 15	3.1 mm	50
SKL 8-11	36205	8 - 11 mm	8 x 14 x 20	3.1 mm	50
SKL 11-17	36206	11 - 17 mm	8 x 21 x 27.5	3.1 mm	50
SKL 17-22	36207	17 - 22 mm	8 x 26.5 x 34.5	3.1 mm	50
SKL 22-30	36208	22 - 30 mm	8 x 35 x 39.5	3.1 mm	50
SKL 30-38	36209	30 - 38 mm	11 x 48.3 x 54.7	5.2 mm	5
SKL 38-48	36213	38 - 48 mm	13 x 55 x 67	2 x 5.2 mm Hole spacing: 9.2 mm	5

Type	Order No.	Shield diameter	PU
NEW RCL 0.5-1.5mm² SKL 1.5-3	36296.1	1.5 - 3 mm	25
RCL 0.5-1.5mm² MSKL 3-12	36296.2	3 - 12 mm	25
RCL 1.0-2.5mm² SKL 1.5-3	36297.1	1.5 - 3 mm	25
RCL 1.0-2.5mm² MSKL 3-12	36297.2	3 - 12 mm	25
RCL 4-6mm² SKL 1.5-3	36298.1	1.5 - 3 mm	25
RCL 4-6mm² MSKL 3-12	36298.2	3 - 12 mm	25

