

## I/O Modules for Industrial Automation Applications



**Be certain.  
Belden.**

**Fieldbus/Network I/O Modules  
and Passive Distribution Boxes  
for On-Machine Applications**



**ELECTROUSTIC**  
DISTRIBUTION OF CONNECTIVITY SOLUTIONS  
+44 (0)1908 307200 [www.electroustic.co.uk](http://www.electroustic.co.uk) [sales@electroustic.co.uk](mailto:sales@electroustic.co.uk)



**lumbergautomation**

A **BELDEN** BRAND

## **Belden® Solutions**

In a world moving toward interoperability, visibility is vital to operators as they face increasing demands to receive, analyze and share data. Belden's industrial connectivity solutions address these needs head on. With more connected machines, increasing data volumes and productivity demands at an all-time high, customers in challenging environments can count on Belden cable, Lumberg Automation™ and Hirschmann™ industrial connectors for a complete communications infrastructure designed to last. Belden's customized systems provide robust performance and reliability for a wide range of industrial automation applications.

**Be certain.  
Belden.**



## Content

Introduction	Page
Compact I/O Modules from Lumberg Automation™	4–5
Matrix Module Variants I/O Modules	5
I/O Modules Active – Stand-Alone (LioN Series)	Page
Stand-Alone Designs	6–7
Matrix Module Variants I/O Modules Stand-Alone Designs	8–9
PROFINET	11–20
EtherNet/IP	21–30
PROFIBUS	31–50
DeviceNet™	51–68
CANopen®	69–78
Interbus®	79–88
AS-Interface	89–100
I/O Systems Active – Modular (LioN-Link Series)	Page
BusHeads	101–109
I/O Modules	110–124
Passive Distribution Boxes (ASB Series)	Page
General Information and Matrix	125–129
M8 Passive Distribution Boxes	130–133
M12 Passive Distribution Boxes	134–154
Index	Page
Part Number Index	155–157
Explanation of Product Characteristics	158

A wide range of applications, space-saving designs, and technical know-how for every environment

## About Lumberg Automation™

Lumberg Automation™ is a Belden brand that for more than 30 years has stood for high-quality connectors and wiring components for all areas of industrial automation technology. The products support intelligent wiring solutions, such as electronic field bus, connector and distribution box systems, for industrial automation applications. Our end-to-end wiring concepts for mechanical and plant engineering are ideal for automotive body and assembly and powertrain manufacturing, handling/assembly applications and food and beverage machinery.

### Why Lumberg Automation™

Compact design, chemical resistance and high mechanical and electrical loading capacity are the outstanding features of Lumberg Automation™ products. From single- and double-ended cordsets to centralized and decentralized field bus components, Lumberg Automation™ offers optimal solutions at field level.

### A Professional Team, on Hand to Offer Help and Advice

Thanks to technical expertise in wiring and field bus technology, and wide-ranging industry-specific expertise, our organization guarantees close cooperation with the customer and responds quickly to customer-specific requirements.

Enjoy the benefits of  
our experience and  
innovations

## Compact I/O Modules from Lumberg Automation™

### General Information

The growing level of automation in all areas of manufacturing requires increasingly complex wiring and cabling techniques. Apart from the high costs of assembly, service problems are an inevitable consequence of complex and obscure wiring.

Passive and active I/O distribution boxes are used in wiring technology to solve this problem while optimizing systems. There are two alternative solutions to on-machine wiring. We define these as passive and active systems. Passive wiring systems combine signals from sensors and actuators and transfer those signals via a single common control cable. Active wiring systems are more intelligent and the connection to the control cabinet is made by a standard fieldbus system. There are a number of fieldbus systems in place today. Lumberg Automation™ supports PROFIBUS, DeviceNet™, CANopen®, Interbus, AS-Interface as well as Ethernet (Modbus TCP), EtherNet/IP and PROFINET.

Traditional point-to-point wiring techniques from the end-effector (sensor/actuator) to the control cabinet can be replaced by on-machine active or passive I/O modules or distribution boxes. By using an on machine distributed I/O system, significant reductions in installation and maintenance time is achieved and the overall performance of the system is improved. To insure signal quality, industry standard M8 and M12 rounded over molded quick-disconnect connectors are used to complete the wiring installation.

Overall, this means a considerable reduction in the effort required for ordering and storage as well as planning, configuring and commissioning machines and automated systems.

### Customer Benefits

- Increased efficiency: everything from a single source, when different systems are being used.
- Cost savings: extremely robust design with IP67 protection class, the modules can be installed directly on the machine to minimize traditional field wiring techniques.
- High operational reliability and system availability: robust design – shock and vibration proof.

### Product Features

- Protection against dust and liquids: because the distribution boxes and I/O modules offer IP67 protection class, installation can be performed directly on site near the actuators and sensors and additional protection by means of a control cabinet are no longer required.
- Vibration and shock resistance: an additional advantage of the distribution boxes and I/O modules is the high level of vibration resistance, while providing increased security of the electrical wiring.
- Wide range:
  - Active, passive, modular distribution boxes and I/O modules with between 4 and 16 slots
  - Different housing variants, in plastic, stainless steel or die-cast zinc depending on the ambient conditions
  - Various configurations: depending on the space requirements, small (LioN-S, LioN-Link, ASB-S) or compact (LioN-M, LioN-R, LioN-Classic, ASB-Classic, ASB-R) versions with M8 or M12 slots (one or two-row)





## Applications


### Mechanical engineering

Connection of sensors and actuators, for example, magnetic valves (communication between sensors/actuators and control level).

- Metal processing machines
- Material handling and robotics
- Food & beverage (packaging machines, handling, transport)
- Woodworking machines and equipment, etc.

### Automotive

- Engine and transmission manufacturing
- Welding robots (bodywork)
- Assembly/handling

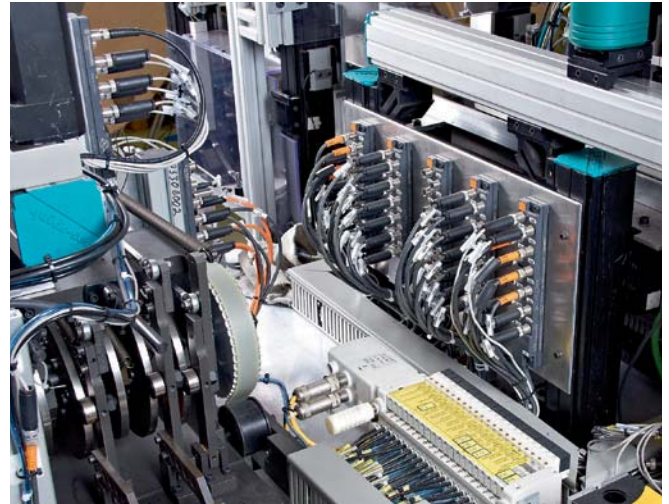

## Matrix Module Variants I/O Modules

Function	IP67* Stand-Alone Housing					IP67 Housing Modular, Plastic	IP67* Housing Passive				
	Plastic			Metal	Stainless Steel		Plastic			Metal	Stainless Steel
	LioN-S	LioN-M	LioN-Classic	LioN-R	LioN-Steel		ASB-S	ASB-M	ASB-Classic	ASB-R	ASB-Steel

### Protocols

Industrial Ethernet											
PROFINET	–	✓	–	✓	–	✓	N/A	N/A	N/A	N/A	N/A
EtherNet/IP	–	✓	–	✓	–	–	N/A	N/A	N/A	N/A	N/A
Fieldbus											
PROFIBUS	✓	✓	✓	✓	–	✓	N/A	N/A	N/A	N/A	N/A
DeviceNet™	✓	✓	✓	–	–	✓	N/A	N/A	N/A	N/A	N/A
CANopen®	✓	✓	✓	–	–	✓	N/A	N/A	N/A	N/A	N/A
Interbus®	–	–	✓	–	–	–	N/A	N/A	N/A	N/A	N/A
AS-Interface	–	–	✓	–	✓	–	N/A	N/A	N/A	N/A	N/A
Passive											
Wired	N/A	N/A	N/A	N/A	N/A	N/A	✓	✓	✓	✓	✓
Pluggable	N/A	N/A	N/A	N/A	N/A	N/A	✓	✓	✓	✓	–

\* Also IP68 or IP69K, depending on the design



We offer you the  
best solution for  
every requirement

## Active I/O Modules and Stand-Alone Designs (LioN-S-, LioN-M-, LioN-R-, LioN-Classic Series)

### General Information

In order to ensure high availability of machines and systems, I/O modules installed in harsh industrial environments must be able to meet the highest electro-mechanical demands. Thanks to their housing material and innovative encapsulation techniques, the LioN Series of distribution boxes and I/O modules offer full protection for the electronics.

#### LioN-S and -M

**LioN-S:** Because of their compact construction, the LioN-S modules with M8 connections are ideally suited for systems where space is limited. In addition, the modules in this series can be secured to the front, side or directly on the machines profile rails.

**LioN-M:** The convenient and vibration-proof I/O modules with M12 connection technology support PROFINET, Ethernet/IP, PROFIBUS and DeviceNet™. The different configurations can be realized with the assistance of a universal module, both for LioN-S and for LioN-M I/O modules. Each individual channel can be used either as an input or an output. This offers excellent flexibility for planning or for making changes during commissioning and subsequent upgrades.

- Simple planning and cost-effective storage of spare parts with universal I/O functionality.
- Small connection with various installation possibilities.
- Low empty weight – ideally suitable for assembly and handling applications.
- Fast commissioning, through simple and comprehensive diagnostics.

#### LioN-R

The new ruggedized I/O modules in the LioN series (LioN-R) have a robust design and a high level of functionality. They provide a secure connection of actuators and sensors to the control cabinet, even under extreme environmental conditions.

- The fully enclosed metal housing guarantees optimal mechanical stability and maximum protection against the most adverse environmental conditions.
- Galvanic isolation between sensors and actuators and the Ethernet/field bus protocol, together with short-circuit proof outputs and the "easy diagnostics" concept, ensures maximum availability of machines and systems.

#### LioN-Classic

The LioN-Classic modules are available in a sturdy molded plastic housing, for example, with M23 connection technology for hybrid cables (power supply and bus lines in a single cable).

- Excellent reliability even under harsh environmental conditions – proven for decades.
- Wide choice of options for the different field bus protocols.



### Customer Benefits

- Cost savings/profit increases
- Simple and fast installation and maintenance: the time required is minimized since the signals are bundled and transmitted via the field bus/Ethernet
- Flexibility: all standard field bus systems are supported
- Reliability: fail-safe modules with long service life (long-term stability)
- Rapid sourcing of spare parts, thanks to a large global sales network

### Product Features

- Environmental temperature depending on type from -25°C to +60°C
- Materials (depending on type of module)
  - Housing: die-cast zinc, V4A, PBT or PUR
  - Inserts: PA
  - Contacts: CuZn, pre-nickel and gold plated
- Mechanical data
  - Protection class IP67/IP68/IP69K
- Electrical data
  - Nominal current at +40°C: 0.5 A to 2 A per channel and up to 12 A per module
  - Nominal voltage: 18 to 30 V DC



## Matrix Module Variants I/O Modules Stand-Alone Designs



Function	IP67* Stand-Alone Housing				
	Plastic			Metal	Stainless Steel
	LioN-S	LioN-M	LioN-Classic	LioN-R	LioN-Steel

### Industrial Ethernet Protocols

PROFINET					
16 Digital IN	–	✓	–	✓	–
16 Digital OUT (1.6 A)	–	–	–	✓	–
8 Digital IN/8 Digital OUT (1.6 A)	–	–	–	✓	–
16 Digital IN/OUT (1.6 A)	–	✓	–	–	–
EtherNet/IP					
16 Digital IN	–	✓	–	✓	–
16 Digital OUT (1.6 A)	–	–	–	✓	–
8 Digital IN/8 Digital OUT (1.6 A)	–	–	–	✓	–
16 Digital IN/OUT (1.6 A)	–	✓	–	–	–

### Fieldbus Protocols

PROFIBUS					
8 Digital IN	✓	–	✓	–	–
16 Digital IN	–	✓	✓	✓	–
8 Digital OUT (2 A)	–	–	✓	–	–
16 Digital OUT (0.5/1.6 A)	–	–	✓	✓	–
8 Digital IN/4 Digital OUT (2 A)	–	–	✓	–	–
8 Digital IN/8 Digital OUT (0.5 A)	–	–	✓	–	–
8 Digital IN/8 Digital OUT (1.6 A)	–	–	–	✓	–
16 Digital IN/OUT (1.6 A)	–	✓	–	–	–
8 Digital IN/OUT (2 A)	✓	–	–	–	–
DeviceNet™					
8 Digital IN	✓	–	–	–	–
16 Digital IN	–	✓	✓	–	–
8 Digital OUT (2 A)	–	–	✓	–	–
16 Digital OUT (0.7 A)	–	–	✓	–	–
8 Digital IN/8 Digital OUT (0.7 A)	–	–	✓	–	–
16 Digital IN/OUT (1.6 A)	–	✓	–	–	–
8 Digital IN/OUT (0.5 A)	✓	–	–	–	–

\* Also IP68 or IP69K, depending on the design





Function	IP67* Stand-Alone Housing				
	Plastic			Metal	Stainless Steel
	LioN-S	LioN-M	LioN-Classic	LioN-R	LioN-Steel

#### Fieldbus Protocols

CANopen®					
8 Digital IN	✓	–	–	–	–
16 Digital IN	–	–	✓	–	–
8 Digital OUT (2 A)	–	–	✓	–	–
16 Digital OUT (0.7 A)	–	–	✓	–	–
8 Digital IN/8 Digital OUT (0.7 A)	✓	–	✓	–	–
Interbus®					
8 Digital IN	–	–	✓	–	–
16 Digital IN	–	–	✓	–	–
8 Digital OUT (2 A)	–	–	✓	–	–
8 Digital IN/4 Digital OUT (2 A)	–	–	✓	–	–
AS-Interface					
4 Digital IN	–	–	✓	–	✓
8 Digital IN	–	–	✓	–	–
4 Digital OUT (2 A)	–	–	✓	–	–
2 Digital IN/2 Digital OUT (2 A)	–	–	✓	–	–
4 Digital IN/4 Digital OUT (2 A)	–	–	✓	–	✓

\* Also IP68 or IP69K, depending on the design

CANopen







# I/O Modules Active – Stand-Alone: PROFINET

Be certain. Belden.



## PROFINET – Process Field Network



PROFINET (Process Field Network) is an open Industrial Ethernet Standard for automation from Profibus & Profinet International (PI). PROFINET uses the Ethernet standard, is a realtime-capable system and is standardized under IEC 61158 and IEC 61784. PROFINET minimizes the costs of installation, engineering and commissioning for manufacturers of machines and systems. Operators can extend their systems with ease and at the same time benefit from a high level of system availability.

The PROFI-safe safety technology familiar from PROFIBUS is also available for PROFINET. PROFIBUS systems and other field buses such as Interbus® and DeviceNet™ can be implemented via gateways in any mixed installations comprising field bus and PROFINET-based subsystems.

PROFINET also allows use of web technologies by means of the Ethernet-based protocol – access to a web server integrated in the field devices. This allows addressing, diagnostic and other information to be retrieved easily across network boundaries using standard web browsers.



Universal functionality  
for cost-effective and  
reliable solutions

## General Technical Data

### Transmission medium

- 4 or 8-wire (2 or 4-pair) shielded cable as per ISO/IEC 11801 Edition 2.0, IEC 61156-1, IEC 61156-5 (Minimum Category 5)
- Optical fiber
- Hybrid cable for transmitting data and energy

### Network topology

- Line structure or structured cabling using switches

### Number of devices

- Arbitrary, depends on network structure

### Reliable transmission rates and segment lengths

- Max. 100 Mbit/s (Fast Ethernet)

### Configuration of devices

Configuration of the individual devices is performed on the basis of GSDML files (device master file in XML format), provided by the manufacturer for every slave. The GSDML files for Lumberg Automation™ bus modules can be downloaded at [www.lumberg-automation.com/downloads](http://www.lumberg-automation.com/downloads).

### Addressing

Addressing is performed based on a symbolic device name assigned by the DCP protocol.










# **Matrix PROFINET**

Function	Slots Bus Type		Slots I/O Type		Slots Power Type		
	M12	M23	M8	M12	M12	M23	7/8"
<b>PROFINET</b>							
<b>LioN-R</b>							
16 Digital IN	✓	–	–	✓	–	–	✓
16 Digital OUT (1.6 A)	✓	–	–	✓	–	–	✓
8 Digital IN/8 Digital OUT (1.6 A)	✓	–	–	✓	–	–	✓
<b>LioN-M</b>							
8 Digital IN	✓	–	–	✓	–	–	✓
16 Digital IN	✓	–	–	✓	–	–	✓
16 Digital IN/OUT (1.6 A)	✓	–	–	✓	–	–	✓
<b>Accessories PROFINET</b>							
Cord sets, single-ended	✓	–	–	✓	–	–	✓
Cord sets, double-ended	✓	–	–	✓	–	–	✓
Field attachable connectors	✓	–	–	✓	–	–	✓
T-connectors	✓	–	–	✓	–	–	✓



## PROFINET – Digital Inputs

### Technical Information

Product Description		
Type	0980 ESL 801-PNET 16DI-M12-R	0980 ESL 701
	<div></div> <div></div>	<div></div> <div></div> <div></div>
Description	LioN-R PROFINET device with 16 digital input channels, M12 LAN connection, 4-poles, D-coded, 7/8" power supply, 5-poles	LioN-M PROFINET device with 16 digital input channels, M12 LAN connection, D-coded, 7/8" power supply, 5-poles
Technical Data		
Protection Class	IP67	
Environmental Temperature	-10°C to +60°C	
Weight	620 g	380 g
Bus System		
ID Number	0x0304	0x0303
GSD File	GSDML-V2.3-LumbergAutomation-LionR-980ESL80x-20130411.xml	GSDML-V2.3-LumbergAutomation-LionM-0980ESL70x-20130902.xml
Transmission Rate	10/100 Mbit/s	
Address Range	0 to 255	–
System/Sensors Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Power Consumption	typ. 90 mA	
Input Power Supply		
Voltage Range	19 to 30 V DC	
Sensor Current	200 mA (at T <sub>amp</sub> +30°C)	
Indicator	LED green	
Inputs		
Rated Input Current	24 V DC	
Number of Digital Channels	16	
Status Indicator	LED white per channel + yellow	LED yellow per channel
Diagnostic Indicator	LED red per port	LED red per socket
Included in Delivery		
M12 Dust Covers	4 pieces	
Attachable Labels	10 pieces	




### Bit Assignment


Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
Byte 1	8B	8A	7B	7A	6B	6A	5B	5A

**Diagnostic Indication**

LED	Indicator	Condition
Us	Green	Logic/sensor power supply
U <sub>L</sub>	Green	Actuator power supply
1...8 A	Yellow	Channel status
1...8 DIA A	Red	Periphery error
1...8 B	White	Channel status
1...8 DIA B	Red	Periphery error
P1 Lnk/Act	Green Yellow blinking Off	Connection to a PROFINET device I/O device exchanging data No connection to another device
P2 Lnk/Act	Green Yellow blinking Off	Connection to a PROFINET device I/O device exchanging data No connection to another device
BF	Red Off	Bus error, no data exchange with I/O controller via PROFINET No error message
DIA	Red Red blinking Off	Common indicator for periphery errors Firmware update No error message

**Pin Assignment**

LAN Connection M12, D-coded	Power Supply 7/8"	In-/Output M12
 <p>1 = TD+ 2 = RD+ 3 = TD- 4 = RD- Housing = shielded</p>	 <p>1 = GND (0 V) 2 = GND (0 V) 3 = Earth/FE 4 = +24 V 5 = +24 V</p>	 <p>1 = +24 V 2 = IN/OUT B 3 = GND (0 V) 4 = IN/OUT A 5 = Earth/FE Housing = FE</p>

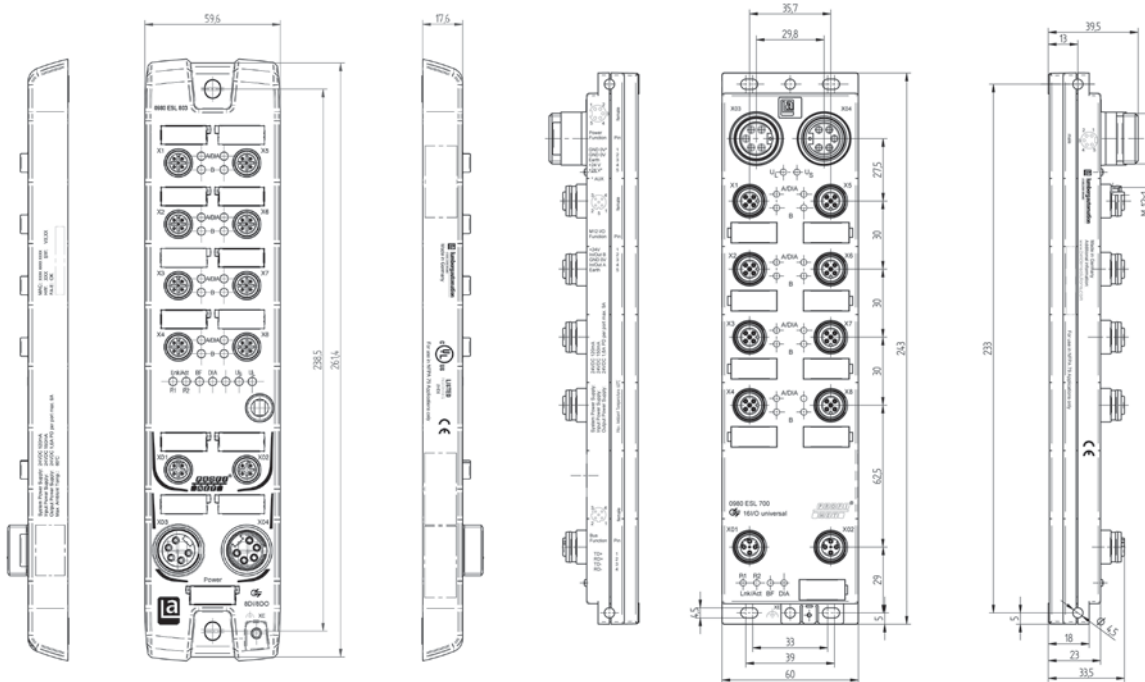





0980 ESL 801-PNET

0980 ESL 701

## PROFINET – Digital Outputs and Digital In- and Outputs

### Technical Information

Product Description		
Type	0980 ESL 802-PNET 16DO-M12-R	0980 ESL 803-PNET 8DI/8DO-M12-R
	<div></div>	<div></div>
Description	LioN-R PROFINET device, 16 digital output channels with galvanic isolation, M12 LAN connection, 4-poles, D-coded, 7/8" power supply, 5-poles	LioN-R PROFINET device, 8 digital input and 8 output channels with galvanic isolation, M12 LAN connection, 4-poles, D-coded, 7/8" power supply, 5-poles
Technical Data		
Protection Class	IP67	
Environmental Temperature	-10°C to +60°C	
Weight	620 g	
Bus System		
ID Number	0x0304	
GSD File	GSDML-V2.3-LumbergAutomation-LionR-980ESL80x-20130411.xml	
Transmission Rate	10/100 Mbit/s	
Address Range	0 to 255	
Inputs		
Rated Input Current	–	24 V DC
Number of Digital Channels	–	8
Status Indicator	–	LED white per channel
Diagnostic Indicator	–	LED red per port
Output Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Reverse Polarity Protection	yes/permanent inverse polarity protection	
Indicator	LED green	
Outputs		
Rated Output Current	1.6 A per channel	
Short Circuit-proof	yes	
Max. Current Carrying Capacity	9 A per module	
Number of Digital Channels	16	8
Status Indicator	LED white per channel + yellow	
Diagnostic Indicator	LED red per port	
Included in Delivery		
M12 Dust Covers	4 pieces	
Attachable Labels	10 pieces	

### Bit Assignment




Bit	7	6	5	4	3	2	1	0
M12 Output 16DO								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
Byte 1	8B	8A	7B	7A	6B	6A	5B	5A
M12 Input 8DI								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
M12 Output 8DO								
Byte 0	8B	8A	7B	7A	6B	6A	5B	5A




**Diagnostic Indication**

LED	Indicator	Condition
Us	Green	Logic/sensor power supply
U <sub>L</sub>	Green	Actuator power supply
1...8 A	Yellow	Channel status
1...8 DIA A	Red	Periphery error
1...8 B	White	Channel status
1...8 DIA B	Red	Periphery error
P1 Lnk/Act	Green Yellow blinking Off	Connection to a PROFINET device I/O device exchanging data No connection to another device
P2 Lnk/Act	Green Yellow blinking Off	Connection to a PROFINET device I/O device exchanging data No connection to another device
BF	Red Off	Bus error, no data exchange with I/O controller via PROFINET No error message
DIA	Red Red blinking Off	Common indicator for periphery errors Firmware update No error message

**Pin Assignment**



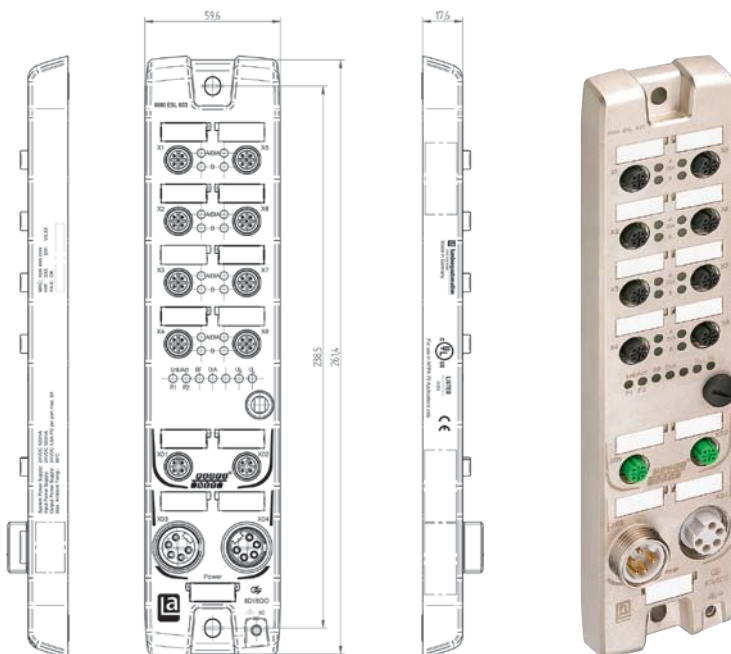


LAN Connection M12, D-coded	Power Supply 7/8"	In-/Output M12
 <p>1 = TD+ 2 = RD+ 3 = TD- 4 = RD- Housing = shielded</p>	 <p>1 = GND (0 V) Actuators 2 = GND (0 V) Logic/Sensors 3 = Earth/FE 4 = +24 V Logic/Sensors 5 = +24 V Actuators Housing = FE</p>	 <p>1 = +24 V 2 = IN/OUT B 3 = GND (0 V) 4 = IN/OUT A 5 = Earth/FE Housing = FE</p>



0980 ESL 802/803-PNET

## PROFINET – Universal

### Technical Information

Product Description	
Type	0980 ESL 700
Description	    
	LioN-M PROFINET device with 16 digital I/O channels, channels can be used universally as inputs or outputs, M12 LAN connection, D-coded, 7/8" power supply, 5-poles
Technical Data	
Protection Class	IP67
Environmental Temperature	-10°C to +60°C
Weight	380 g
Bus System	
ID Number	0x0303
GSD File	GSDML-V2.3-LumbergAutomation-LionM-0980ESL70x-20130902.xml
Transmission Rate	10/100 Mbit/s
System/Sensors Power Supply	
Rated Voltage	24 V DC
Voltage Range	19 to 30 V DC
Power Consumption	typ. 90 mA
Input Power Supply	
Voltage Range	19 to 30 V DC
Sensor Current	200 mA (at T <sub>amp</sub> +30°C)
Indicator	LED green
Inputs	
Rated Input Current	24 V DC
Number of Digital Channels	max. 16
Status Indicator	LED yellow per channel
Diagnostic Indicator	LED red per socket
Output Power Supply	
Rated Voltage	24 V DC
Voltage Range	19 to 30 V DC
Reverse Polarity Protection	yes/antiparallel diode
Indicator	LED green
Outputs	
Rated Output Current	1.6 A per channel
Short Circuit-proof	yes
Max. Current Carrying Capacity	9 A (12 A) per module
Number of Digital Channels	max. 16
Status Indicator	LED yellow per channel
Diagnostic Indicator	LED red per socket
Included in Delivery	
M12 Dust Covers	4 pieces
Attachable Labels	10 pieces




### Bit Assignment


Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
Byte 1	8B	8A	7B	7A	6B	6A	5B	5A
M12 Output								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
Byte 1	8B	8A	7B	7A	6B	6A	5B	5A

**Diagnostic Indication**

LED	Indicator	Condition
Us	Green	Logic/sensor power supply
UL	Green	Actuator power supply
1...8 A	Yellow	Channel status
1...8 DIA A	Red	Periphery error
1...8 B	Yellow	Channel status
1...8 DIA B	Red	Periphery error
P1 Lnk/Act	Green Yellow blinking Off	Connection to a PROFINET device I/O device exchanging data No connection to another device
P2 Lnk/Act	Green Yellow blinking Off	Connection to a PROFINET device I/O device exchanging data No connection to another device
BF	Red Off	Bus error, no data exchange with I/O controller via PROFINET No error message
DIA	Red Red blinking Off	Common indicator for periphery errors Firmware update No error message

**Pin Assignment**

LAN Connection M12, D-coded	Power Supply 7/8"	In-/Output M12
 <p>1 = TD+ 2 = RD+ 3 = TD- 4 = RD- Housing = shielded</p>	 <p>1 = GND (0 V) Actuators 2 = GND (0 V) Logic/Sensors 3 = Earth/FE 4 = +24 V Logic/Sensors 5 = +24 V Actuators Housing = FE</p>	 <p>1 = +24 V 2 = IN/OUT B 3 = GND (0 V) 4 = IN/OUT A 5 = Earth/FE Housing = FE</p>

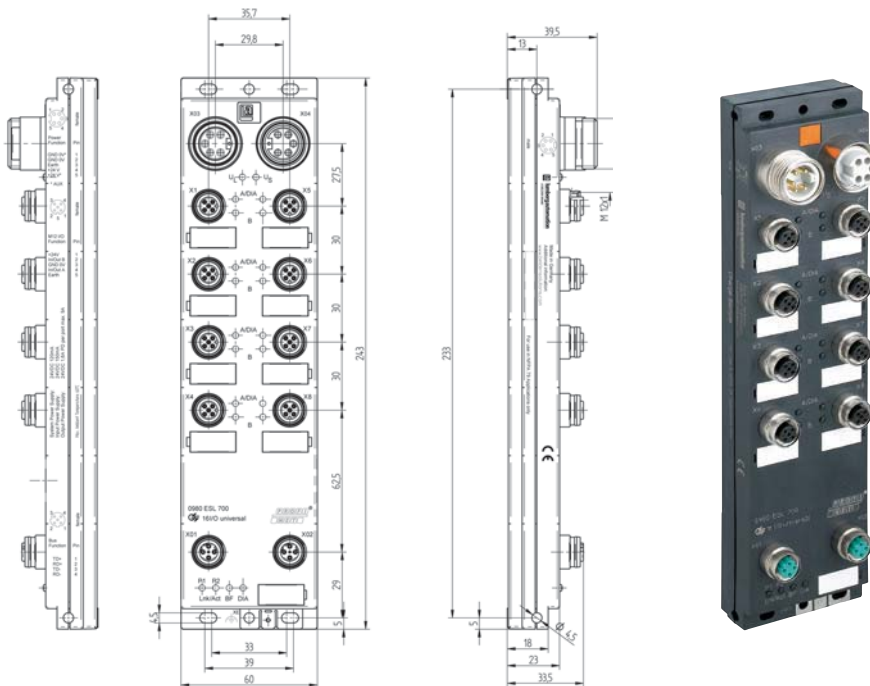

0980 ESL 700







# I/O Modules Active – Stand-Alone: EtherNet/IP



**Be certain. Belden.**

## **EtherNet Industrial Protocol**



A procedure was developed in 1998 by a ControlNet International working group for adapting the application protocol, the Common Industrial Protocol, to Ethernet. EtherNet/IP was published as an official industrial standard based on this procedure in March 2000.

EtherNet/IP (EtherNet Industrial Protocol, or EIP for short) is a real-time protocol used primarily in automation technology, and is promoted by more than 150 manufacturers. Based on the TCP and UDP standards, EtherNet/IP supports continuity between the office and production network. The web server integrated in the Logix control interface module can be used during startup (diagnostics) of EtherNet/IP networks as well as web servers available in other EtherNet/IP equipment.

The typical cycle time of an EtherNet/IP network is 10 ms, which means it is not suitable for "hard" realtime applications ( $< 1$  ms), for example, for controlling servo motors. A protocol extension is available for EtherNet/IP for this purpose in the form of CIPSync or MotionSync. Normal twisted pair cables or fiber optic cables are used as a transmission medium.



Optimized installation  
and use for increased  
efficiency

## General Technical Data

### Transmission medium

- 4 or 8-wire (2 or 4-pair) shielded cable as per ISO/IEC 11801 Edition 2.0, ANSI/TIA/EIA-568-B.2 Annex N, Category 5 (minimum)
- Optical fiber
- Hybrid cable for transmitting data and energy

### Network topology

- Line structure or structured cabling using switches
- Implemented DLR (Device Level Ring Protocol) allows uninterruptible operation

### Number of devices

- Arbitrary, depends on network structure

### Reliable transmission rates and segment lengths

- Max. 100 Mbit/s (Fast Ethernet)

### Configuration of devices

Configuration of the individual devices is performed on the basis of EDS files (Electronic Data Sheet), provided by the manufacturer for each slave. The EDS files for Lumberg Automation™ bus modules can be downloaded at [www.lumberg-automation.com/downloads](http://www.lumberg-automation.com/downloads).

### Addressing

Addressing is performed on the basis of three rotary switches, which are used to set the last octet of the IP address. Addressing can alternatively be performed by means of a BOOTP server or DHCP server.











## Matrix EtherNet/IP

Function	Slots Bus Type		Slots I/O Type		Slots Power Type		
	M12	M23	M8	M12	M12	M23	7/8"
<b>EtherNet/IP</b>							
<b>LioN-R</b>							
16 Digital IN	✓	–	–	✓	–	–	✓
16 Digital OUT (1.6 A)	✓	–	–	✓	–	–	✓
8 Digital IN/8 Digital OUT (1.6 A)	✓	–	–	✓	–	–	✓
<b>LioN-M</b>							
16 Digital IN	✓	–	–	✓	–	–	✓
16 Digital IN/OUT (1.6 A)	✓	–	–	✓	–	–	✓
<b>Accessories EtherNet/IP</b>							
Cord sets, single-ended	✓	–	–	✓	–	–	✓
Cord sets, double-ended	✓	–	–	✓	–	–	✓
Field attachable connectors	✓	–	–	✓	–	–	✓
T-connectors	✓	–	–	✓	–	–	✓



## EtherNet/IP – Digital Inputs

### Technical Information

Product Description		
Type	0980 ESL 811-EIP 16DI-M12-R	0980 ESL 711
	<div><div></div></div>	<div><div></div></div>
Description	LioN-R EtherNet/IP device with 16 digital input channels, rotary switches for addressing, M12 LAN connection, 4-poles, D-coded, 7/8" power supply, 4-poles	LioN-M EtherNet/IP device with 16 digital input channels, rotary switches for addressing, M12 LAN connection, 4-poles, D-coded, 7/8" power supply, 4-poles
Technical Data		
Protection Class	IP67	
Environmental Temperature	-10°C to +60°C	
Weight	620 g	380 g
Bus System		
ID Number	0x07	–
EDS File	EDS-V3.9-LumbergAutomation-0980ESL811-20130320.eds	Lion-M_EDS_0980ESL711_Rev_V1_2.eds
Transmission Rate	10/100 Mbit/s	
Address Range	0 to 255	–
System/Sensors Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Power Consumption	typ. 90 mA	
Input Power Supply		
Voltage Range	19 to 30 V DC	
Sensor Current	200 mA	200 mA (at T <sub>amp</sub> +30°C)
Indicator	LED green	
Inputs		
Rated Input Current	24 V DC	
Number of Digital Channels	16	max. 16
Status Indicator	LED white per channel + yellow	LED yellow per channel
Diagnostic Indicator	LED red per port	LED red per socket
Included in Delivery		
M12 Dust Covers	4 pieces	
Attachable Labels	10 pieces	

### Bit Assignment

Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
Byte 1	8B	8A	7B	7A	6B	6A	5B	5A

### Diagnostic Indication 0980 ESL 711


LED	Indicator	Condition
1...8 A	Yellow	Channel status
1...8 DIA A	Red	Periphery error
1...8 B	Yellow	Channel status
1...8 DIA B	Red	Periphery error
P1 Lnk/Act	Green Yellow blinking	Connection to an Ethernet device I/O device exchanging data
P2 Lnk/Act	Green Yellow blinking	Connection to an Ethernet device I/O device exchanging data
MS (Module status)	Green Green blinking Red/green blinking Red blinking Off	Device is ready for operating Wrong configuration Self test is running Firmware update Device is off
NS (Network status)	Green Green blinking Red Red blinking Off	Connection to master is available IP address exists, but no connection to the master IP address is already being used by another device At least one connection has timed out Device is off
Us	Green Off	Sensor power supply applied Sensor power supply missing
U <sub>L</sub>	Green Off	Actuator power supply applied Actuator power supply missing

**Diagnostic Indication 0980 ESL 811-EIP**


LED	Indicator	Condition
1...8 A	Yellow	Channel status
1...8 DIA A	Red	Periphery error
1...8 B	White	Channel status
1...8 DIA B	Red	Periphery error
P1 Lnk/Act	Green Yellow blinking Off	Connection to an Ethernet device I/O device exchanging data No connection to another device
P2 Lnk/Act	Green Yellow blinking Off	Connection to an Ethernet device I/O device exchanging data No connection to any other device
MS (Module status)	Green Green blinking Red/green blinking Red blinking Off	Device is ready for operating Wrong configuration Self test is running Firmware update IP address is available
NS (Network status)	Green blinking Green Red blinking Red Red/green blinking Off	IP address is available Connection to master is available At least one connection has timed out IP address is already being used by another device Self test is running Device is switched off/device has no IP address
Us	Green Red	Voltage 19 V<= US<=30 V Voltage US<19 V or US>30 V
UL	Green Red	Voltage 19 V<= UL<=30 V Voltage UL<19 V or UL>30 V

**Pin Assignment**

LAN Connection M12, D-coded	Power Supply 7/8"	In-/Output M12
<p>1 = TD+ 2 = RD+ 3 = TD- 4 = RD- Housing = shielded</p>	<p>1 = +24 V Actuators 2 = +24 V Logic/Sensors 3 = GND (0 V) 4 = GND (0 V) Actuators Housing = FE</p>	<p>1 = +24 V 2 = IN/OUT B 3 = GND (0 V) 4 = IN/OUT A 5 = Earth/FE Housing = FE</p>

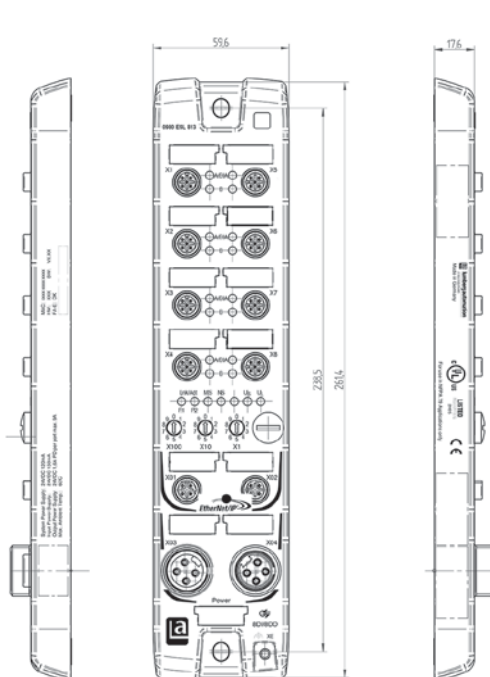



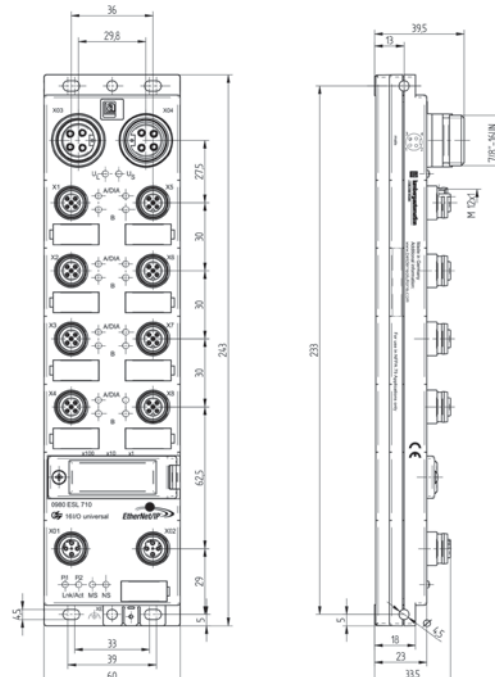







0980 ESL 811-EIP



0980 ESL 711

## EtherNet/IP – Digital Outputs and Digital In- and Outputs

### Technical Information

Product Description		
Type	0980 ESL 812-EIP 16DO-M12-R	0980 ESL 813-EIP 8DI/8DO-M12-R
	<div><div><div>CSA</div><div>UL</div><div></div><div></div><div></div><div></div></div></div>	<div><div><div>CSA</div><div>UL</div><div></div><div></div><div></div><div></div></div></div>
Description	LioN-R EtherNet/IP device, 16 digital output channels with galvanic isolation, rotary switches for addressing, M12 LAN connection, 4-poles, D-coded, 7/8" power supply, 4-poles	LioN-R EtherNet/IP device, 8 digital input and 8 output channels with galvanic isolation, rotary switches for addressing, M12 LAN connection, 4-poles, D-coded, 7/8" power supply, 4-poles
Technical Data		
Protection Class	IP67	
Environmental Temperature	-10°C to +60°C	
Weight	620 g	
Bus System		
ID Number	0x07	
EDS File	EDS-V3.9-LumbergAutomation-0980ESL812-20130320.eds	EDS-V3.0-LumbergAutomation-0980ESL813-20130320.eds
Transmission Rate	10/100 Mbit/s	
Address Range	0 to 255	
Inputs		
Rated Input Current	–	24 V DC
Number of Digital Channels	–	8
Status Indicator	–	LED white per channel + yellow
Diagnostic Indicator	–	LED red per port
Output Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Reverse Polarity Protection	yes/antiparallel diode	
Indicator	LED white	
Outputs		
Rated Output Current	1.6 A per channel	
Short Circuit-proof	yes	
Max. Current Carrying Capacity	9 A per module	
Number of Digital Channels	16	8
Status Indicator	LED white per channel + yellow	
Diagnostic Indicator	LED red per port	
Included in Delivery		
M12 Dust Covers	4 pieces	
Attachable Labels	10 pieces	

### Bit Assignment




Bit	7	6	5	4	3	2	1	0
M12 Output 16DO								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
Byte 1	8B	8A	7B	7A	6B	6A	5B	5A
M12 Input 8DI								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
M12 Output 8DO								
Byte 0	8B	8A	7B	7A	6B	6A	5B	5A




**Diagnostic Indication**

LED	Indicator	Condition
1...8 A	Yellow	Channel status
1...8 DIA A	Red	Periphery error
1...8 B	White	Channel status
1...8 DIA B	Red	Periphery error
P1 Lnk/Act	Green Yellow blinking Off	Connection to an Ethernet device I/O device exchanging data No connection to another device
P2 Lnk/Act	Green Yellow blinking Off	Connection to an Ethernet device I/O device exchanging data No connection to another device
MS (Module status)	Green Green blinking Red/green blinking Red blinking Off	Device is ready for operating Wrong configuration Self test is running Firmware update IP address is available
NS (Network status)	Green blinking Green Red blinking Red Red/green blinking Off	IP address is available Connection to master is available At least one connection has timed out IP address is already being used by another device Self test is running Device is switched off/device has no IP address
Us	Green Red	Voltage $19\text{ V} \leq \text{US} \leq 30\text{ V}$ Voltage $\text{US} < 19\text{ V}$ oder $\text{US} > 30\text{ V}$
UL	Green Red	Voltage $19\text{ V} \leq \text{UL} \leq 30\text{ V}$ Voltage $\text{UL} < 19\text{ V}$ or $\text{UL} > 30\text{ V}$

**Pin Assignment**

LAN Connection M12, D-coded	Power Supply 7/8"	In-/Output M12
 <p>1 = TD+ 2 = RD+ 3 = TD- 4 = RD- Housing = shielded</p>	 <p>1 = +24 V Actuators 2 = +24 V Logic/Sensors 3 = GND (0 V) 4 = GND (0 V) Actuators Housing = FE</p>	 <p>1 = +24 V 2 = IN/OUT B 3 = GND (0 V) 4 = IN/OUT A 5 = Earth Housing = FE</p>

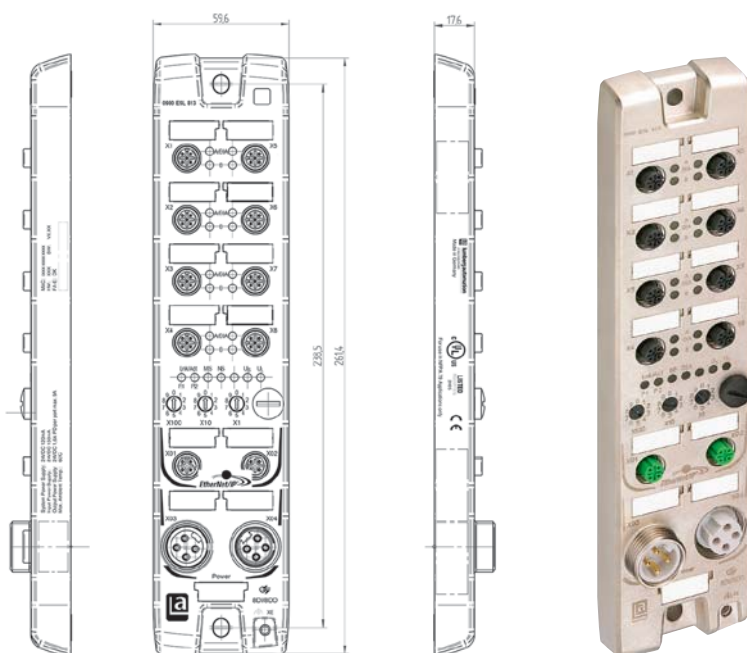

0980 ESL 812/813-EIP

## EtherNet/IP – Universal

### Technical Information

Product Description	
Type	0980 ESL 710
	   
Description	LioN-M EtherNet/IP device with 16 digital I/O channels, channels can be used universally as inputs or outputs, rotary switches for addressing, M12 LAN connection, 4-poles, D-coded, 7/8" power supply, 4-poles
Technical Data	
Protection Class	IP67
Environmental Temperature	-10°C to +60°C
Weight	380 g
Bus System	
EDS File	Lion-M_EDS_0980ESL710_Rev_V1_2.eds
Transmission Rate	10/100 Mbit/s
System/Sensors Power Supply	
Rated Voltage	24 V DC
Voltage Range	19 to 30 V DC
Power Consumption	typ. 90 mA
Input Power Supply	
Voltage Range	19 to 30 V DC
Sensor Current	200 mA (at T <sub>amp</sub> +30°C)
Indicator	LED green
Inputs	
Rated Input Current	24 V DC
Number of Digital Channels	max. 16
Status Indicator	LED yellow per channel
Diagnostic Indicator	LED red per socket
Output Power Supply	
Rated Voltage	24 V DC
Voltage Range	19 to 30 V DC
Reverse Polarity Protection	yes/antiparallel diode
Indicator	LED green
Outputs	
Rated Output Current	1.6 A per channel
Short Circuit-proof	yes
Max. Current Carrying Capacity	9 A (12 A) per module
Number of Digital Channels	max. 16
Status Indicator	LED yellow per channel
Diagnostic Indicator	LED red per socket
Included in Delivery	
M12 Dust Covers	4 pieces
Attachable Labels	10 pieces




### Bit Assignment


Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
Byte 1	8B	8A	7B	7A	6B	6A	5B	5A
M12 Output								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
Byte 1	8B	8A	7B	7A	6B	6A	5B	5A

**Diagnostic Indication**

LED	Indicator	Condition
1...8 A	Yellow	Channel status
1...8 DIA A	Red	Periphery error
1...8 B	Yellow	Channel status
1...8 DIA B	Red	Periphery error
P1 Lnk/Act	Green Yellow blinking	Connection to an Ethernet device I/O device exchanging data
P2 Lnk/Act	Green Yellow blinking	Connection to an Ethernet device I/O device exchanging data
MS (Module status)	Green Green blinking Red/green blinking Red blinking Off	Device is ready for operating Wrong configuration Self test is running Firmware update Device is off
NS (Network status)	Green Green blinking Red Red blinking Off	Connection to master is available IP address exists, but no connection to the master IP address is used by a different device Connection has timed out Device is off
Us	Green Off	Sensor power supply applied Sensor power supply missing
UL	Green Off	Actuator power supply applied Actuator power supply missing

**Pin Assignment**

LAN Connection M12, D-coded	Power Supply 7/8"	In-/Output M12
 <p>1 = TD+ 2 = RD+ 3 = TD- 4 = RD-</p> <p>Housing = shielded</p>	 <p>1 = +24 V Actuators 2 = +24 V Logic/Sensors 3 = GND (0 V) Logic/Sensors 4 = GND (0 V) Actuators</p> <p>Housing = FE</p>	 <p>1 = +24 V 2 = IN/OUT B 3 = GND (0 V) 4 = IN/OUT A 5 = Earth</p> <p>Housing = FE</p>

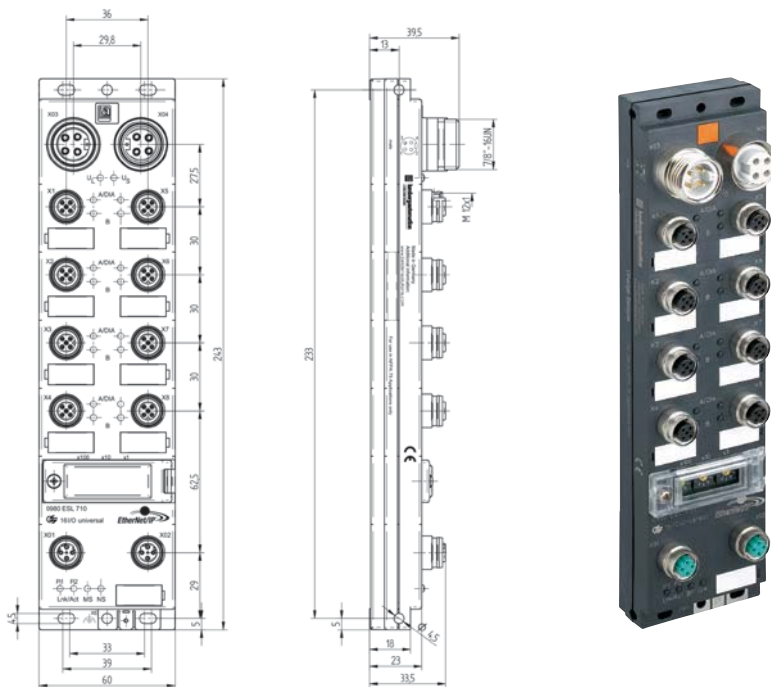

0980 ESL 710





# I/O Modules Active – Stand-Alone: PROFIBUS



Be certain. Belden.

## PROFIBUS – Process Field Bus



PROFIBUS (Process Field Bus) is an open fieldbus standard in compliance with the international standard EN 50170. To meet various demands in automation technology PROFIBUS is subdivided into three different profiles:

- PROFIBUS-FMS (Field Message Specification):  
Protocol for communication between different control systems (PLCs or PCs)
- PROFIBUS-PA (Process Automation):  
Intrinsically safe bus system for process technology
- PROFIBUS-DP (Decentral Periphery):  
Transmission protocol for the communication between control system and decentral input/output assemblies

### The I/O Modules from Lumberg Automation™ Support the PROFIBUS-DP Protocol

Thanks to support from most leading control unit manufacturers, and to vendor-independent enhanced development by PNO (Profibus User Organization), PROFIBUS will also play an important role in field bus systems in the future.



Reliable PROFIBUS  
solutions for industrial  
automation technology  
worldwide

## General Technical Data

### Transmission medium

- 2-wire, shielded cable (according to RS485)
- Fiber optic cable
- Hybrid cable for the transmission of data and supply voltage

### Network topology

Line structure with active bus termination (resistance network) at both ends of a segment.

### Number of devices

- 32 per segment
- Repeaters can be used to expand the bus to up 126 participants

### Reliable transmission rates and segment lengths

This depends on the transmission rate (Baud rate) the segment lengths and the number of repeaters which can be switched serially.

Bit/s	9.6 k	19.2 k	45.45 k	93.75 k	187.5 k	500.0 k	1.5 M	3, 6, 12 M
Length (m)	1.200	1.200	1.200	1.200	1.000	400	200	100
Max. number of repeaters	7	7	7	7	7	7	4	4

### Configuration of devices

The individual participants are projected by means of the GSD files (configuration file) which are provided by the manufacturer for each slave. The GSD files for the Lumberg Automation™ bus modules can be downloaded from [www.lumberg-automation.com/downloads](http://www.lumberg-automation.com/downloads).

### Addressing

An individual address is allocated to each participant via rotary address switches (address 1...99) or addressing tools (address 1...126).















## Matrix PROFIBUS

Function	Slots Bus Type		Slots I/O Type		Slots Power Type		
	M12	M23	M8	M12	M12	M23	7/8"
<b>PROFIBUS</b>							
<b>LioN-R</b>							
16 Digital IN	✓	–	–	✓	–	–	✓
16 Digital OUT (1.6 A)	✓	–	–	✓	–	–	✓
8 Digital IN/8 Digital OUT (1.6 A)	✓	–	–	✓	–	–	✓
<b>LioN-M</b>							
16 Digital IN	✓	–	–	✓	–	–	✓
16 Digital IN/OUT (1.6 A)	✓	–	–	✓	–	–	✓
<b>LioN-S</b>							
8 Digital IN	✓	–	✓	–	✓	–	–
8 Digital IN/OUT (0.5 A)	✓	–	✓	–	✓	–	–
<b>LioN-Classic</b>							
8 Digital IN	✓	–	–	✓	–	✓	–
16 Digital IN	✓	–	–	✓	–	✓	–
8 Digital OUT (2 A)	✓	–	–	✓	–	✓	–
16 Digital OUT (0.5 A)	✓	–	–	✓	–	✓	–
8 Digital IN/4 Digital OUT (2 A)	✓	–	–	✓	–	✓	–
8 Digital IN/8 Digital OUT (0.5 A)	✓	–	–	✓	–	✓	–
<b>Accessories PROFIBUS</b>							
Cord sets, single-ended	✓	–	✓	✓	✓	✓	✓
Cord sets, double-ended	✓	–	✓	✓	✓	✓	✓
Field attachable connectors	✓	–	✓	✓	✓	✓	✓
T-connectors	✓	–	✓	✓	✓	✓	✓

## PROFIBUS – Digital Inputs

### Technical Information

Product Description		
Type	0970 PSL 111	0970 PSL 114
	<div></div>	<div></div>
Description	LioN-Classic PROFIBUS-DP device with 16 digital inputs to connect standard sensors, combined FIXCON®/M12 socket, rotary switches for addressing, M12 bus connection, 5-poles, B-coded, M23 power supply, 6-poles	LioN-Classic PROFIBUS-DP device with encapsulated housing, with 8 digital inputs to connect standard sensors, combined FIXCON®/M12 socket, rotary switches for addressing, M12 bus connection, 5-poles, B-coded, M23 power supply, 6-poles
Technical Data		
Protection Class	IP67	
Environmental Temperature	0°C to +60°C	
Weight	535 g	
Bus System		
ID Number	044E hex	044F hex
GSD File	Lum_044E.gsd	Lum_044F.gsd
Transmission Rate	max. 12 MB	
Address Range	1 to 125	
System/Sensors Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Power Consumption	90 mA	60 mA
Input Power Supply		
Voltage Range	min. (U <sub>System</sub> – 1.5 V)	
Sensor Current	100 mA (at T <sub>amp</sub> +30°C)	max. 800 mA
Indicator	LED green per channel	
Inputs		
Rated Input Current	24 V DC	
Number of Digital Channels	16	8
Status Indicator	LED green per channel	
Diagnostic Indicator	LED red per channel	
Included in Delivery		
M12 Dust Covers	2 pieces	
Attachable Labels	10 pieces	

#### Bit Assignment 0970 PSL 111

Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	8A	7A	6A	5A	4A	3A	2A	1A
Byte 1	8B	7B	6B	5B	4B	3B	2B	1B
Diagnostic								
DIA-Byte	–	–	–	OVL	–	–	–	–

OVL: Overload status

#### Bit Assignment 0970 PSL 114

Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	8	7	6	5	4	3	2	1
Diagnostic								
DIA-Byte	–	–	–	OVL	–	–	–	–

#### Diagnostic Indication

LED	Indicator	Condition
1...8 A/B (only 0970 PSL 111)	Yellow	Channel status
1...8 (only 0970 PSL 114)	Yellow	Channel status
Us	Green	Sensor supply active
UL	Green	Module electronic supply active
BF	Red	Bus error
DIA	Red	Module diagnostics (sensor short circuit/sensor overload)



## PROFIBUS – Digital Inputs

### Technical Information

Product Description		
Type	0970 PSL 651	0970 PSL 701
	<div></div>	<div></div>
Description	LioN-S PROFIBUS-DP device with 8 digital inputs to connect standard sensors, M8 socket, 3-poles, rotary switches for addressing, M12 bus connection, 5-poles, B-coded, M12 power supply, 5-poles	LioN-M PROFIBUS-DP device with 16 digital inputs to connect standard sensors, combined FIXCON®/M12 socket, rotary switches for addressing, M12 bus connection, 5-poles, B-coded, 7/8" power supply, 5-poles
Technical Data		
Protection Class	IP67	
Environmental Temperature	-10°C to +60°C	
Weight	200 g	380 g
Bus System		
ID Number	09C9 hex	09CA hex
GSD File	Lum_09C9.gsd	Lum_09CA.gsd
Transmission Rate	max. 12 MB	
Address Range	1 to 125	
System/Sensors Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Power Consumption	90 mA	120 mA
Input Power Supply		
Voltage Range	min. (U <sub>System</sub> – 1.5 V)	
Sensor Current	100 mA (at T <sub>amp</sub> +30°C)	
Indicator	LED green per channel	
Inputs		
Rated Input Current	24 V DC	
Number of Digital Channels	8	16
Status Indicator	LED green per channel	
Diagnostic Indicator	LED red per channel	
Included in Delivery		
M12 Dust Covers	2 pieces	4 pieces
Attachable Labels	10 pieces	

#### Bit Assignment 0970 PSL 651

Bit	7	6	5	4	3	2	1	0
M8 Input								
Byte 0	8	7	6	5	4	3	2	1

#### Bit Assignment 0970 PSL 701

Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
Byte 1	8B	8A	7B	7A	6B	6A	5B	5A

**Diagnostic Indication**

LED	Indicator	Condition
1...8 (only 0970 PSL 651)	Yellow Red	Channel status Periphery error
1...8 A/B (only 0970 PSL 701)	Yellow	Channel status
1...8 A/B DIA (only 0970 PSL 701)	Red	Periphery error
Us	Green	Sensor/system power supply
BF	Red	Bus error
DIA	Red	Common indication for periphery faults


**Pin Assignment 0970 PSL 651**

Bus Connection M12	Power Supply M12	Input M8

**Pin Assignment 0970 PSL 701**





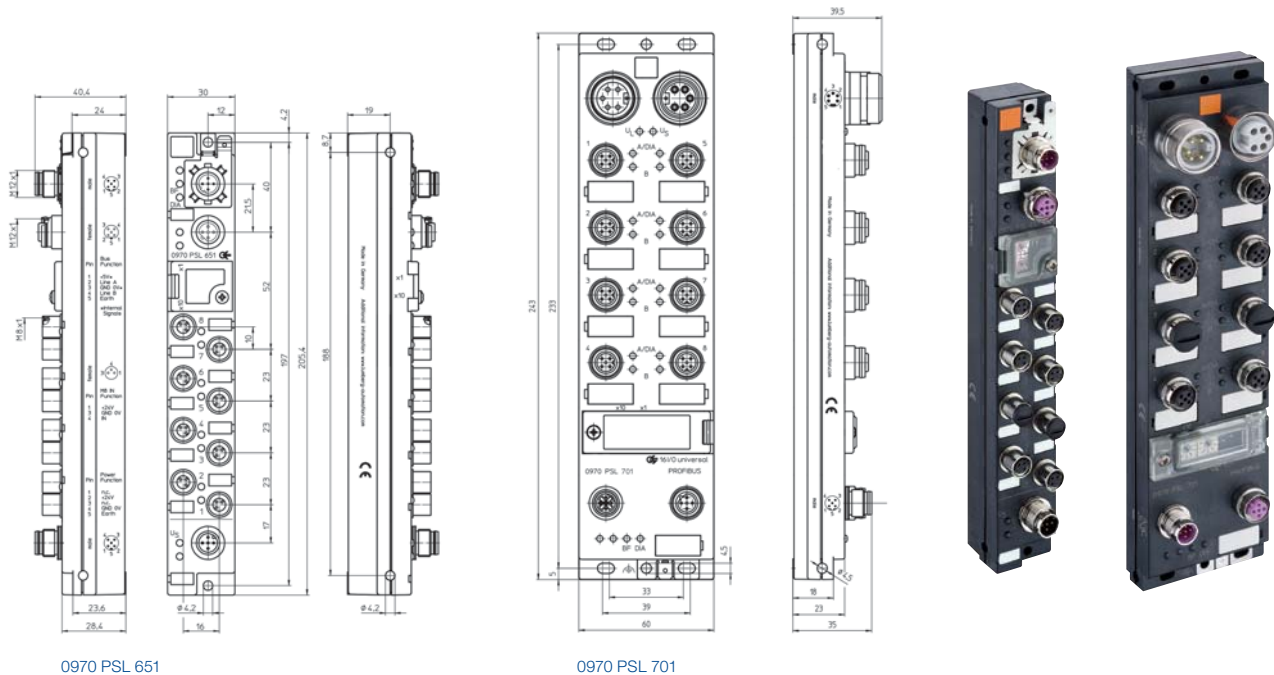



Bus Connection M12	Power Supply 7/8"	Input M12

1 = Internal signals: galvanically separated to sensors  
2 = System/sensors



## PROFIBUS – Digital Inputs

### Technical Information

Product Description	
Type	0970 PSL 811-PB-DP 16DI-M12-R
	      
	
Description	LioN-R PROFIBUS-DP device with 16 digital inputs to connect standard sensors, 8 x M12 socket, A-coded, 5-poles, rotary switches for addressing, PROFIBUS connection 2 x M12, 5-poles, B-coded, power supply 2 x 7/8", 5-poles
Technical Data	
Protection Class	IP67
Environmental Temperature	-10°C to +60°C
Weight	615 g
Housing Material	Metal (die-cast zinc)
Bus System	
ID Number	0E94
GSD File	LUM_0E94.gsd
Transmission Rate	max. 12 MBaud
Address Range	1 to 125 dez (default address: 126 dez)
System/Sensors Power Supply (Us)	
Rated Voltage	24 V DC
Voltage Range	18 to 30 V DC
Power Consumption	typ. 60 mA
Input Power Supply	
Voltage Range	min. (Us – 1.5 V)
Sensor Current per Socket	200 mA (at T <sub>amp</sub> +30°C)
Indicator	LED green/red
Inputs (Type 3 acc. to IEC 61131-2)	
Rated Input Current	24 V DC
Number of Digital Channels	16
Status Indicator	LED yellow channel A/LED white channel B
Diagnostic Indicator	LED red per port
Included in Delivery	
M12 Dust Covers	4 pieces
Attachable Labels	10 pieces

### Bit Assignment






Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
Byte 1	8B	8A	7B	7A	6B	6A	5B	5A




**Diagnostic Indication**

LED	Indicator	Condition
Us	Green	Logic/sensor power supply OK
Us	Red	Logic/sensor power supply outside limits
UL	Green	Actuator power supply OK
UL	Red	Actuator power supply outside limits
1...8 A	Yellow	Channel status
1...8 DIA A	Red	Periphery error
1...8 B	White	Channel status
1...8 DIA B	Red	Periphery error
ACT	Yellow	PROFIBUS communication active
BF	Red	Bus error, no data exchange with controller
BF	Green	Data exchange with controller
DIA	Green	No peripheral error message available
DIA	Red	Peripheral error message to controller

**Pin Assignment**

Bus Connection M12, B-coded	Power Supply 7/8"	Input M12, A-coded
<p><b>IN</b> M12 male connector, 5-poles</p>  <p><b>OUT</b> M12 socket, 5-poles</p>  <p>1 = VP (+5 V)* 2 = Line A 3 = DGND (0 V)* 4 = Line B 5 = n.c.</p> <p>Housing = shielded</p>	<p><b>IN</b> 7/8" male connector, 5-poles</p>  <p><b>OUT</b> 7/8" socket, 5-poles</p>  <p>1 = GND Actuators UL 2 = GND System/ Sensors US 3 = Earth/FE 4 = +24 V System/ Sensors US 5 = +24 V Actuators UL</p>	<p><b>IN</b></p>  <p>1 = +24 V DC 2 = IN B 3 = GND (0 V) 4 = IN A 5 = Earth/FE</p> <p>Housing = FE</p>



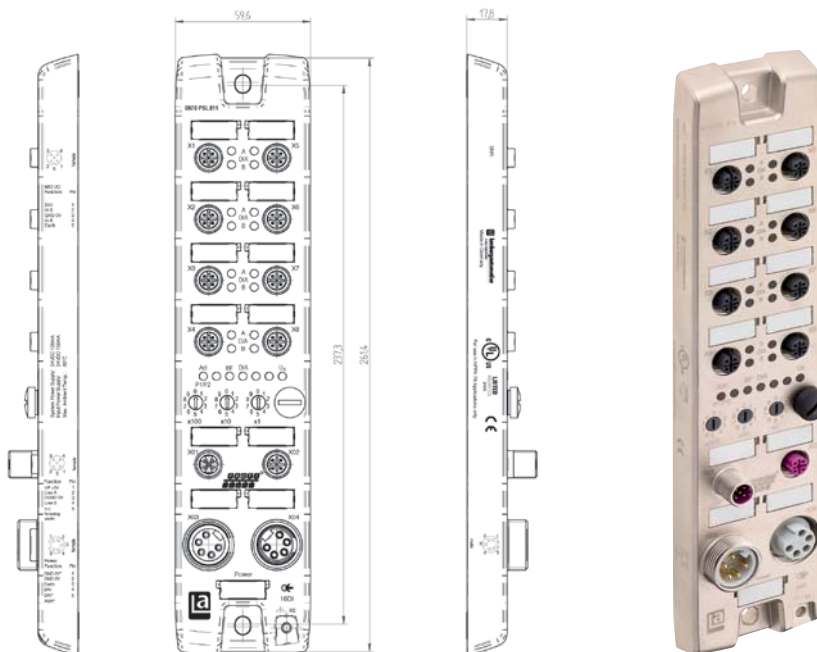







\* Signals isolated galvanically from sensors/actuators



0970 PSL 811-PB-DP 16DI-M12-R

## PROFIBUS – Digital Outputs

### Technical Information

Product Description		
Type	0970 PSL 112	0970 PSL 124
	<div></div> <div></div>	<div></div> <div></div>
Description	LioN-Classic PROFIBUS-DP device with 8 digital outputs to connect standard actuators, combined FIXCON®/M12 socket, rotary switches for addressing, M12 bus connection, 5-poles, B-coded, M23 power supply, 6-poles	LioN-Classic PROFIBUS-DP device with 16 digital outputs to connect standard actuators, combined FIXCON®/M12 socket, rotary switches for addressing, M12 bus connection, 5-poles, B-coded, M23 power supply, 6-poles
Technical Data		
Protection Class	IP67	
Environmental Temperature	-10°C to +60°C	
Weight	535 g	200 g
Bus System		
ID Number	044D hex	06EA.hex
GSD File	Lum_044D.gsd	Lum_06EA.gsd
Transmission Rate	max. 12 MB	
Address Range	1 to 125	
System/Sensors Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Power Consumption	60 mA	
Output Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Reverse Polarity Protection	yes	
Indicator	LED green	
Outputs		
Rated Output Current	2 A per channel	0.7 A per channel
Short Circuit-proof	yes	
Max. Current Carrying Capacity	15 A per module	11.2 A per module
Number of Digital Channels	8	16
Status Indicator	LED yellow per channel	
Diagnostic Indicator	LED red per channel	
Included in Delivery		
M12 Dust Covers	2 pieces	
Attachable Labels	10 pieces	

#### Bit Assignment 0970 PSL 112

Bit	7	6	5	4	3	2	1	0
M12 Output								
Byte 0	8	7	6	5	4	3	2	1
Diagnostic								
DIA-Byte	–	UVA	ASC	–	–	–	–	–

UVA: Undervoltage actuator  
ASC: Actuator short-circuit




#### Bit Assignment 0970 PSL 124

Bit	7	6	5	4	3	2	1	0
M12 Output								
Byte 0	8A	7A	6A	5A	4A	3A	2A	1A
Byte 1	8B	7B	6B	5B	4B	3B	2B	1B
Diagnostic								
DIA-Byte	–	UVA	ASC	–	–	–	–	–




**Diagnostic Indication**

LED	Indicator	Condition
1...8 A (only 0970 PSL 112)	Yellow	Channel status
1...8 (only 0970 PSL 112)	Red	Actuator short circuit
1...8 A/B (only 0970 PSL 124)	Yellow Red	Channel status Actuator short circuit
Us	Green	Actuator supply active
UL	Green	Module electronic supply active
BF	Red	Bus error
DIA	Red	Module diagnostics (actuator low voltage/actuator short-circuit/actuator overload)


**Pin Assignment 0970 PSL 112**

Bus Connection M12	Power Supply M23	Output M12
 1 = +5 V <sup>1</sup> 2 = Line A 3 = GND (0 V) <sup>1</sup> 4 = Line B 5 = Earth	 1 = Earth 2 = +24 V <sup>2</sup> 3 = GND (0 V) <sup>2</sup> 4 = +24 V <sup>3</sup> 5 = GND (0 V) <sup>3</sup> 6 = n.c.	 1 = n.c. 2 = n.c. 3 = GND (0 V) 4 = OUT 5 = Earth


**Pin Assignment 0970 PSL 124**

Bus Connection M12	Power Supply M23	Output M12
 1 = +5 V <sup>1</sup> 2 = Line A 3 = GND (0 V) <sup>1</sup> 4 = Line B 5 = Earth	 1 = Earth 2 = +24 V <sup>2</sup> 3 = GND (0 V) <sup>2</sup> 4 = +24 V <sup>3</sup> 5 = GND (0 V) <sup>3</sup> 6 = n.c.	 1 = n.c. 2 = OUT B 3 = GND (0 V) 4 = OUT A 5 = Earth

1 = Internal signals • 2 = Actuators • 3 = System

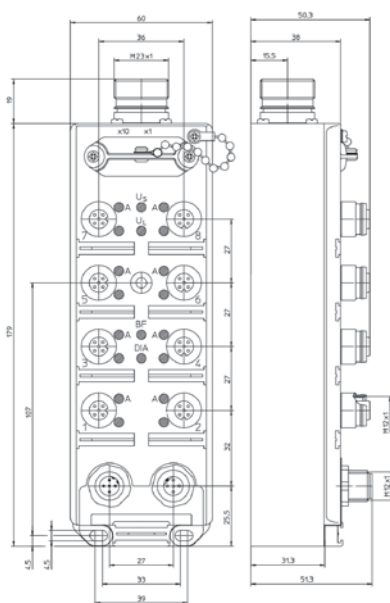

0970 PSL 112

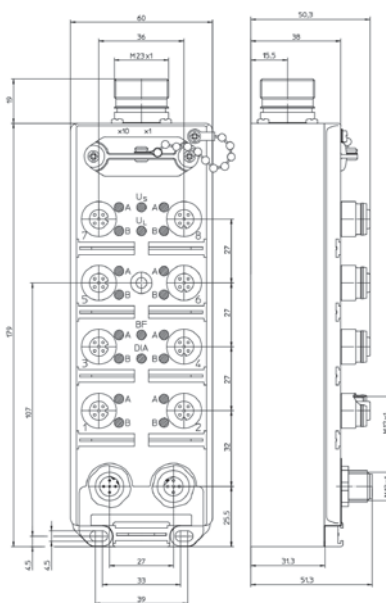









0970 PSL 124



## PROFIBUS – Digital Outputs

### Technical Information

Product Description	
Type	0970 PSL 812-PB-DP 16DO-M12-R
	      
	
Description	LioN-R PROFIBUS-DP device 16 digital output channels with galvanic isolation to connect standard actuators, 8 x M12 socket, A-coded, 5-poles, rotary switches for addressing, PROFIBUS connection 2 x M12, 5-poles, B-coded, power supply 2 x 7/8", 5-poles
Technical Data	
Protection Class	IP67
Environmental Temperature	-10°C to +60°C
Weight	615 g
Housing Material	Metal (die-cast zinc)
Bus System	
ID Number	0E94
GSD File	LUM_0E94.gsd
Transmission Rate	max. 12 MBaud
Address Range	1 to 125 dez (default address: 126 dez)
System-Stromversorgung	
Rated Voltage	24 V DC
Voltage Range	18 to 30 V DC
Power Consumption	typ. 60 mA
Output Power Supply	
Rated Voltage	24 V DC
Voltage Range	18 to 30 V DC
Reverse Polarity Protection	yes/permanent inverse polarity protection
Indicator	LED green
Outputs	
Rated Output Current	1.6 A per channel
Short Circuit-proof	yes
Max. Strombelastbarkeit	9 A per module
Number of Digital Channels	16
Channel Type N.O.	p-switching
Status Indicator	LED yellow channel A/LED white channel B
Diagnostic Indicator	LED red per port
Included in Delivery	
M12 Dust Covers	4 pieces
Attachable Labels	10 pieces






### Bit Assignment

Bit	7	6	5	4	3	2	1	0
M12 Output								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
Byte 1	8B	8A	7B	7A	6B	6A	5B	5A


**Diagnostic Indication**

LED	Indicator	Condition
Us	Green	Logic/sensor power supply OK
Us	Red	Logic/sensor power supply outside limits
UL	Green	Actuator power supply OK
UL	Red	Actuator power supply outside limits
1...8 A	Yellow	Channel status
1...8 DIA A	Red	Periphery error
1...8 B	White	Channel status
1...8 DIA B	Red	Periphery error
ACT	Yellow	PROFIBUS communication active
BF	Red	Bus error, no data exchange with controller
BF	Green	Data exchange with controller
DIA	Green	No peripheral error message available
DIA	Red	Peripheral error message to controller

**Pin Assignment**

Bus Connection M12, B-coded	Power Supply 7/8"	Output M12, A-coded
 <b>IN</b> M12 male connector, 5-poles   <b>OUT</b> M12 socket, 5-poles 1 = VP (+5 V)* 2 = Line A 3 = DGND (0 V)* 4 = Line B 5 = n.c. Housing = shielded	 <b>IN</b> 7/8" male connector, 5-poles   <b>OUT</b> 7/8" socket, 5-poles 1 = GND Actuators UL 2 = GND System/ Sensors US 3 = Earth/FE 4 = +24 V System/ Sensors US 5 = +24 V Actuators UL	 <b>OUT</b> 1 = n. c. 2 = OUT B 3 = GND 4 = OUT A 5 = Earth/FE Housing = FE



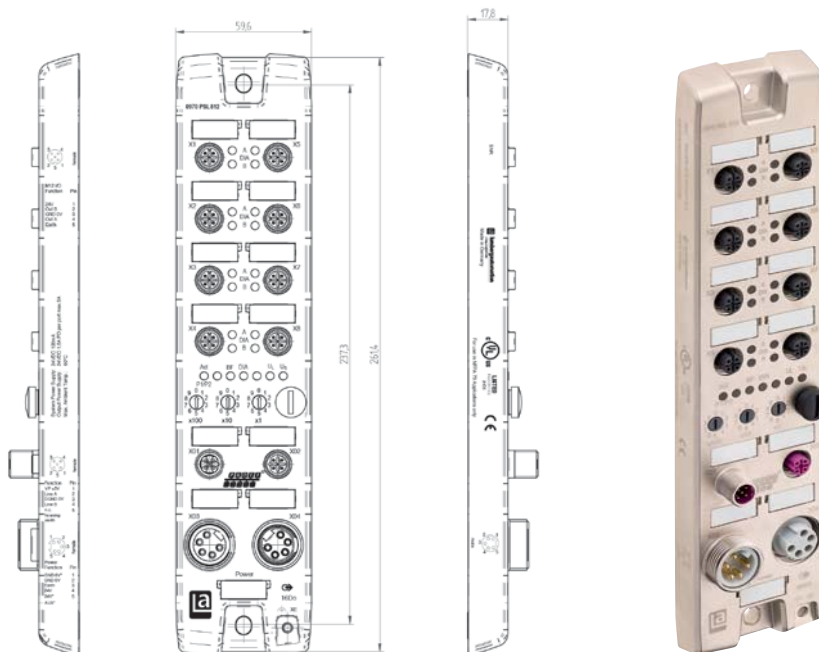







\* Signals isolated galvanically from sensors/actuators



0970 PSL 812-PB-DP 16DO-M12-R

## PROFIBUS – Digital In- and Outputs

### Technical Information

Product Description		
Type	0970 PSL 113	0970 PSL 123
	    	    
Description	LioN-Classic PROFIBUS-DP device with 8 digital inputs to connect standard sensors and 4 digital outputs to connect standard actuators, combined FIXCON®/M12 socket, rotary switches for addressing, M12 bus connection, 5-poles, B-coded, M23 power supply, 6-poles	
Technical Data		
Protection Class	IP67	
Environmental Temperature	0°C to +60°C	
Weight	535 g	
Bus System		
ID Number	0450 hex	06E9 hex
GSD File	Lum_0450.gsd	Lum_06E9.gsd
Transmission Rate	max. 12 MBaud	
Address Range	1 to 126	
System/Sensors Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Power Consumption	60 mA	
Input Power Supply		
Voltage Range	min. (U <sub>system</sub> – 1.5 V)	
Sensor Current	800 mA	
Indicator	LED green	
Inputs		
Rated Input Current	24 V DC	
Number of Digital Channels	8	
Status Indicator	LED yellow per channel	
Diagnostic Indicator	LED red per channel	
Output Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Reverse Polarity Protection	yes	
Indicator	LED green	
Outputs		
Rated Output Current	2 A per channel	0.7 A per channel
Short Circuit-proof	yes	
Max. Current Carrying Capacity	8 A per module	5.6 A per module
Number of Digital Channels	4	8
Status Indicator	LED yellow per channel	
Diagnostic Indicator	LED red per channel	
Included in Delivery		
M12 Dust Covers	2 pieces	
Attachable Labels	10 pieces	

#### Bit Assignment 0970 PSL 113

Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	4B	3B	2B	1B	4A	3A	2A	1A
M12 Output								
Byte 0	–	–	–	–	8	6	4	2
Diagnostic								
DIA-Byte	–	UVA	ASC	OVL	–	–	–	–

UVA: Undervoltage actuator • ASC: Actuator short-circuit  
OVL: Overload status

#### Bit Assignment 0970 PSL 123





Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	8B	6B	4B	2B	8A	6A	4A	2A
M12 Output								
Byte 0	7B	5B	3B	1B	7A	5A	3A	1A
Diagnostic								
DIA-Byte	–	UVA	ASC	OVL	–	–	–	–






### Diagnostic Indication

LED	Indicator	Condition
1, 3, 5, 7 A/B 2, 4, 6, 8 A (only 0970 PSL 113)	Yellow	Channel status
2, 4, 6, 8 (only 0970 PSL 113)	Red	Actuator short circuit
1...8 A/B (only 0970 PSL 123)	Yellow	Channel status
2, 4, 6, 8 A/B (only 0970 PSL 123)	Red	Actuator short circuit
Us	Green	Actuator supply active
UL	Green	Module electronic supply active
BF	Red	Bus error
DIA	Red	Module diagnostics (sensor shortcircuit/sensor overload/ actuator low voltage/actuator short-circuit/actuator overload)


## Pin Assignment 0970 PSL 113

Bus Connection M12	Power Supply M23	In-/Output M12												
<div><p>1 = +5 V <sup>1</sup> 2 = Line A 3 = GND (0 V) <sup>1</sup> 4 = Line B 5 = Earth</p></div> <div><p>3 = GND (0 V) <sup>1</sup> 4 = Line A 5 = Earth</p></div>	<div><p>1 = Earth 2 = +24 V <sup>2</sup> 3 = GND (0 V) <sup>2</sup> 4 = +24 V <sup>3</sup> 5 = GND (0 V) <sup>3</sup> 6 = n.c.</p></div>	<div><table><thead><tr><th>IN</th><th>OUT</th></tr></thead><tbody><tr><td>1 = +24 V</td><td>1 = n.c.</td></tr><tr><td>2 = IN B</td><td>2 = n.c.</td></tr><tr><td>3 = GND (0 V)</td><td>3 = GND (0 V)</td></tr><tr><td>4 = IN A</td><td>4 = OUT</td></tr><tr><td>5 = Earth</td><td>5 = Earth</td></tr></tbody></table></div>	IN	OUT	1 = +24 V	1 = n.c.	2 = IN B	2 = n.c.	3 = GND (0 V)	3 = GND (0 V)	4 = IN A	4 = OUT	5 = Earth	5 = Earth
IN	OUT													
1 = +24 V	1 = n.c.													
2 = IN B	2 = n.c.													
3 = GND (0 V)	3 = GND (0 V)													
4 = IN A	4 = OUT													
5 = Earth	5 = Earth													


## Pin Assignment 0970 PSL 123

Bus Connection M12	Power Supply M23	In-/Output M12												
 <p>1 = +5 V <sup>1</sup> 2 = Line A 3 = GND (0 V) <sup>1</sup> 4 = Line B 5 = Earth</p>	 <p>1 = Earth 2 = +24 V <sup>2</sup> 3 = GND (0 V) <sup>2</sup> 4 = +24 V <sup>3</sup> 5 = GND (0 V) <sup>3</sup> 6 = n.c.</p>	 <table><thead><tr><th>IN</th><th>OUT</th></tr></thead><tbody><tr><td>1 = +24 V</td><td>1 = n.c.</td></tr><tr><td>2 = IN B</td><td>2 = OUT B</td></tr><tr><td>3 = GND (0 V)</td><td>3 = GND (0 V)</td></tr><tr><td>4 = IN A</td><td>4 = OUT A</td></tr><tr><td>5 = Earth</td><td>5 = Earth</td></tr></tbody></table>	IN	OUT	1 = +24 V	1 = n.c.	2 = IN B	2 = OUT B	3 = GND (0 V)	3 = GND (0 V)	4 = IN A	4 = OUT A	5 = Earth	5 = Earth
IN	OUT													
1 = +24 V	1 = n.c.													
2 = IN B	2 = OUT B													
3 = GND (0 V)	3 = GND (0 V)													
4 = IN A	4 = OUT A													
5 = Earth	5 = Earth													

1 = Internal signals • 2 = Actuators • 3 = System

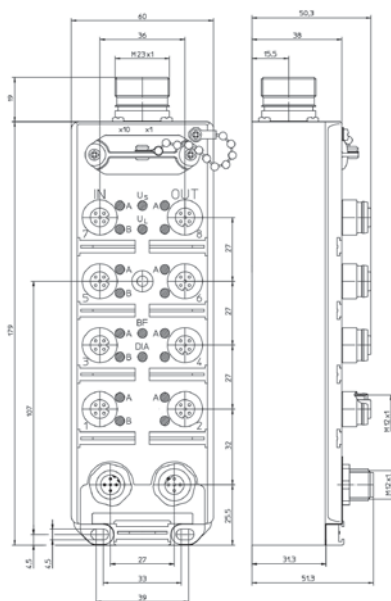

0970 PSL 113

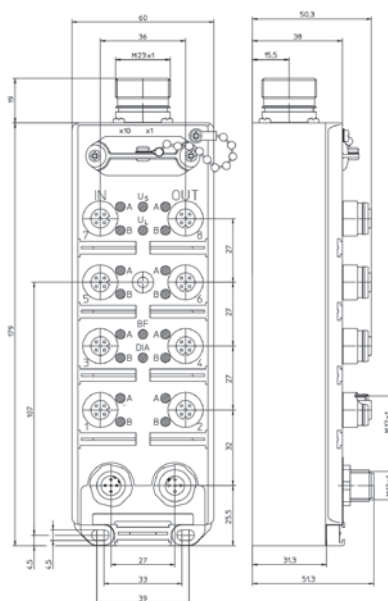

0970 PSL 123



The application of these products in harsh environments should always be checked before use.  
Technical modifications reserved.

## PROFIBUS – Digital In- and Outputs

### Technical Information

Product Description	
Type	0970 PSL 813-PB-DP 8DI8DO-M12-R
	       
Description	LioN-R PROFIBUS-DP device with 8 digital input channels and 8 output channels with galvanic isolation, 8 x M12 socket, A-coded, 5-poles, rotary switches for addressing, PROFIBUS connection 2 x M12, 5-poles, B-coded, power supply 2 x 7/8", 5-poles
Technical Data	
Protection Class	IP67
Environmental Temperature	-10°C to +60°C
Weight	615 g
Housing Material	Metal (die-cast zinc)
Bus System	
ID Number	0E94
GSD File	LUM_0E94.gsd
Transmission Rate	max. 12 MBaud
Address Range	1 to 125 dez (default address: 126 dez)
System/Sensors Power Supply (Us)	
Rated Voltage	24 V DC
Voltage Range	18 to 30 V DC
Power Consumption	typ. 60 mA
Input Power Supply	
Voltage Range	min. (Us – 1.5 V)
Sensor Current per Socket	200 mA (at T <sub>amp</sub> +30°C)
Indicator	LED green/red
Inputs (Type 3 acc. to IEC 61131-2)	
Rated Input Current	24 V DC
Number of Digital Channels	8
Status Indicator	LED white per channel
Diagnostic Indicator	LED red per port
Output Power Supply	
Rated Voltage	24 V DC
Voltage Range	18 to 30 V DC
Reverse Polarity Protection	yes/permanent inverse polarity protection
Indicator	LED green
Outputs	
Rated Output Current	1.6 A per channel
Short Circuit-proof	yes
Max. Current Carrying Capacity	9 A per module
Number of Digital Channels	8
Channel Type N.O.	p-switching
Status Indicator	LED yellow channel A/LED white channel B
Diagnostic Indicator	LED red per port
Included in Delivery	
M12 Dust Covers	4 pieces
Attachable Labels	10 pieces






### Bit Assignment

Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
M12 Output								
Byte 0	8B	8A	7B	7A	6B	6A	5B	5A


**Diagnostic Indication**

LED	Indicator	Condition
Us	Green	Logic/sensor power supply OK
Us	Red	Logic/sensor power supply outside limits
UL	Green	Actuator power supply OK
UL	Red	Actuator power supply outside limits
1...8 A	Yellow	Channel status
1...8 DIA A	Red	Periphery error
1...8 B	White	Channel status
1...8 DIA B	Red	Periphery error
ACT	Yellow	PROFIBUS communication active
BF	Red	Bus error, no data exchange with controller
BF	Green	Data exchange with controller
DIA	Green	No peripheral error message available
DIA	Red	Peripheral error message to controller

**Pin Assignment**

Bus Connection M12, B-coded	Power Supply 7/8"	In-/Output M12, A-coded
 <b>IN</b> M12 male connector, 5-poles	 <b>IN</b> 7/8" male connector, 5-poles	 <b>IN</b> 1 = +24 V DC 2 = IN B 3 = GND (0 V) 4 = IN A 5 = Earth/FE
 <b>OUT</b> M12 socket, 5-poles 1 = VP (+5 V)* 2 = Line A 3 = DGND (0 V)* 4 = Line B 5 = n.c. Housing = shielded	 <b>OUT</b> 7/8" socket, 5-poles 1 = GND Actuators UL 2 = GND System/Sensors US 3 = Earth/FE 4 = +24 V System/Sensors US 5 = +24 V Actuators UL	<b>OUT</b> 1 = n. c. 2 = OUT B 3 = GND 4 = OUT A 5 = Earth/FE Housing = FE

\* Signals isolated galvanically from sensors/actuators

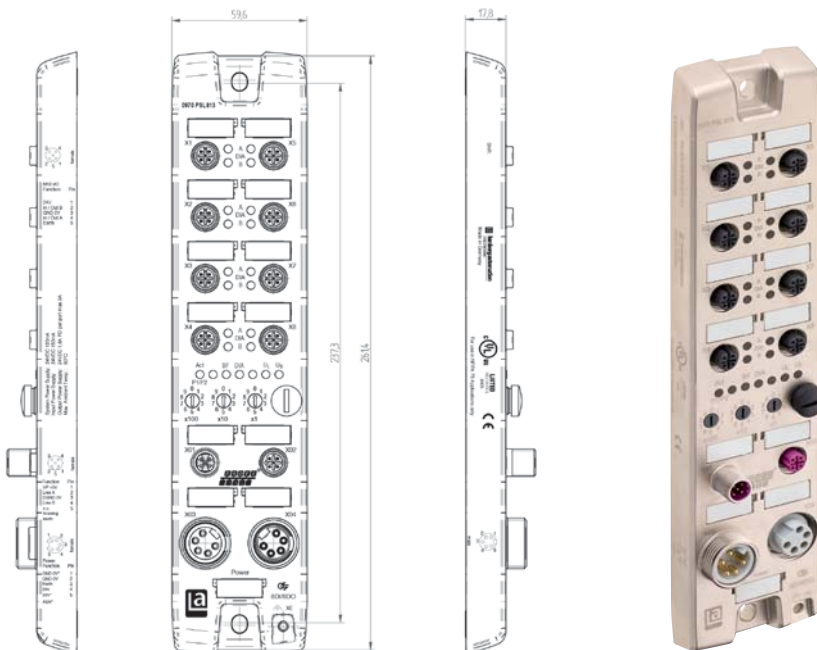

0970 PSL 813-PB-DP 8DI8DO-M12-R

## PROFIBUS – Universal

### Technical Information

Product Description		
Type	0970 PSL 650	0970 PSL 700
	<div></div> <div></div>	<div></div> <div></div>
Description	LioN-S PROFIBUS-DP device with 8 digital I/O channels, channels can be used universally as inputs or outputs, M8 socket, 3-poles, rotary switches for addressing, M12 bus connection, 5-poles, B-coded, M12 power supply, 5-poles	LioN-M PROFIBUS-DP device with 16 digital I/O channels, channels can be used universally as inputs or outputs, combined FIXCON®/M12 socket, rotary switches for addressing, M12 bus connection, 5-poles, B-coded, 7/8" power supply, 5-poles
Technical Data		
Protection Class	IP67	
Environmental Temperature	-10°C to +60°C	
Weight	200 g	380 g
Bus System		
ID Number	09C9 hex	09CA hex
GSD File	Lum_09C9.gsd	Lum_09CA.gsd
Transmission Rate	max. 12 MB	
Address Range	1 to 125	
System/Sensors Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Power Consumption	60 mA	120 mA
Input Power Supply		
Voltage Range	min. (U <sub>System</sub> – 1.5 V)	
Sensor Current	90 mA	200 mA (at T <sub>amp</sub> +30°C)
Indicator	LED green	
Inputs		
Rated Input Current	24 V DC	
Number of Digital Channels	max. 8	max. 16
Status Indicator	LED green per channel	
Diagnostic Indicator	LED red per channel	
Output Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Reverse Polarity Protection	yes	
Indicator	LED green	
Outputs		
Rated Output Current	2 A per channel	1.6 A per channel
Short Circuit-proof	yes	
Max. Current Carrying Capacity	4 A per module	9 A per module
Number of Digital Channels	max. 8	max. 16
Status Indicator	LED yellow per channel	
Diagnostic Indicator	LED red per channel	LED red per channel/socket
Included in Delivery		
M12 Dust Covers	2 pieces	4 pieces
Attachable Labels	10 pieces	

#### Bit Assignment 0970 PSL 650

Bit	7	6	5	4	3	2	1	0
M8 Input								
Byte 0	8	7	6	5	4	3	2	1
M8 Output								
Byte 0	8	7	6	5	4	3	2	1




#### Bit Assignment 0970 PSL 700

Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
Byte 1	8B	8A	7B	7A	6B	6A	5B	5A
M12 Output								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
Byte 1	8B	8A	7B	7A	6B	6A	5B	5A




**Diagnostic Indication**

LED	Indicator	Condition
1...8 (only 0970 PSL 650)	Yellow Red	Channel status Periphery error
1...8 A/B (only 0970 PSL 700)	Yellow	Channel status
1...8 A/B DIA (only 0970 PSL 700)	Red	Periphery error
Us	Green	Sensor/system power supply
U <sub>L</sub>	Green	Actuator power supply
BF	Red	Bus error
DIA	Red	Common indication for periphery faults


**Pin Assignment 0970 PSL 650**

Bus Connection M12	Power Supply M12	In-/Output M8
 <p>1 = +5 V<sup>1</sup> 2 = Line A 3 = GND (0 V)<sup>1</sup> 4 = Line B 5 = Earth Housing = Earth</p>	 <p>1 = +24 V<sup>2</sup> 2 = +24 V<sup>3</sup> 3 = GND (0 V)<sup>2</sup> 4 = GND (0 V)<sup>3</sup> 5 = Earth</p>	 <p>1 = +24 V<sup>3</sup> 3 = GND (0 V) 4 = IN/OUT</p>

**Pin Assignment 0970 PSL 700**

Bus Connection M12	Power Supply 7/8"	In-/Output M12
 <p>1 = +5 V<sup>1</sup> 2 = Line A - GN 3 = GND (0 V)<sup>1</sup> 4 = Line B - RD 5 = Earth Housing = Earth</p>	 <p>1 = GND (0 V)<sup>2</sup> 2 = GND (0 V)<sup>3</sup> 3 = Earth 4 = +24 V<sup>3</sup> 5 = +24 V<sup>2</sup></p>	 <p>1 = +24 V 2 = IN/OUT B 3 = GND (0 V) 4 = IN/OUT A 5 = Earth</p>

1 = Internal signals: galvanically separated to sensors/actuators • 2 = Actuators • 3 = System/sensors

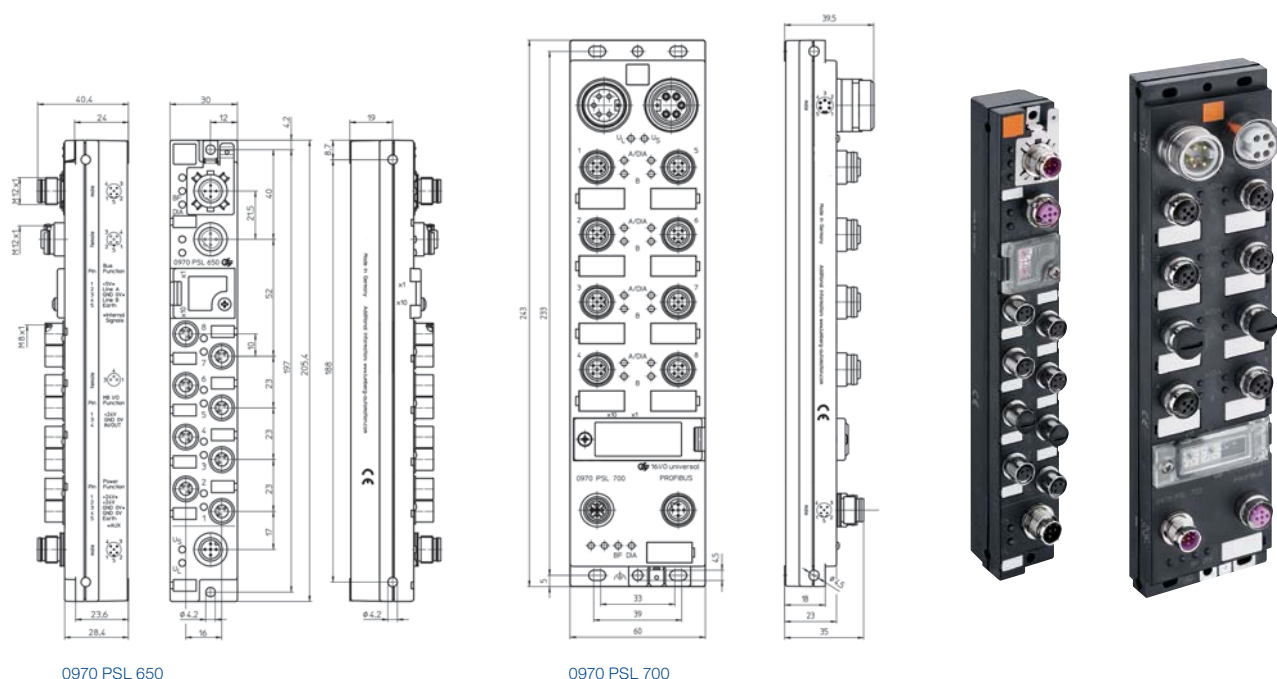





# I/O Modules Active – Stand-Alone: DeviceNet™



**Be certain. Belden.**

## DeviceNet™ – Versatile Use in Factory Automation



DeviceNet™ is part of the CIP protocol family. CIP stands for "Common Industrial Protocol". It is the platform for several communication protocols including DeviceNet, EtherNet/IP and CompoNet, as well as protocol enhancements for safety applications (CIP Safety) and motion control (CIP Motion).

DeviceNet™ is a fieldbus system for the direct connection of sensors and actuators in the field (e.g. proximity switches, motor starters, valves, etc.). DeviceNet™ originated in North America and is presently used worldwide in all areas of plant automation.

DeviceNet™ is based on the CAN specifications (Controller Area Network). However, unlike CAN it is restricted in functionality for easier implementation.





Robust and reliable for meeting the strictest electro-mechanical requirements

## General Technical Data

### Transmission medium

The individual stations are generally connected via a hybrid cable to transmit data (according to RS485) and for power supply (module electronics and sensors). It is made of 2 twisted and shielded pairs of wires contained inside another 360° shielding.

There are two standardized types of cable:

- "Thick cable" for the trunk line
- "Thin cable" with smaller cable cross sections for drop lines

### Network topology

Line structure with drop lines or for drop lines only. The trunk line is terminated by resistors on both sides, the drop lines do not require a terminating resistor.

### Number of devices

- 64 nodes (including master)

### Admissible transmission rates and line lengths

Depending on the transmission rate (Baud rate) the admissible cable lengths (main and stub lines) change as follows:

Transmission Rate	125 kbit/s	250 kbit/s	500 kbit/s
Max. line length main line (thick cable)	500 m (1.640 ft.)	250 m (820 ft.)	100 m (328 ft.)
Max. line length drop line	6 m (20 ft.)	6 m (20 ft.)	6 m (20 ft.)
Max. line length drop lines accumulated	156 m (512 ft.)	78 m (256 ft.)	39 m (128 ft.)

### Configuration of devices

The individual participants are projectioned by means of the EDS files (Electronic Data Sheet) which are provided by the manufacturer for each slave. The EDS files for the Lumberg Automation™ bus modules can be downloaded from [www.lumberg-automation.com/downloads](http://www.lumberg-automation.com/downloads).

### Addressing

Addressing is implemented via software or rotary address switches. Software addressing can be implemented via addressing tools or the master.



## Matrix DeviceNet™

Function	Slots Bus Type		Slots I/O Type		Slots Power Type		
	M12	7/8"	M8	M12	M12	M23	7/8"
<b>DeviceNet™</b>							
<b>LioN-M</b>							
16 Digital IN	–	✓	–	✓	–	–	–
16 Digital IN/OUT (1.6 A)	–	✓	–	✓	–	–	✓
<b>LioN-S</b>							
8 Digital IN	✓	–	✓	–	–	–	–
8 Digital IN/OUT (0.5 A)	✓	–	✓	–	✓	–	–
<b>LioN-Classic</b>							
16 Digital IN	✓	✓	–	✓	–	–	–
8 Digital OUT (2 A)	✓	✓	–	✓	–	–	✓
16 Digital OUT (0.5 A)	✓	✓	–	✓	–	–	✓
8 Digital IN/4 Digital OUT (2 A)	–	–	–	✓	–	–	✓
8 Digital IN/8 Digital OUT (0.5 A)	✓	✓	–	✓	–	–	✓
<b>Accessories DeviceNet™</b>							
Cord sets, single-ended	✓	✓	✓	✓	✓	–	✓
Cord sets, double-ended	✓	✓	✓	✓	✓	–	✓
Field attachable connectors	✓	✓	✓	✓	✓	–	✓
T-connectors	✓	✓	✓	✓	✓	–	✓



## DeviceNet™ – Digital Inputs

### Technical Information

Product Description		
Type	0930 DSL 651	0930 DSL 701
	<div></div>	<div></div>
Description	LioN-S DeviceNet™ device with 8 digital inputs to connect standard sensors, M8 socket, 3-poles, rotary switches for addressing, M12 bus connection, 5-poles	LioN-M DeviceNet™ device with 16 digital inputs to connect standard sensors, combined FIXCON®/M12 socket, 5-poles, rotary switches for addressing, 7/8" bus connection, 5-poles
Technical Data		
Protection Class	IP67	
Environmental Temperature	-10°C to +60°C	
Weight	190 g	380 g
Bus System		
Transmission Rate	max. 500 kBaud	
Address Range	0 to 63	
System/Sensors Power Supply		
Rated Voltage	24 V DC	
Voltage Range	11 to 30 V DC	
Power Consumption	60 mA	100 mA
Input Power Supply		
Voltage Range	min. (U <sub>system</sub> – 1.5 V)	
Sensor Current	100 mA (at T <sub>amp</sub> +30°C)	200 mA (at T <sub>amp</sub> +30°C)
Indicator	LED green	
Inputs (Type 3 acc. to IEC 61131-2)		
Rated Input Current	24 V DC	
Number of Digital Channels	max. 8	max. 16
Status Indicator	LED yellow per channel	
Diagnostic Indicator	LED red per channel	–
Included in Delivery		
M12 Dust Covers	2 pieces	4 pieces
Attachable Labels	10 pieces	

### Bit Assignment 0930 DSL 651

Bit	7	6	5	4	3	2	1	0
M8 Input								
Byte 0	8	7	6	5	4	3	2	1
Diagnostic								
Byte 1	S8	S7	S6	S5	S4	S3	S2	S1

S1 to 8: Socket status 1 to 8

### Bit Assignment 0930 DSL 701



Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
Byte 1	8B	8A	7B	7A	6B	6A	5B	5A
Diagnostic								
Byte 2	S8	S7	S6	S5	S4	S3	S2	S1

### Diagnostic Indication



LED	Indicator	Condition
1...8 (only 0930 DSL 651)	Yellow Red	Channel status Periphery error
1...8 A/B (only 0930 DSL 701)	Yellow	Channel status
1...8 A/DIA (only 0930 DSL 701)	Red	Periphery error
U <sub>s</sub>	Green	Sensor power supply
U <sub>L</sub> (only 0930 DSL 651)	Green	Actuator power supply
MS (Module status)	Green Green blinking Red Red blinking Red/green blinking	Device is ready for operating Wrong configuration Unrecoverable fault Recoverable fault Self test is running
NS (Network status)	Green Green blinking Red blinking Red	Online, communication with PLC Online, no communication with PLC Time-out state of one or more I/O connections Failed communication device, Bus-off status, duplicate MAC-ID

The diagnostic message of the fieldbus is made at the DeviceNet™ modules of Lumberg Automation™ via an additional input byte, which is appended to the standard input process data. Depending on the module, the diagnosis is communicated module- or port-related. It is generated if its an overload, an actuator low voltage and an actuator short-circuit. In addition, corresponding LEDs simplify troubleshooting.


Pin Assignment 0930 DSL 651

Bus Connection M12	Input M8
	


Pin Assignment 0930 DSL 701

Bus Connection 7/8"	Input M12
	

1 = System/sensors

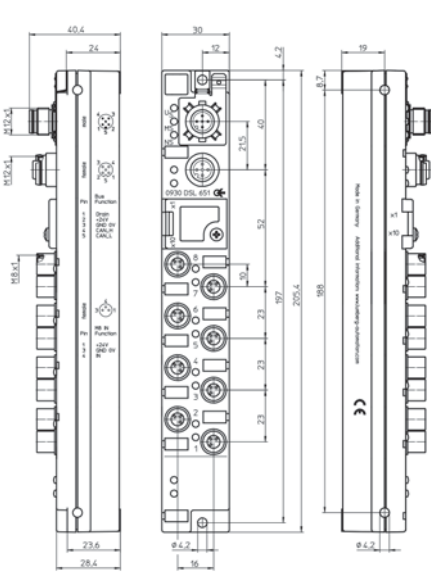

0930 DSL 651

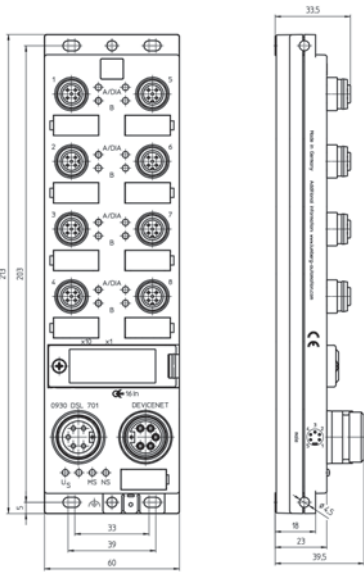











0930 DSL 701



## DeviceNet™ – Digital Inputs

### Technical Information

Product Description		
Type	0930 DSL 108	0930 DSL 109
	    	    
Description	LioN-Classic DeviceNet™ device with 16 digital inputs (p-switching) to connect standard sensors, combined FIXCON®/M12 socket, 5-poles, rotary switches for addressing, M12 bus connection, 5-poles	LioN-Classic DeviceNet™ device with 16 digital inputs (n-switching) to connect standard sensors, combined FIXCON®/M12 socket, 5-poles, rotary switches for addressing, M12 bus connection, 5-poles
Technical Data		
Protection Class	IP67	
Environmental Temperature	0°C to +60°C	
Weight	570 g	
Bus System		
Transmission Rate	max. 500 kBaud	
Address Range	0 to 63	
System/Sensors Power Supply		
Rated Voltage	24 V DC	
Voltage Range	11 to 30 V DC	
Power Consumption	max. 80 mA	
Input Power Supply		
Voltage Range	min. (U <sub>system</sub> – 1.5 V)	
Sensor Current	max. 800 mA	
Indicator	LED green	
Inputs (Type 3 acc. to IEC 61131-2)		
Rated Input Current	24 V DC	
Number of Digital Channels	16	
Status Indicator	LED yellow per channel	
Diagnostic Indicator	–	
Included in Delivery		
M12 Dust Covers	2 pieces	
Attachable Labels	10 pieces	

### Bit Assignment

Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	8A	7A	6A	5A	4A	3A	2A	1A
Byte 1	8B	7B	6B	5B	4B	3B	2B	1B
Diagnostic								
Byte 2	OVL	–	–	–	–	–	–	–



OVL: Overload status

**Diagnostic Indication**


LED	Indicator	Condition
1...8 A/B	Yellow	Channel status
Us	Green	Sensor power supply
UL	Green	Module electronic supply
OVL	Red	Sensor short circuit/sensor overload
MS (Module status)	Green Green blinking Red Red blinking Red/green blinking	Device is ready for operating Wrong configuration Unrecoverable fault Recoverable fault Self test is running
NS (Network status)	Green Green blinking Red blinking Red	Online, communication with PLC Online, no communication with PLC Time-out state of one or more I/O connections Failed communication device, Bus-off status, duplicate MAC-ID

The diagnostic message of the fieldbus is made at the DeviceNet™ modules of Lumberg Automation™ via an additional input byte, which is appended to the standard input process data. Depending on the module, the diagnosis is communicated module- or port-related. It is generated if its an overload, an actuator low voltage and an actuator short-circuit. In addition, corresponding LEDs simplify troubleshooting.

**Pin Assignment**

Bus Connection M12	Input M12
 <ul style="list-style-type: none"> <li>1 = Drain</li> <li>2 = +24 V<sup>1</sup></li> <li>3 = GND (0 V)<sup>1</sup></li> <li>4 = CAN_H</li> <li>5 = CAN_L</li> </ul>	 <ul style="list-style-type: none"> <li>1 = +24 V</li> <li>2 = IN B</li> <li>3 = GND (0 V)</li> <li>4 = IN A</li> <li>5 = Earth</li> </ul>

1 = System/sensors

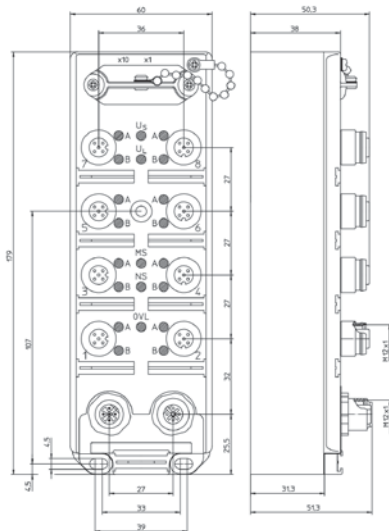











0930 DSL 108 | 0930 DSL 109



## DeviceNet™ – Digital Inputs

### Technical Information

Product Description		
Type	0930 DSL 312	0930 DSL 313
	<div></div> <div></div>	<div></div> <div></div>
Description	LioN-Classic DeviceNet™ device with 16 digital inputs (p-switching) to connect standard sensors, combined FIXCON®/M12 socket, 5-poles, rotary switches for addressing, 7/8" bus connection, 5-poles	LioN-Classic DeviceNet™ device with 16 digital inputs (n-switching) to connect standard sensors, combined FIXCON®/M12 socket, 5-poles, rotary switches for addressing, 7/8" bus connection, 5-poles
Technical Data		
Protection Class	IP67	
Environmental Temperature	0°C to +60°C	
Weight	570 g	
Bus System		
Transmission Rate	max. 500 kBaud	
Address Range	0 to 63	
System/Sensors Power Supply		
Rated Voltage	24 V DC	
Voltage Range	11 to 30 V DC	
Power Consumption	max. 80 mA	
Input Power Supply		
Voltage Range	min. (U <sub>System</sub> – 1.5 V)	
Sensor Current	max. 800 mA	
Indicator	LED green	
Inputs (Type 3 acc. to IEC 61131-2)		
Rated Input Current	24 V DC	
Number of Digital Channels	16	
Status Indicator	LED yellow per channel	
Diagnostic Indicator	–	
Included in Delivery		
M12 Dust Covers	2 pieces	
Attachable Labels	10 pieces	

### Bit Assignment

Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	8A	7A	6A	5A	4A	3A	2A	1A
Byte 1	8B	7B	6B	5B	4B	3B	2B	1B
Diagnostic								
Byte 2	OVL	–	–	–	–	–	–	–

OVL: Overload status





**Diagnostic Indication**


LED	Indicator	Condition
1...8 A/B	Yellow	Channel status
Us	Green	Sensor power supply
UL	Green	Module electronic supply
OVL	Red	Sensor short circuit/sensor overload
MS (Module status)	Green Green blinking Red Red blinking Red/green blinking	Device is ready for operating Wrong configuration Unrecoverable fault Recoverable fault Self test is running
NS (Network status)	Green Green blinking Red blinking Red	Online, communication with PLC Online, no communication with PLC Time-out state of one or more I/O connections Failed communication device, Bus-off status, duplicate MAC-ID

The diagnostic message of the fieldbus is made at the DeviceNet™ modules of Lumberg Automation™ via an additional input byte, which is appended to the standard input process data. Depending on the module, the diagnosis is communicated module- or port-related. It is generated if its an overload, an actuator low voltage and an actuator short-circuit. In addition, corresponding LEDs simplify troubleshooting.

**Pin Assignment**

Bus Connection 7/8"	Input M12
	

1 = System/sensors

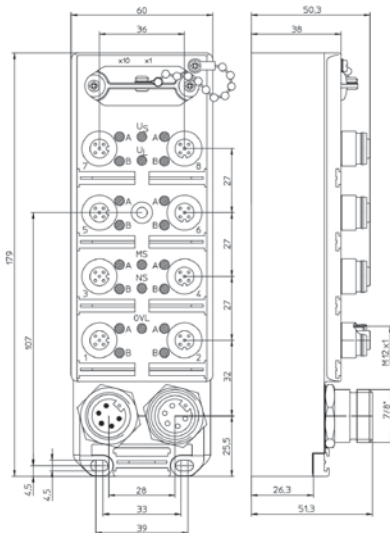











0930 DSL 312 | 0930 DSL 313



## DeviceNet™ – Digital Outputs

### Technical Information

Product Description		
Type	0930 DSL 107	0930 DSL 114
	<div></div>	<div></div>
Description	LioN-Classic DeviceNet™ device with 8 digital outputs (2 A) to connect standard actuators, combined FIXCON®/M12 socket, 5-poles, rotary switches for addressing, M12 bus connection, 5-poles, 7/8" actuator supply, 3-poles	LioN-Classic DeviceNet™ device with 16 digital outputs (0.7 A) to connect standard actuators, combined FIXCON®/M12 socket, 5-poles, rotary switches for addressing, M12 bus connection, 5-poles, 7/8" actuator supply, 3-poles
Technical Data		
Protection Class	IP67	
Environmental Temperature	0°C to +60°C	
Weight	570 g	
Bus System		
Transmission Rate	max. 500 kBaud	
Address Range	0 to 63	
System/Sensors Power Supply		
Rated Voltage	24 V DC	
Voltage Range	11 to 30 V DC	
Power Consumption	max. 80 mA	
Output Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Reverse Polarity Protection	yes	
Indicator	LED green	
Outputs (Type 2 A acc. to IEC 61131-2)		
Rated Output Current	2 A per channel	0.7 A per channel
Short Circuit-proof	yes	
Max. Current Carrying Capacity	12 A per module	11.2 A per module
Number of Digital Channels	8	16
Status Indicator	LED yellow per channel	
Diagnostic Indicator	LED red per channel	
Included in Delivery		
M12 Dust Covers	2 pieces	
Attachable Labels	10 pieces	

#### Bit Assignment 0930 DSL 107

Bit	7	6	5	4	3	2	1	0
M12 Output								
Byte 0	8	7	6	5	4	3	2	1
Diagnostic Input								
Byte 0	–	–	–	–	–	–	ASC	UVA

ASC: Actuator short-circuit  
UVA: Undervoltage actuator

#### Bit Assignment 0930 DSL 114




Bit	7	6	5	4	3	2	1	0
M12 Output								
Byte 0	8A	7A	6A	5A	4A	3A	2A	1A
Byte 1	8B	7B	6B	5B	4B	3B	2B	1B
Diagnostic Input								
Byte 0	–	–	–	–	–	–	ASC	UVA

**Diagnostic Indication**




LED	Indicator	Condition
1...8 A (only 0930 DSL 107)	Yellow	Channel status
1...8 (only 0930 DSL 107)	Red	Actuator short-circuit/actuator overload
1...8 A/B (only 0930 DSL 114)	Yellow Red	Channel status Actuator short-circuit/actuator overload
Us	Green	Actuator power supply
U <sub>L</sub>	Green	Module electronic supply
MS (Module status)	Green Green blinking Red Red blinking Red/green blinking	Device is ready for operating Wrong configuration Unrecoverable fault Recoverable fault Self test is running
NS (Network status)	Green Green blinking Red blinking Red	Online, communication with PLC Online, no communication with PLC Time-out state of one or more I/O connections Failed communication device, Bus-off status, duplicate MAC-ID

The diagnostic message of the fieldbus is made at the DeviceNet™ modules of Lumberg Automation™ via an additional input byte, which is appended to the standard input process data. Depending on the module, the diagnosis is communicated module- or port-related. It is generated if its an overload, an actuator low voltage and an actuator short-circuit. In addition, corresponding LEDs simplify troubleshooting.


**Pin Assignment 0930 DSL 107**

Bus Connection M12	Actuator Supply 7/8"	Output M12
 <ul style="list-style-type: none"> <li>1 = Drain</li> <li>2 = +24 V<sup>1</sup></li> <li>3 = GND (0 V)<sup>1</sup></li> <li>4 = CAN_H</li> <li>5 = CAN_L</li> </ul>	 <ul style="list-style-type: none"> <li>1 = Earth</li> <li>2 = +24 V</li> <li>3 = GND (0 V)</li> </ul>	 <ul style="list-style-type: none"> <li>1 = n.c.</li> <li>2 = n.c.</li> <li>3 = GND (0 V)</li> <li>4 = OUT</li> <li>5 = Earth</li> </ul>

**Pin Assignment 0930 DSL 114**





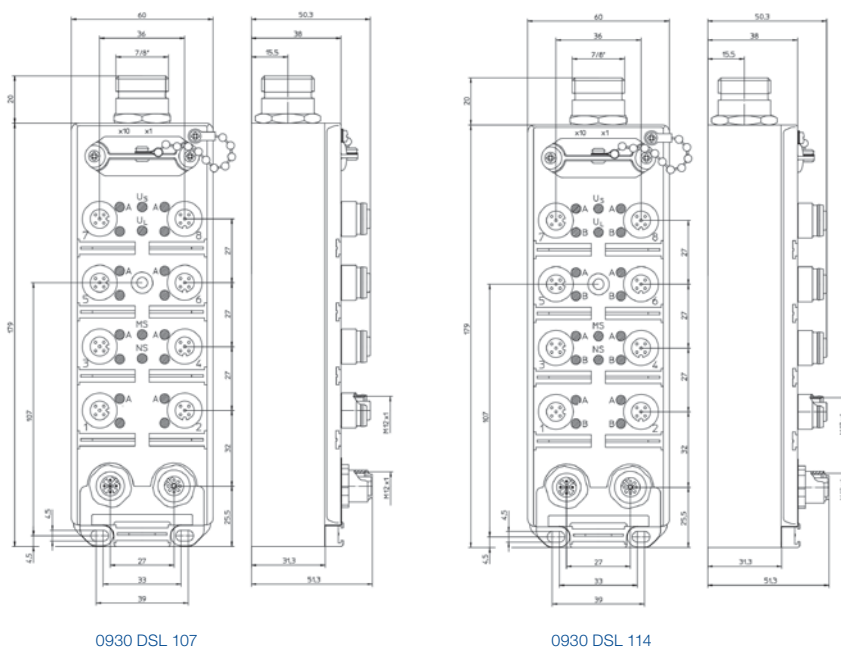





Bus Connection M12	Actuator Supply 7/8"	Output M12
 <ul style="list-style-type: none"> <li>1 = Drain</li> <li>2 = +24 V<sup>1</sup></li> <li>3 = GND (0 V)<sup>1</sup></li> <li>4 = CAN_H</li> <li>5 = CAN_L</li> </ul>	 <ul style="list-style-type: none"> <li>1 = Earth</li> <li>2 = +24 V</li> <li>3 = GND (0 V)</li> </ul>	 <ul style="list-style-type: none"> <li>1 = n.c.</li> <li>2 = OUT B</li> <li>3 = GND (0 V)</li> <li>4 = OUT A</li> <li>5 = Earth</li> </ul>

1 = System



## DeviceNet™ – Digital Outputs

### Technical Information

Product Description		
Type	0930 DSL 311	0930 DSL 315
	<div></div> <div></div>	<div></div> <div></div>
Description	LioN-Classic DeviceNet™ device with 8 digital outputs (2 A) to connect standard actuators, combined FIXCON®/M12 socket, 5-poles, rotary switches for addressing, 7/8" bus connection, 5-poles, 7/8" actuator supply, 3-poles	LioN-Classic DeviceNet™ device with 16 digital outputs (0.7 A) to connect standard actuators, combined FIXCON®/M12 socket, 5-poles, rotary switches for addressing, 7/8" bus connection, 5-poles, 7/8" actuator supply, 3-poles
Technical Data		
Protection Class	IP67	
Environmental Temperature	0°C to +60°C	
Weight	570 g	
Bus System		
Transmission Rate	max. 500 kBaud	
Address Range	0 to 63	
System/Sensors Power Supply		
Rated Voltage	24 V DC	
Voltage Range	11 to 30 V DC	
Power Consumption	max. 80 mA	
Output Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Reverse Polarity Protection	yes	
Indicator	LED green	
Outputs (Type 2 A acc. to IEC 61131-2)		
Rated Output Current	2 A per channel	0.7 A per channel
Short Circuit-proof	yes	
Max. Current Carrying Capacity	12 A per module	11.2 A per module
Number of Digital Channels	8	16
Status Indicator	LED yellow per channel	
Diagnostic Indicator	LED red per channel	
Included in Delivery		
M12 Dust Covers	2 pieces	
Attachable Labels	10 pieces	

#### Bit Assignment 0930 DSL 311

Bit	7	6	5	4	3	2	1	0
M12 Output								
Byte 0	8	7	6	5	4	3	2	1
Diagnostic Input								
Byte 0	–	–	–	–	–	–	ASC	UVA

ASC: Actuator short-circuit  
UVA: Undervoltage actuator

#### Bit Assignment 0930 DSL 315




Bit	7	6	5	4	3	2	1	0
M12 Output								
Byte 0	8A	7A	6A	5A	4A	3A	2A	1A
Byte 1	8B	7B	6B	5B	4B	3B	2B	1B
Diagnostic Input								
Byte 0	–	–	–	–	–	–	ASC	UVA

**Diagnostic Indication**




LED	Indicator	Condition
1...8 A (only 0930 DSL 311)	Yellow	Channel status
1...8 (only 0930 DSL 311)	Red	Actuator short-circuit/actuator overload
1...8 A/B (only 0930 DSL 315)	Yellow	Channel status
	Red	Actuator short-circuit/actuator overload
Us	Green	Actuator power supply
U <sub>L</sub>	Green	Module electronic supply
MS (Module status)	Green Green blinking Red Red blinking Red/green blinking	Device is ready for operating Wrong configuration Unrecoverable fault Recoverable fault Self test is running
NS (Network status)	Green Green blinking Red blinking Red	Online, communication with PLC Online, no communication with PLC Time-out state of one or more I/O connections Failed communication device, Bus-off status, duplicate MAC-ID

The diagnostic message of the fieldbus is made at the DeviceNet™ modules of Lumberg Automation™ via an additional input byte, which is appended to the standard input process data. Depending on the module, the diagnosis is communicated module- or port-related. It is generated if its an overload, an actuator low voltage and an actuator short-circuit. In addition, corresponding LEDs simplify troubleshooting.


**Pin Assignment 0930 DSL 311**

Bus Connection 7/8"	Actuator Supply 7/8"	Output M12
 <p>1 = Drain 2 = +24 V<sup>1</sup> 3 = GND (0 V)<sup>1</sup> 4 = CAN_H 5 = CAN_L</p>	 <p>1 = Earth 2 = +24 V 3 = GND (0 V)</p>	 <p>1 = n.c. 2 = n.c. 3 = GND (0 V) 4 = OUT 5 = Earth</p>


**Pin Assignment 0930 DSL 315**

Bus Connection 7/8"	Actuator Supply 7/8"	Output M12
 <p>1 = Drain 2 = +24 V <sup>1</sup> 3 = GND (0 V) <sup>1</sup> 4 = CAN_H 5 = CAN_L</p>	 <p>1 = Earth 2 = +24 V 3 = GND (0 V)</p>	 <p>1 = n.c. 2 = OUT B 3 = GND (0 V) 4 = OUT A 5 = Earth</p>

1 = System

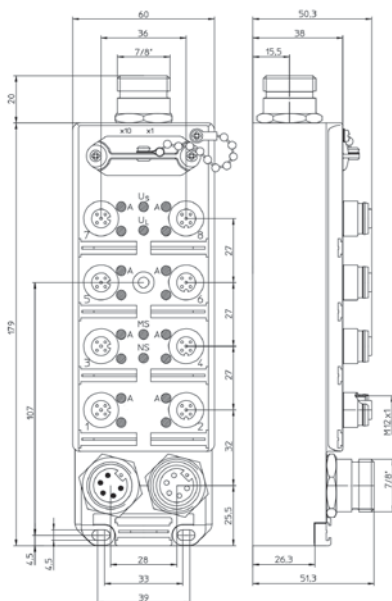

0930 DSL 311

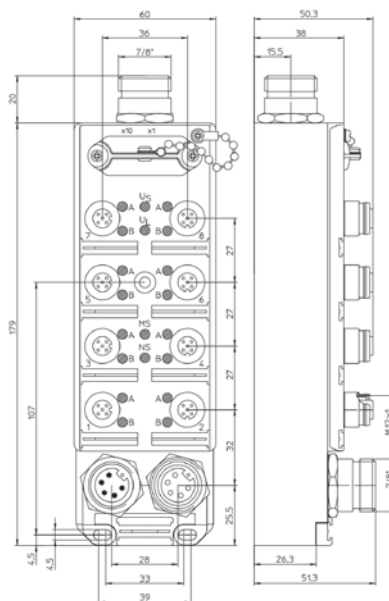









0930 DSL 315



## DeviceNet™ – Digital In- and Outputs

### Technical Information

Product Description		
Type	0930 DSL 113	0930 DSL 314
	<div><div><div>UL</div><div></div><div></div><div></div></div></div>	<div><div><div>UL</div><div></div><div></div><div></div></div></div>
Description	LioN-Classic DeviceNet™ device with 8 digital inputs to connect standard sensors and 8 digital outputs (0.5 A) to connect standard actuators, combined FIXCON®/M12 socket, 5-poles, rotary switches for addressing, M12 bus connection, 5-poles, 7/8" actuator supply, 3-poles	LioN-Classic DeviceNet™ device with 8 digital inputs to connect standard sensors and 8 digital outputs (0.5 A) to connect standard actuators, combined FIXCON®/M12 socket, 5-poles, rotary switches for addressing, 7/8" bus connection, 5-poles, 7/8" actuator supply, 3-poles
Technical Data		
Protection Class	IP67	
Environmental Temperature	0°C to +60°C	
Weight	535 g	
Bus System		
Transmission Rate	max. 500 kBaud	
Address Range	0 to 63	
System/Sensors Power Supply		
Rated Voltage	24 V DC	
Voltage Range	11 to 30 V DC	
Power Consumption	max. 80 mA	
Input Power Supply		
Voltage Range	min. (U <sub>System</sub> – 1.5 V)	
Sensor Current	max. 800 mA	
Indicator	LED green	
Inputs (Type 2 acc. to IEC 61131-2)		
Rated Input Current	24 V DC	
Number of Digital Channels	8	
Status Indicator	LED green per channel	
Diagnostic Indicator	LED red per channel	
Output Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Reverse Polarity Protection	yes	
Indicator	LED green	
Outputs (Type 0.5 A acc. to IEC 61131-2)		
Rated Output Current	0.7 A per channel	
Short Circuit-proof	yes	
Max. Current Carrying Capacity	5.6 A per module	
Number of Digital Channels	8	
Status Indicator	LED yellow per channel	
Diagnostic Indicator	LED red per channel	
Included in Delivery		
M12 Dust Covers	2 pieces	
Attachable Labels	10 pieces	

### Bit Assignment

Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	7B	5B	3B	1B	7A	5A	3A	1A
M12 Output								
Byte 0	8B	6B	4B	2B	8A	6A	4A	2A
Diagnostic Input								
Byte 1	OVL	–	–	–	–	–	ASC	UVA





OVL: Overload status  
 ASC: Actuator short-circuit  
 UVA: Undervoltage actuator

**Diagnostic Indication**





LED	Indicator	Condition
1...8 A/B	Yellow	Channel status
2, 4, 6, 8 A/B	Red	Actuator short-circuit/actuator overload
Us	Green	Actuator power supply
U <sub>L</sub>	Green	Module electronic supply
OVL	Red	Sensor short circuit/sensor overload
MS (Module status)	Green Green blinking Red Red blinking Red/green blinking	Device is ready for operating Wrong configuration Unrecoverable fault Recoverable fault Self test is running
NS (Network status)	Green Green blinking Red blinking Red	Online, communication with PLC Online, no communication with PLC Time-out state of one or more I/O connections Failed communication device, Bus-off status, duplicate MAC-ID

The diagnostic message of the fieldbus is made at the DeviceNet™ modules of Lumberg Automation™ via an additional input byte, which is appended to the standard input process data. Depending on the module, the diagnosis is communicated module- or port-related. It is generated if its an overload, an actuator low voltage and an actuator short-circuit. In addition, corresponding LEDs simplify troubleshooting.


**Pin Assignment 0930 DSL 113**

Bus Connection M12	Actuator Supply 7/8"	In-/Output M12												
 <p>1 = Drain 2 = +24 V<sup>1</sup> 3 = GND (0 V)<sup>1</sup> 4 = CAN_H 5 = CAN_L</p> 	 <p>1 = Earth 2 = +24 V 3 = GND</p>	 <table><thead><tr><th>IN</th><th>OUT</th></tr></thead><tbody><tr><td>1 = +24 V</td><td>1 = n.c.</td></tr><tr><td>2 = IN B</td><td>2 = OUT B</td></tr><tr><td>3 = GND (0 V)</td><td>3 = GND (0 V)</td></tr><tr><td>4 = IN A</td><td>4 = OUT A</td></tr><tr><td>5 = Earth</td><td>5 = Earth</td></tr></tbody></table>	IN	OUT	1 = +24 V	1 = n.c.	2 = IN B	2 = OUT B	3 = GND (0 V)	3 = GND (0 V)	4 = IN A	4 = OUT A	5 = Earth	5 = Earth
IN	OUT													
1 = +24 V	1 = n.c.													
2 = IN B	2 = OUT B													
3 = GND (0 V)	3 = GND (0 V)													
4 = IN A	4 = OUT A													
5 = Earth	5 = Earth													


**Pin Assignment 0930 DSL 314**

Bus Connection 7/8"	Actuator Supply 7/8"	In-/Output M12												
 <p>1 = Drain 2 = +24 V<sup>1</sup> 3 = GND (0 V)<sup>1</sup> 4 = CAN_H 5 = CAN_L</p> 	 <p>1 = Earth 2 = +24 V 3 = GND</p>	 <table><thead><tr><th>IN</th><th>OUT</th></tr></thead><tbody><tr><td>1 = +24 V</td><td>1 = n.c.</td></tr><tr><td>2 = IN B</td><td>2 = OUT B</td></tr><tr><td>3 = GND (0 V)</td><td>3 = GND (0 V)</td></tr><tr><td>4 = IN A</td><td>4 = OUT A</td></tr><tr><td>5 = Earth</td><td>5 = Earth</td></tr></tbody></table>	IN	OUT	1 = +24 V	1 = n.c.	2 = IN B	2 = OUT B	3 = GND (0 V)	3 = GND (0 V)	4 = IN A	4 = OUT A	5 = Earth	5 = Earth
IN	OUT													
1 = +24 V	1 = n.c.													
2 = IN B	2 = OUT B													
3 = GND (0 V)	3 = GND (0 V)													
4 = IN A	4 = OUT A													
5 = Earth	5 = Earth													

1 = System/sensors

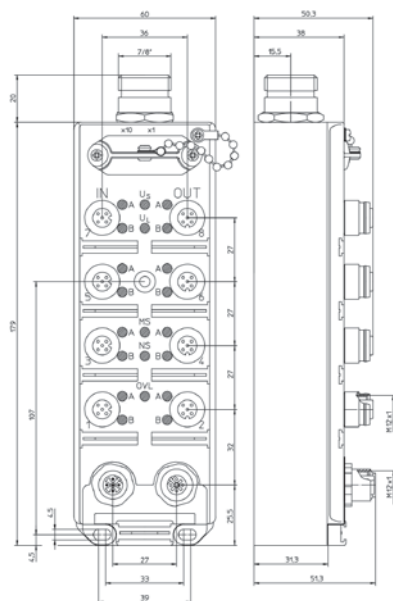

0930 DSL 113

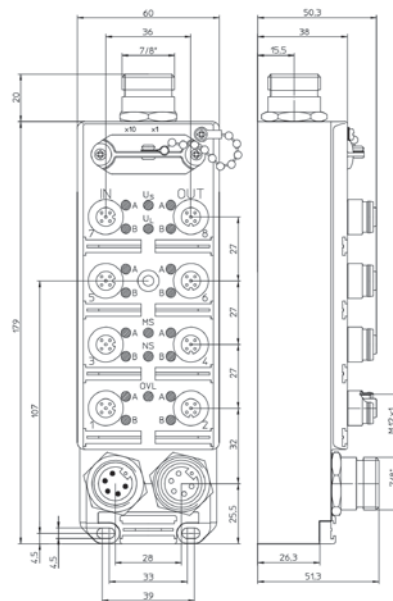









0930 DSL 314





## DeviceNet™ – Universal

### Technical Information

Product Description		
Type	0930 DSL 650	0930 DSL 700
	<div></div> <div></div>	<div></div> <div></div>
Description	LioN-S DeviceNet™ device with 8 digital I/O channels, channels can be used universally as inputs or outputs, M8 socket, 3-poles, rotary switches for addressing, M12 bus connection, 5-poles, M12 actuator supply, 5-poles	LioN-M DeviceNet™ device with 16 digital I/O channels, channels can be used universally as inputs or outputs, combined FIXCON®/M12 socket, 5-poles, rotary switches for addressing, 7/8" bus connection, 5-poles, 7/8" power supply, 4-poles
Technical Data		
Protection Class	IP67	
Environmental Temperature	-10°C to +60°C	
Weight	200 g	380 g
Bus System		
Transmission Rate	max. 500 kBaud	
Address Range	0 to 63	
System/Sensors Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Power Consumption	60 mA	90 mA
Input Power Supply		
Voltage Range	min. (U <sub>system</sub> – 1.5 V)	
Sensor Current	100 mA (at T <sub>amp</sub> +30°C)	200 mA (at T <sub>amp</sub> +30°C)
Indicator	LED green	
Inputs (Type 3 acc. to IEC 61131-2)		
Rated Input Current	24 V DC	
Number of Digital Channels	max. 8	max. 16
Status Indicator	LED green per channel	
Diagnostic Indicator	LED red per channel	LED red per socket
Output Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Reverse Polarity Protection	yes	
Indicator	LED green	
Outputs		
Rated Output Current	0.5 A per channel	1.6 A per channel
Short Circuit-proof	yes	
Max. Current Carrying Capacity	4 A per module	9 A per module
Number of Digital Channels	max. 8	max. 16
Status Indicator	LED yellow per channel	
Diagnostic Indicator	LED red per channel	LED red per socket
Included in Delivery		
M12 Dust Covers	2 pieces	
Attachable Labels	10 pieces	

#### Bit Assignment 0930 DSL 650

Bit	7	6	5	4	3	2	1	0
M8 Input/Output								
Byte 0	8	7	6	5	4	3	2	1
Diagnostic								
Byte 1	S8	S7	S6	S5	S4	S3	S2	S1

S1 to 8: Socket status 1 to 8

#### Bit Assignment 0930 DSL 700

Bit	7	6	5	4	3	2	1	0
M12 Input/Output								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
Byte 1	8B	8A	7B	7A	6B	6A	5B	5A
Diagnostic								
Byte 2	S8	S7	S6	S5	S4	S3	S2	S1

**Diagnostic Indication**

LED	Indicator	Condition
1...8 (only 0930 DSL 650)	Yellow Red	Channel status Periphery error
1...8 A/B (only 0930 DSL 700)	Yellow	Channel status
1...8 A/DIA (only 0930 DSL 700)	Red	Periphery error
Us	Green	Sensor power supply
U <sub>L</sub>	Green	Actuator power supply
MS (Module status)	Green Green blinking Red Red blinking Red/green blinking	Device is ready for operating Wrong configuration Unrecoverable fault Recoverable fault Self test is running
NS (Network status)	Green Green blinking Red blinking Red	Online, communication with PLC Online, no communication with PLC Time-out state of one or more I/O connections Failed communication device, Bus-off status, duplicate MAC-ID

The diagnostic message of the fieldbus is made at the DeviceNet™ modules of Lumberg Automation™ via an additional input byte, which is appended to the standard input process data. Depending on the module, the diagnosis is communicated module- or port-related. It is generated if its an overload, an actuator low voltage and an actuator short-circuit. In addition, corresponding LEDs simplify troubleshooting.


**Pin Assignment 0930 DSL 650**

Bus Connection M12	Actuator Supply M12	In-/Output M8
<p>1 = Drain 2 = +24 V<sup>1</sup> 3 = GND (0 V)<sup>1</sup> 4 = CAN_H 5 = CAN_L Housing = Earth</p>	<p>1 = +24 V<sup>2</sup> 2 = +24 V<sup>3</sup> 3 = GND (0 V)<sup>2</sup> 4 = GND (0 V)<sup>3</sup> 5 = Earth</p>	<p>1 = +24 V 3 = GND (0 V) 4 = IN/OUT</p>

**Pin Assignment 0930 DSL 700**

Bus Connection 7/8"	Power Supply 7/8"	In-/Output M12
<p>1 = Drain 2 = +24 V<sup>1</sup> 3 = GND (0 V)<sup>1</sup> 4 = CAN_H 5 = CAN_L Housing = Earth</p>	<p>1 = +24 V<sup>2</sup> 2 = +24 V<sup>3</sup> 3 = Earth 4 = GND (0 V)<sup>2/3</sup></p>	<p>1 = +24 V 2 = IN/OUT B 3 = GND (0 V) 4 = IN/OUT A 5 = Earth</p>

1 = System: galvanically separated to sensors/actuators • 2 = Actuators • 3 = Sensors

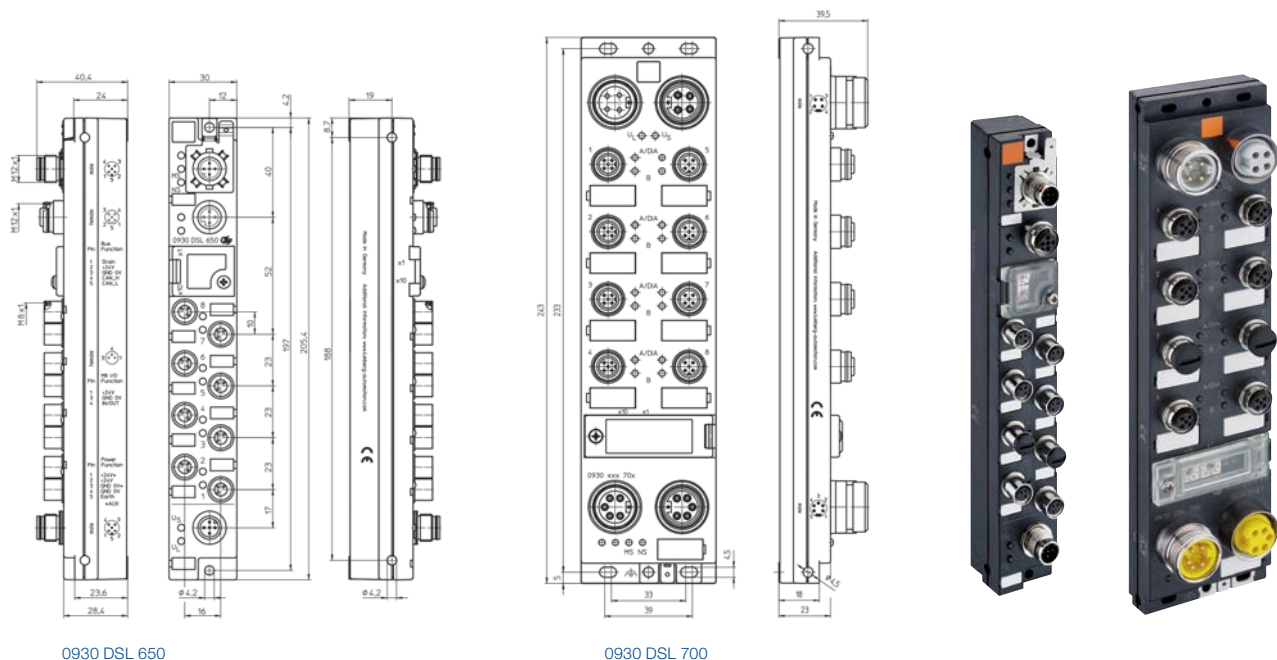





# I/O Modules Active – Stand-Alone: CANopen®



Be certain. Belden.

## CANopen® – for Decentralized Use

**CANopen**

CANopen® is an open communication profile for the CAN Bus (Controller Area Network) developed for automotive engineering. In the meantime, CANopen® is used in different areas like medical technology, maritime, traffic control, utility vehicles and automation.

Decentralized installation  
for optimal space  
savings in machines  
and systems

## General Technical Data

### Transmission medium

The connection between individual stations (nodes) is implemented via a hybrid cable for the transmission of data as well as the system and sensor supply.

It comprises two twisted and shielded lead pairs and total sheathing:

- "Thick cable" as the master line and/or for the bridging of greater distances.
- "Thin cable" with smaller cable cross sections for stub cables and networks of smaller spatial expansion.

### Network topology

Line structure or line structure with stub cables. The main line must be terminated with resistors ( $120\ \Omega$ ) on both sides.

### Number of devices

- 127 nodes (including master)

### Admissible transmission rates and line lengths

The maximum admissible length of line depends on the Baud rate used and the number of modules.

Transmission Rate	125 kbit/s	250 kbit/s	500 kbit/s	1.000 kbit/s
Max. line length	–	200 m	100 m	30 m
Max. line length stub line	–	3 m	1 m	0.3 m
Max. line length stub lines accumulated	–	78 m	39 m	3 m

### Configuration of devices

The individual participants are projectioned by means of the EDS files (Electronic Data Sheet) which are provided by the manufacturer for each slave. The EDS files for the Lumberg Automation™ bus modules can be downloaded from [www.lumberg-automation.com/downloads](http://www.lumberg-automation.com/downloads).

### Addressing

Addressing is implemented via rotary address switches.






## Matrix CANopen®

Function	Slots Bus Type		Slots I/O Type		Slots Power Type		
	M12	M23	M8	M12	M12	M23	7/8"
<b>CANopen®</b>							
<b>LioN-S</b>							
8 Digital IN	✓	–	✓	–	–	–	–
8 Digital IN/OUT (0.5 A)	✓	–	✓	–	✓	–	–
<b>LioN-Classic</b>							
16 Digital IN	✓	–	–	✓	–	–	–
8 Digital OUT (2 A)	✓	–	–	✓	–	–	✓
16 Digital OUT (0.5 A)	✓	–	–	✓	–	–	✓
8 Digital IN/8 Digital OUT (0.5 A)	✓	–	–	✓	–	–	✓
<b>Accessories CANopen®</b>							
Cord sets, single-ended	✓	–	✓	✓	–	–	✓
Cord sets, double-ended	✓	–	✓	✓	–	–	✓
Field attachable connectors	✓	–	✓	✓	–	–	✓
T-connectors	✓	–	–	✓	–	–	✓



## CANopen® – Digital Inputs

## Technical Information

Product Description			
Type	0930 CSL 108	0930 CSL 109	0930 CSL 651
			
Description	LioN-Classic CANOpen® with 16 digital inputs (p-switching) to connect standard sensors, combined FIXCON®/M12 socket, 5-poles, rotary switches for addressing, M12 bus connection, 5-poles	LioN-Classic CANOpen® device with 16 digital inputs (n-switching) to connect standard sensors, combined FIXCON®/M12 socket, 5-poles, rotary switches for addressing, M12 bus connection, 5-poles	LioN-S CANOpen® device with 8 digital inputs to connect standard sensors, M8 socket, 3-poles, rotary switches for addressing, M12 bus connection, 5-poles
Technical Data			
Protection Class	IP67		
Environmental Temperature	0°C to +60°C		-10°C to +60°C
Weight	570 g		190 g
Bus System			
Transmission Rate	max. 1000 kBaud		max. 1 MBaud
Address Range	1 to 99		1 to 127
System/Sensors Power Supply			
Rated Voltage	24 V DC		
Voltage Range	11 to 30 V DC		
Power Consumption	max. 80 mA		60 mA
Input Power Supply			
Voltage Range	min. (U <sub>system</sub> – 1.5 V)		
Sensor Current	max. 800 mA		100 mA (at T <sub>amp</sub> +30°C)
Indicator	LED green		
Inputs	(Type 2 acc. to IEC 61131-2)		(Type 3 acc. to IEC 61131-2)
Rated Input Current	24 V DC		24 V DC
Number of Digital Channels	16		max. 8
Status Indicator	LED yellow per channel		LED yellow per channel
Diagnostic Indicator	–		LED red per channel
Included in Delivery			
M12 Dust Covers	2 pieces		
Attachable Labels	10 pieces		

## Bit Assignment 0930 CSL 108/109

Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	7B	7A	5B	5A	3B	3A	1B	1A
Byte 1	8B	8A	6B	6A	4B	4A	2B	2A
Diagnostic Input								
Byte 2	OVL	–	–	–	–	UVA	ASC	DIA

OVL: Overload status  
 UVA: Undervoltage actuator  
 ASC: Actuator short-circuit  
 DIA: Diagnostic

## Bit Assignment 0930 CSL 651

Bit	7	6	5	4	3	2	1	0
M8 Input								
Byte 0	8	7	6	5	4	3	2	1
Diagnostic								
Byte 1	0	0	0	0	0	SSC	0	SSUP
Byte 2	S8	S7	S6	S5	S4	S3	S2	S1









SSC: Sensor short-circuit  
 SSUP: Sensor underpower diagnostic  
 S1 to 8: Channel diagnostic 1 to 8





## CANopen® – Digital Outputs

## Technical Information

Product Description		
Type	0930 CSL 107	0930 CSL 114
	<div></div> <div></div>	<div></div> <div></div>
Description	LioN-Classic CANopen® device with 8 digital outputs (2 A) to connect standard actuators, combined FIXCON®/M12 socket, 5-poles, rotary switches for addressing, M12 bus connection, 5-poles, 7/8" actuator supply, 3-poles	LioN-Classic CANopen® device with 16 digital outputs (0.5 A) to connect standard actuators, combined FIXCON®/M12 socket, 5-poles, rotary switches for addressing, M12 bus connection, 5-poles, 7/8" actuator supply, 3-poles
Technical Data		
Protection Class	IP67	
Environmental Temperature	0°C to +60°C	
Weight	570 g	
Bus System		
Transmission Rate	max. 1000 kBaud	
Address Range	1 to 99	
System/Sensors Power Supply		
Rated Voltage	24 V DC	
Voltage Range	11 to 30 V DC	
Power Consumption	max. 80 mA	
Output Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Reverse Polarity Protection	yes	
Indicator	LED green	
Outputs	(Type 2 A acc. to IEC 61131-2)	(Type 0.5 A acc. to IEC 61131-2)
Rated Output Current	2 A per channel	0.7 A per channel
Short Circuit-proof	yes	
Max. Current Carrying Capacity	12 A per module	11.2 A per module
Number of Digital Channels	8	16
Status Indicator	LED yellow per channel	
Diagnostic Indicator	LED red per channel	
Included in Delivery		
M12 Dust Covers	2 pieces	
Attachable Labels	10 pieces	

## Bit Assignment 0930 CSL 107

Bit	7	6	5	4	3	2	1	0
Diagnostic Input								
Byte 0	–	–	–	–	–	UVA	ASC	DIA
M12 Output								
Byte 0	8	7	6	5	4	3	2	1

UVA: Undervoltage actuator  
 ASC: Actuator short-circuit  
 DIA: Diagnostic

## Bit Assignment 0930 CSL 114




Bit	7	6	5	4	3	2	1	0
Diagnostic Input								
Byte 0	–	–	–	–	–	UVA	ASC	DIA
M12 Output								
Byte 0	7B	7A	5B	5A	3B	3A	1B	1A
Byte 1	8B	8A	6B	6A	4B	4A	2B	2A

**Diagnostic Indication**


LED	Indicator	Condition
1...8 (only 0930 CSL 107)	Yellow Red	Channel status Actuator short circuit
1...8 A/B (only 0930 CSL 114)	Yellow Red	Channel status Actuator short circuit
Us	Green	Actuator supply active
UL	Green	Module electronic supply active
MS (Module status)	Green Green blinking  Red	PDO transfer with PLC No data communication, no connection to PLC the error setting is given to the outputs Invalid module address e.g. "0"
NS (Network status)	Green Green blinking Red blinking Red Red/green blinking Red fast blinking	Cyclic communication with PLC Searching for baudrate Warning bus connection Invalid bus connection No connection to PLC the error setting is given to the outputs Invalid module address e.g. "0"

The diagnostic message of the fieldbus is made at the CANopen™ modules of Lumberg Automation™ via an additional input byte, which is appended to the standard input process data. Depending on the module, the diagnosis is communicated module- or port-related. It is generated if its an overload, an actuator low voltage and an actuator short-circuit. In addition, corresponding LEDs simplify troubleshooting.


**Pin Assignment**

Bus Connection M12	Actuator Supply 7/8"	Output M12
 <p>1 = Drain 2 = +24 V<sup>1</sup> 3 = GND (0 V) 4 = CAN_H 5 = CAN_L</p>	 <p>1 = Earth 2 = +24 V 3 = GND (0 V)</p>	 <p><b>0930 CSL 107</b> 1 = n.c. 2 = n.c. 3 = GND (0 V) 4 = OUT 5 = Earth</p> <p><b>0930 CSL 114</b> 1 = n.c. 2 = OUT B 3 = GND (0 V) 4 = OUT A 5 = Earth</p>

1 = System/sensors

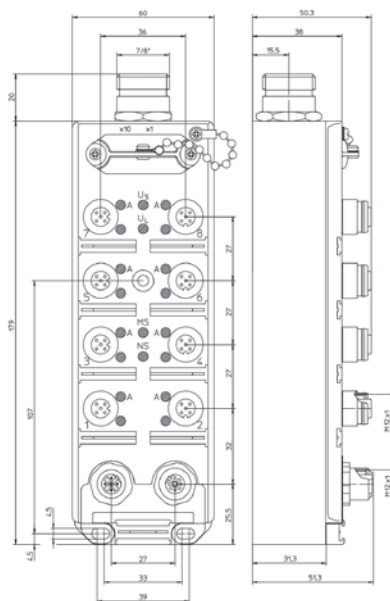

0930 CSL 107

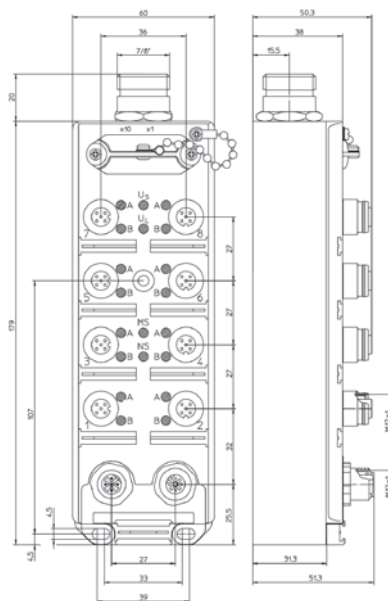



0930 CSL 114



## CANopen® – Digital In- and Output, Universal

## Technical Information

Product Description		
Type	0930 CSL 113	0930 CSL 650
	 	 
Description	LioN-Classic CANopen® device with 8 digital inputs to connect standard sensors and 8 digital outputs (0.5 A) to connect standard actuators, combined FIXCON®/M12 socket, 5-poles, rotary switches for addressing, M12 bus connection, 5-poles, 7/8" actuator supply, 3-poles	LioN-S CANopen® device with 8 digital I/O channels, channels can be used universally as inputs or outputs, M8 socket, 3-poles, rotary switches for addressing, M12 bus connection, 5-poles, M12 actuator supply, 5-poles
Technical Data		
Protection Class	IP67	
Environmental Temperature	0°C to +60°C	-10°C to +60°C
Weight	570 g	200 g
Bus System		
Transmission Rate	max. 1000 kBaud	max. 1 MBaud
Address Range	1 to 99	1 to 127
System/Sensors Power Supply		
Rated Voltage	24 V DC	
Voltage Range	11 to 30 V DC	
Power Consumption	max. 80 mA	60 mA
Input Power Supply		
Voltage Range	min. (U <sub>System</sub> – 1.5 V)	19 to 30 V DC
Sensor Current	max. 800 mA	100 mA (at T <sub>amp</sub> +30°C)
Indicator	LED green	
Inputs	(Type 2 acc. to IEC 61131-2)	(Type 3 acc. to IEC 61131-2)
Rated Input Current	24 V DC	24 V DC
Number of Digital Channels	8	max. 8
Status Indicator	LED green per channel	LED yellow per channel
Diagnostic Indicator	LED red per channel	LED red per channel
Output Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Reverse Polarity Protection	yes	yes/antiparallel diode
Indicator	LED green	
Outputs	(Type 0.5 A acc. to IEC 61131-2)	
Rated Output Current	0.7 A per channel	0.5 A per channel
Short Circuit-proof	yes	
Max. Current Carrying Capacity	5.6 A per module	4 A per module
Number of Digital Channels	8	max. 8
Status Indicator	LED yellow per channel	
Diagnostic Indicator	LED red per channel	
Included in Delivery		
M12 Dust Covers	2 pieces	
Attachable Labels	10 pieces	

## Bit Assignment 0930 CSL 113

Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
M12 Output								
Byte 0	8B	8A	6B	6A	4B	4A	2B	2A
Diagnostic Input								
Byte 1	OVL	–	–	–	–	UVA	ASC	DIA

OVL: Overload status • UVA: Undervoltage actuator  
 ASC: Actuator short-circuit  
 DIA: Diagnostic

## Bit Assignment 0930 CSL 650


Bit	7	6	5	4	3	2	1	0
M8 Input								
Byte 0	8	7	6	5	4	3	2	1
M8 Output								
Byte 0	8	7	6	5	4	3	2	1
Diagnostic								
Byte 1	0	0	0	0	ASC	SSC	0	SSUP
Byte 2	S8	S7	S6	S5	S4	S3	S2	S1

SSC: Sensor short-circuit  
 SSUP: Sensor underpower diagnostic  
 S1 to 8: Channel diagnostic 1 to 8

**Diagnostic Indication 0930 CSL 113**

LED	Indicator	Condition
1...8 A/B	Yellow	Channel status
2, 4, 6, 8 A/B	Red	Actuator short circuit
Us	Green	Sensor/actuator power supply active
UL	Green	Module electronic supply active
OVL	Red	Sensor short circuit
MS (Module status)	Green	PDO transfer with PLC
	Green blinking	No data communication, no connection to PLC the error setting is given to the outputs
	Red	Invalid module address e.g. "0"
NS (Network status)	Green	Cyclic communication with PLC
	Green blinking	Searching for baudrate
	Red blinking	Warning bus connection
	Red	Invalid bus connection
	Red/green blinking	No connection to PLC the error setting is given to the outputs
	Red fast blinking	Invalid module address e.g. "0"


The diagnostic message of the fieldbus is made at the CANopen™ modules of Lumberg Automation™ via an additional input byte, which is appended to the standard input process data. Depending on the module, the diagnosis is communicated module- or port-related. It is generated if its an overload, an actuator low voltage and an actuator short-circuit. In addition, corresponding LEDs simplify troubleshooting.

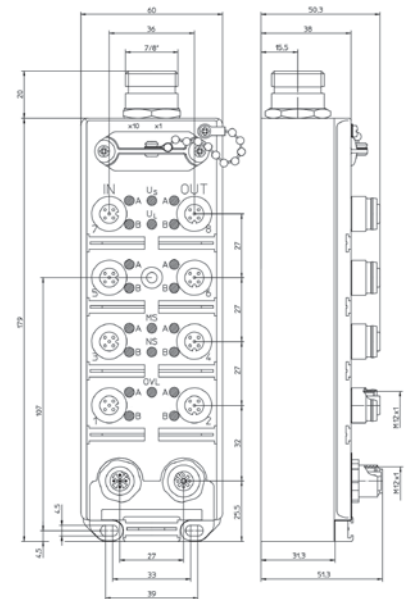

0930 CSL 113




**Diagnostic Indication 0930 CSL 650**

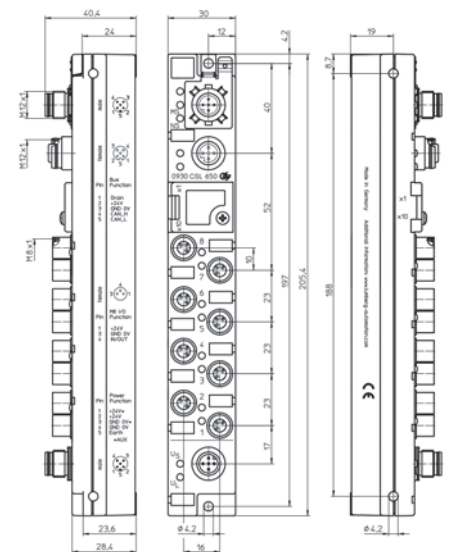LED	Indicator	Condition
1...8	Yellow Red	Channel status Periphery error
Us	Green	Sensor power supply active
UL	Green	Actuator power supply
MS (Module status)	Green Green blinking Red blinking Red/green blinking	Device is ready for operating 1 Hz CANopen® pre-operational, 2 Hz CANopen® STOP Recoverable fault, e.g. diagnostic CAN Reset
NS (Network status)	Green Green blinking Red/green blinking Red blinking Red	Online, communication with PLC 2 Hz searching for baudrate 1 Hz wrong configuration, e.g. cable length is oversized Time-out state of one or more I/O connections Failed communication device, Bus-off status, duplicate MAC-ID







0930 CSL 650

### Pin Assignment 0930 CSL 113

Bus Connection M12	Actuator Supply 7/8"	In-/Outputs M12												
 <p>1 = Drain 2 = +24 V<sup>1</sup> 3 = GND (0 V)<sup>1</sup> 4 = CAN_H 5 = CAN_L</p>	 <p>1 = Earth 2 = +24 V 3 = GND</p>	 <table><tr><th>IN</th><th>OUT</th></tr><tr><td>1 = +24 V</td><td>1 = n.c.</td></tr><tr><td>2 = IN B</td><td>2 = OUT B</td></tr><tr><td>3 = GND (0 V)</td><td>3 = GND (0 V)</td></tr><tr><td>4 = IN A</td><td>4 = OUT A</td></tr><tr><td>5 = Earth</td><td>5 = Earth</td></tr></table>	IN	OUT	1 = +24 V	1 = n.c.	2 = IN B	2 = OUT B	3 = GND (0 V)	3 = GND (0 V)	4 = IN A	4 = OUT A	5 = Earth	5 = Earth
IN	OUT													
1 = +24 V	1 = n.c.													
2 = IN B	2 = OUT B													
3 = GND (0 V)	3 = GND (0 V)													
4 = IN A	4 = OUT A													
5 = Earth	5 = Earth													

1 = System/sensors

## Pin Assignment 0930 CSL 650

Bus Connection M12	Actuator Supply M12	In-/Outputs M8
 <p>1 = Drain 2 = +24 V<sup>1</sup> 3 = GND (0 V)<sup>1</sup> 4 = CAN_H 5 = CAN_L</p>	 <p>1 = +24 V<sup>2</sup> 2 = +24 V<sup>3</sup> 3 = GND (0 V)<sup>2</sup> 4 = GND (0 V)<sup>3</sup> 5 = Earth</p>	 <p>1 = +24 V 3 = GND (0 V) 4 = IN/OUT</p>
 <p>Housing = Earth</p>		

1 = System: galvanically separated to sensors/actuators • 2 = Actuators • 3 = Sensors



The application of these products in harsh environments should always be checked before use.  
Technical modifications reserved.





# I/O Modules Active – Stand-Alone: Interbus®



**Be certain. Belden.**

## **Interbus® – a Fieldbus System**

Interbus® is an internationally used fieldbus system. Since the first presentation of the system in 1987 the Interbus® has been modified, updated and improved and has become integral in numerous applications in the area of Automation Technology.



## **Lumberg Automation™ Products**

To ensure the best application of the Interbus® in the decentralized sector, components must meet maximum electromechanical demands. The Lumberg Automation™ Interbus® components offer maximum protection for the electronic system due to the material used for the housing and the potting technology. The connection for Interbus® and the power supply of the module electronics, sensors as well as actuator system is implemented via M23 connectors. Bus terminals or TAPs are available for the connection to the bus.





Absolute protection  
of electronics, thanks  
to use of high-quality  
components

## General Technical Data

### Transmission medium

- Shielded twisted pair copper cable for differential signal transmission acc. to RS422 (RS485)
- Fiber optic cable
- Hybrid cable for the joint transmission of power supply and data with the installation remote bus

### Network topology

Physically, Interbus® is built as a ring. Due to special cabling systems (e.g. transmit and receive lines in one cable, special T-connectors) it resembles a tree structure.

### Partial systems in the Interbus®

- The Remote Bus (RBUS) has been designed for long distances. It connects the master with the first bus terminal and general remote bus participants with each other. A drop line from the remote bus is permitted and called a remote bus drop.
- The Installation Remote Bus is a variant of the remote bus. Apart from actual data lines the power supply for the module electronics and sensors is conducted in the Installation Remote Bus Cable.
- A Local Bus (LBUS) is a bus connection branching from the remote bus via a bus terminal and connecting the local bus participants with each other. Different variants of the local bus exist.

### Number of devices

- Maximum 254 remote bus participants
- Total of 512 participants with max. 4096 I/O points

### Configuration of devices


Projectioning does not require module-specific data, because the basic data are saved in the module. The relevant libraries can be used for a detailed or offline projectioning. The libraries for the Lumberg Automation™ modules can be downloaded from [www.lumberg-automation.com/downloads](http://www.lumberg-automation.com/downloads).

### Admissible transmission rates and line lengths

- Transmission rate: 500 kBit/s
- Overall remote bus length: 12.8 km
- Maximum distance between remote bus participants: 400 m
- Length of the installation remote bus: 50 m
- Distance between installation remote bus participants: 50 m
- Admissible current load of the installation remote bus: 4.5 A

### Addressing

Modules are addressed automatically during the start-up of the bus depending on the physical position of the participants in the bus.



## Matrix Interbus®

Function	Slots Bus Type		Slots I/O Type		Slots Power Type		
	M12	M23	M8	M12	M12	M23	7/8"

### Interbus®

LioN-Classic							
8 Digital IN	–	✓	–	✓	–	✓	–
16 Digital IN	–	✓	–	✓	–	–	–
8 Digital OUT (2 A)	–	✓	–	✓	–	✓	–
8 Digital IN/4 Digital OUT (2 A)	–	✓	–	✓	–	✓	–




### Accessories Interbus®

Cord sets, single-ended	–	✓	–	✓	–	✓	–
Cord sets, double-ended	–	✓	–	✓	–	✓	–
Field attachable connectors	–	✓	–	✓	–	✓	–
T-connectors	–	–	–	✓	–	✓	–



## Interbus® – Digital Inputs






### Technical Information

Product Description			
Type	0950 ISL 205	0950 ISL 202	0950 ISL 204
			
Description	LioN-Classic Interbus® device, remote bus terminal with integrated branch for an installation remote bus, 8 digital inputs to connect standard sensors, combined FIXCON®/M12 socket, 5-poles, M23 bus connection, 9-poles, M23 power supply, 6-poles	LioN-Classic Interbus® device, installation remote bus with 8 digital inputs to connect standard sensors, combined FIXCON®/M12 socket, 5-poles, M23 bus connection, 9-poles	LioN-Classic Interbus® device, installation remote bus with 16 digital inputs to connect standard sensors, combined FIXCON®/M12 socket, 5-poles, M23 bus connection, 9-poles
Technical Data			
Protection Class	IP67		
Environmental Temperature	0°C to +60°C		
Weight	580 g	500 g	
Bus System			
ID Number	11 dec	10 dec	02 dec
System/Sensors Power Supply			
Rated Voltage	24 V DC		
Voltage Range	19 to 30 V DC		
Power Consumption	typ. 120 mA		
Input Power Supply			
Voltage Range	min. (UL – 1.5 V)		
Sensor Current	max. 800 mA		
Indicator	LED green		
Inputs (Type 2 acc. to IEC 61131-2)			
Rated Input Current	24 V DC		
Number of Digital Channels	16		
Channel Type N.O.	p-switching		
Status Indicator	LED yellow per channel		
Included in Delivery			
M12 Dust Covers	2 pieces		
Attachable Labels	10 pieces		

### Diagnostic Indication




LED	Indicator	Condition
1...8	Yellow	Channel status
1...8 A/B (only 0950 ISL 204)	Yellow	Channel status
ERR (only 0950 ISL 205)	Red	Installation remote bus defective
Us (only 0950 ISL 202/204)	Green	Sensor supply active
UL	Green	Module electronic supply active
BA	Green	Bus active
RC	Green	Remote bus-in connected
RD	Red	Continuing remote bus disconnected
LD (only 0950 ISL 205)	Red	Installation field bus disconnected
OVL	Red	Sensor short circuit/sensor overload


**Pin Assignment 0950 ISL 205**

Bus Connection Input M23	Bus Connection Output M23	Inst. Remote Bus Output M23
 <ul style="list-style-type: none"> <li>1 = DO</li> <li>2 = DO</li> <li>3 = DI</li> <li>4 = DI</li> <li>5 = COM</li> <li>6 = n.c.</li> <li>7 = n.c.</li> <li>8 = n.c.</li> <li>9 = n.c.</li> </ul> <p>Housing = Earth</p>	 <ul style="list-style-type: none"> <li>1 = DO</li> <li>2 = DO</li> <li>3 = DI</li> <li>4 = DI</li> <li>5 = COM</li> <li>6 = n.c.</li> <li>7 = n.c.</li> <li>8 = n.c.</li> <li>9 = LBST</li> </ul> <p>Housing = Earth</p>	 <ul style="list-style-type: none"> <li>1 = DO</li> <li>2 = DO</li> <li>3 = DI</li> <li>4 = DI</li> <li>5 = COM</li> <li>6 = Earth</li> <li>7 = +24 V</li> <li>8 = GND (0 V)</li> <li>9 = RBST</li> </ul> <p>Housing = Earth</p>
Power Supply M23	Input M12	
 <ul style="list-style-type: none"> <li>1 = Earth</li> <li>2 = +24 V<sup>1</sup></li> <li>3 = GND (0 V)<sup>1</sup></li> <li>4 = +24 V<sup>2</sup></li> <li>5 = GND (0 V)<sup>2</sup></li> <li>6 = n.c.</li> </ul>	 <ul style="list-style-type: none"> <li>1 = +24 V</li> <li>2 = n.c.</li> <li>3 = GND (0 V)</li> <li>4 = IN</li> <li>5 = Earth</li> </ul>	


1 = Installation remote bus • 2 = Module supply/sensors

**Pin Assignment 0950 ISL 202/204**


Bus Connection Input M23	Bus Connection Output M23	Input M12	
 <ul style="list-style-type: none"> <li>1 = DO</li> <li>2 = DO</li> <li>3 = DI</li> <li>4 = DI</li> <li>5 = COM</li> <li>6 = Earth</li> <li>7 = +24 V</li> <li>8 = GND (0 V)</li> <li>9 = n.c.</li> </ul> <p>Housing = Earth</p>	 <ul style="list-style-type: none"> <li>1 = DO</li> <li>2 = DO</li> <li>3 = DI</li> <li>4 = DI</li> <li>5 = COM</li> <li>6 = Earth</li> <li>7 = +24 V</li> <li>8 = GND (0 V)</li> <li>9 = RBST</li> </ul> <p>Housing = Earth</p>		<b>0950 ISL 202</b> <ul style="list-style-type: none"> <li>1 = +24 V</li> <li>2 = n.c.</li> <li>3 = GND (0 V)</li> <li>4 = IN</li> <li>5 = Earth</li> </ul>
			<b>0950 ISL 204</b> <ul style="list-style-type: none"> <li>1 = +24 V</li> <li>2 = IN B</li> <li>3 = GND (0 V)</li> <li>4 = IN A</li> <li>5 = Earth</li> </ul>

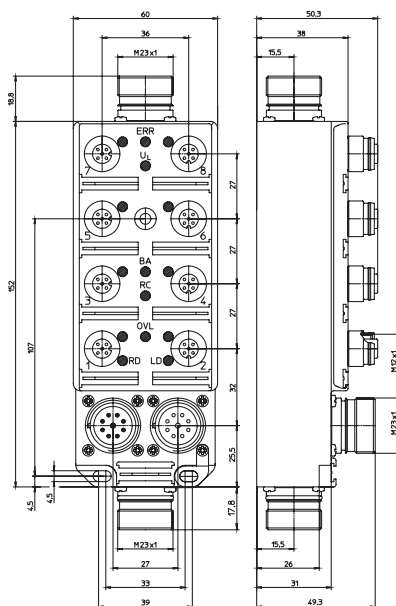

0950 ISL 205

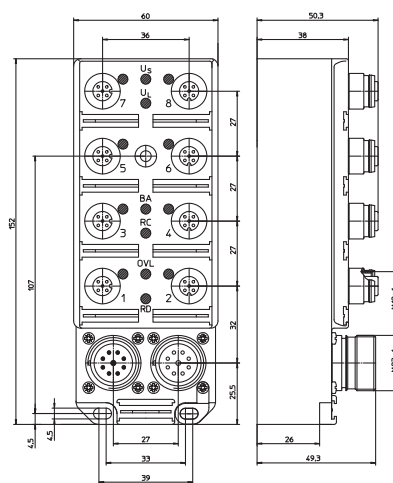



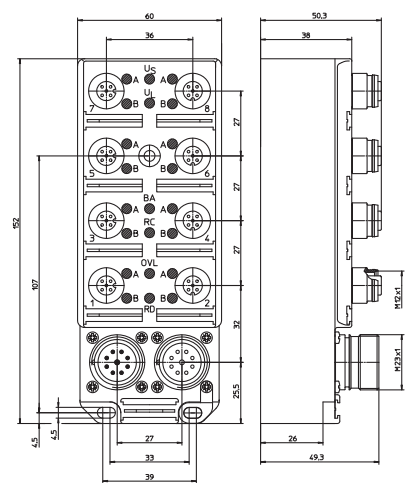

0950 ISL 202



0950 ISL 204

## Interbus® – Digital Outputs

### Technical Information

Product Description		
Type	0950 ISL 201	0950 ISL 207
	 	 
Description	LioN-Classic Interbus® device, installation remote bus with 8 digital outputs to connect standard actuators, combined FIXCON®/M12 socket, 5-poles, M23 bus connection, 9-poles, M23 power supply, 6-poles	LioN-Classic Interbus® device, installation remote bus with 8 digital outputs (2 A) to connect standard actuators, without actuator low voltage report, combined FIXCON®/M12 socket, 5-poles, M23 bus connection, 9-poles, M23 power supply, 6-poles
Technical Data		
Protection Class	IP67	
Environmental Temperature	0°C to +60°C	
Weight	580 g	
Bus System		
ID Number	09 dec	01 dec
System/Sensors Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Power Consumption	typ. 70 mA	
Output Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Indicator	LED green	
Outputs (Type 2 A acc. to IEC 61131-2)		
Rated Output Current	2 A per channel	
Short Circuit-proof	yes	
Max. Current Carrying Capacity	15 A per module	
Number of Digital Channels	8	
Channel Type N.O.	p-switching	
Status Indicator	LED yellow per channel	
Diagnostic Indicator	LED red per channel	
Included in Delivery		
M12 Dust Covers	2 pieces	
Attachable Labels	10 pieces	

### Diagnostic Indication

LED	Indicator	Condition
1...8 A	Yellow	Channel status
1...8	Red	Actuator short-circuit/actuator overload
Us	Green	Actuator supply active
UL	Green	Module electronic supply active
BA	Green	Bus active
RC	Green	Remote bus-in connected
RD	Red	Continuing remote bus disconnected

## Pin Assignment

### Bus Connection Input M23



- 1 = DO  
2 = DO  
3 = DI  
4 = DI  
5 = COM  
6 = Earth  
7 = +24 V  
8 = GND (0 V)  
9 = n.c.

Housing = Earth

### Bus Connection Output M23



- 1 = D0  
2 = D0  
3 = D1  
4 = D1  
5 = COM  
6 = Earth  
7 = +24 V  
8 = GND (0 V)  
9 = RBST

Housing = Earth

## Power Supply M23




- 1 = Earth  
2 = +24 V  
3 = GND (0 V)  
4 = n.c.  
5 = n.c.  
6 = n.c.

## Output M12



- 1 = n.c.  
2 = n.c.  
3 = GND (0 V)  
4 = OUT  
5 = Earth

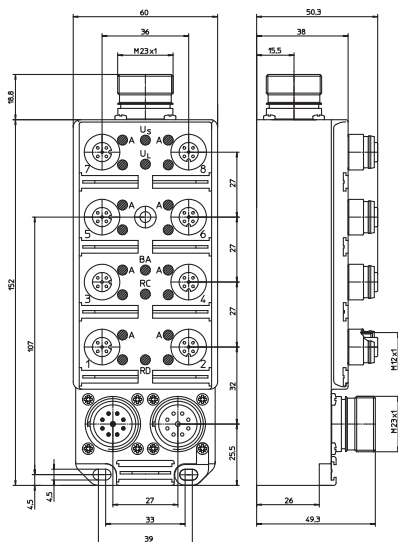





0950 ISL 201 | 0950 ISL 207



## Interbus® – Digital In- and Outputs

### Technical Information

Product Description		
Type	0950 ISL 203	0950 ISL 209
	 	 
Description	LioN-Classic Interbus® device, installation remote bus with 8 digital inputs to connect standard sensors and 4 digital outputs (2 A) to connect standard actuators, combined FIXCON®/M12 socket, 5-poles, M23 bus connection, 9-poles, M23 power supply, 6-poles, with potential separation	LioN-Classic Interbus® device, installation remote bus with 8 digital inputs to connect standard sensors and 4 digital outputs (2 A) to connect standard actuators, without actuator low voltage report, combined FIXCON®/M12 socket, 5-poles, M23 bus connection, 9-poles, M23 power supply, 6-poles
Technical Data		
Protection Class	IP67	
Environmental Temperature	0°C to +60°C	
Weight	580 g	
Bus System		
ID Number	35 dec	03 dec
System/Sensors Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Power Consumption	typ. 80 mA	
Input Power Supply		
Voltage Range	min. (UL – 1.5 V)	
Sensor Current	max. 800 mA	
Indicator	LED green	
Inputs		
Rated Input Current	24 V DC	
Number of Digital Channels	8	
Channel Type N.O.	p-switching	
Status Indicator	LED yellow per channel	
Output Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Indicator	LED green	
Outputs (Type 0.5 A acc. to IEC 61131-2)		
Rated Output Current	2 A per channel	
Short Circuit-proof	yes	
Max. Current Carrying Capacity	4 A per module	
Number of Digital Channels	4	
Channel Type N.O.	p-switching	
Status Indicator	LED yellow per channel	
Diagnostic Indicator	LED red per channel	
Included in Delivery		
M12 Dust Covers	2 pieces	
Attachable Labels	10 pieces	

### Diagnostic Indication

LED	Indicator	Condition
1, 3, 5, 7 A/B	Yellow	Channel status
2, 4, 6, 8 A	Yellow	Channel status
2, 4, 6, 8	Red	Actuator short-circuit/actuator overload
Us	Green	Actuator supply active
UL	Green	Module electronic supply active
BA	Green	Bus active
RC	Green	Remote bus-in connected
RD	Red	Continuing remote bus disconnected
OVL	Red	Sensor short circuit/sensor overload



## Pin Assignment

## Bus Connection Input M23



- 1 = DO  
2 = DO  
3 = DI  
4 = DI  
5 = COM  
6 = Earth  
7 = +24 V  
8 = GND (0 V)  
9 = n.c.

Housing = Earth

### Bus Connection Output M23



- 1 = D0  
2 = D0  
3 = D1  
4 = D1  
5 = COM  
6 = Earth  
7 = +24 V  
8 = GND (0 V)  
9 = RBST

Housing = Earth

## Power Supply M23




- 1 = Earth  
2 = +24 V  
3 = GND (0 V)  
4 = n.c.  
5 = n.c.  
6 = n.c.

## In-/Output M12



- | IN            | OUT           |
|---------------|---------------|
| 1 = +24 V     | 1 = n.c.      |
| 2 = IN B      | 2 = n.c.      |
| 3 = GND (0 V) | 3 = GND (0 V) |
| 4 = IN A      | 4 = OUT       |
| 5 = Earth     | 5 = Earth     |

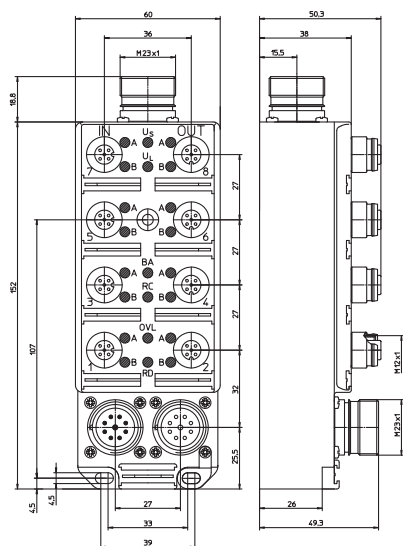

0950 ISL 203 | 0950 ISL 209







# I/O Modules Active – Stand-Alone: AS-Interface



**Be certain. Belden.**

## **Actuator Sensor-Interface (AS-Interface)**



AS-Interface was designed as a simple system for the quick data exchange of binary signals. An international standard since 1999, in accordance with EN 50295 and IEC 62026-2.

### **Quick and Uncomplicated**

The biggest advantage of AS-Interface is the quick and uncomplicated installation of the system. Communication (Manchester Encoding) and energy are transmitted via a 2-wire cable. By using piercing technology for contacting the cable it is possible to insert a new slave at any point in the system. In addition, the arbitrary structure of the bus (line, tree, star, ...) permits the perfect adaptation to the plant or machine. AS-Interface is mainly used for small machines, as a subsystem for more complex bus systems (e.g. PROFIBUS-DP) or as an easy introduction to bus technology.



Cost-efficient and innovative components for demanding actuator/sensor networks

## General Technical Data

### Transmission medium

- Unshielded 2-wire cable for power supply (module electronics and sensors) and data transmission (Manchester Encoding)
- Optional mechanically encoded flat or round cable

### Network topology

The bus can be built arbitrarily (line, star, tree, ...). Terminating resistors are not required.

### Number of devices

- 31 slaves by using standard slaves
- 62 slaves by using A/B slaves with profile 3.0

### Configuration of devices

No module-specific data is required for configuration, since the basic data is contained in the module. Appropriate libraries can be used for detailed or offline configuration. The libraries for Lumberg Automation™ modules can be downloaded from [www.lumberg-automation.com/downloads](http://www.lumberg-automation.com/downloads).

### Reliable transmission rates and segment lengths

- Transmission rate: 167 kBaud
- Max. segment length: 100 m

### Addressing

AS-Interface slaves are generally addressed via software (the default address is generally "0" for all AS-Interface slaves).


This can be done in several ways:

- Via the master: The slaves are connected to the master consecutively. The latter automatically identifies the kind of slave and builds up a communication. Then the slave can be addressed.
- Via an addressing unit: All AS-Interface slaves can be addressed with the standard addressing unit "0913 ATL 003".
- Automatic addressing: If a slave in a network fails, AS-Interface offers the chance of auto-addressing. The defective slave is replaced by an identical one. The master identifies this slave and automatically addresses it to the address of the missing slave.







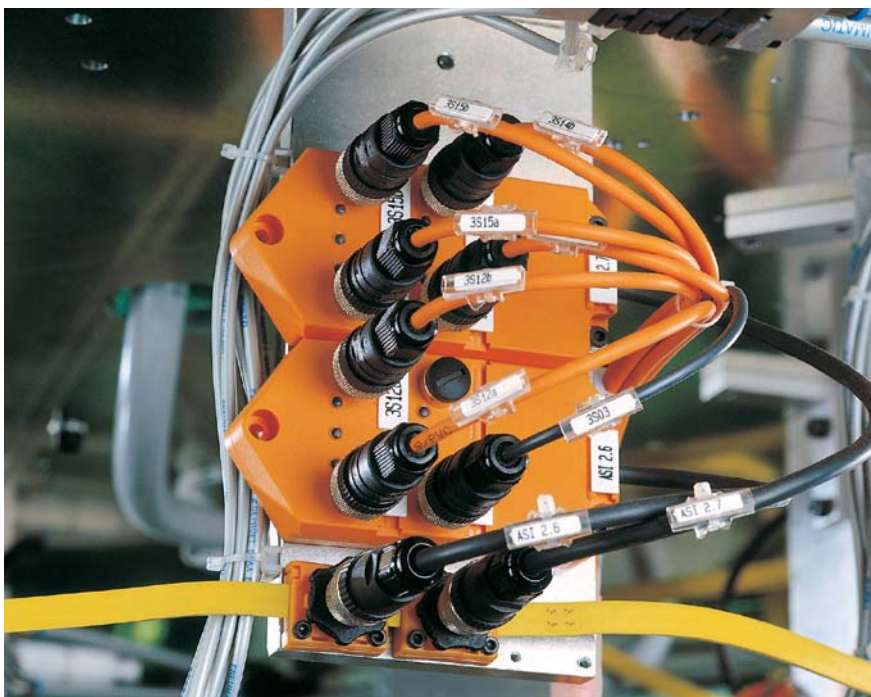

## Matrix AS-Interface

Function	Slots Bus Type			Slots I/O Type	
	M8	M12	Flat Cable	M8	M12
<b>AS-Interface</b>					
<b>LioN-Classic</b>					
4 Digital IN	✓	–	✓	✓	✓
8 Digital IN	–	–	✓	–	✓
4 Digital OUT (2 A)	–	–	✓	–	✓
2 Digital IN/2 Digital OUT (2 A)	–	–	✓	–	✓
4 Digital IN/4 Digital OUT (2 A)	–	✓	✓	–	✓
<b>Accessories AS-Interface</b>					
Cord sets, single-ended	✓	✓	–	✓	✓
Cord sets, double-ended	✓	✓	–	✓	✓
Field attachable connectors	✓	✓	–	✓	✓
T-connectors	–	✓	–	✓	✓



## AS-Interface – Digital Inputs

### Technical Information

Product Description			
Type	0910 ASL 501	0910 ASL 409	0910 ASL 412
	<div></div> <div></div>	<div></div> <div></div>	<div></div> <div></div>
Description	LioN-Classic AS-Interface module with 4 digital inputs to connect M8 standard sensors, M8 bus connection	LioN-Classic AS-Interface flat cable module with 4 digital inputs to connect standard sensors, combined FIXCON®/M12 socket, infrared interface for the addressing	LioN-Classic AS-Interface flat cable module with 8 digital inputs to connect standard sensors, combined FIXCON®/M12 socket, infrared interface for the addressing
Note	–	The input channels are connected together. That allows a greater connection flexibility (see pin assignment). In case of connection of a two-channel sensor to input socket 1 or 3 a further sensor must not be plugged to input socket 2 or 4 respectively due to the Y wiring of the inputs.	
Technical Data			
Protection Class	IP67		
Environmental Temperature	-15°C to +60°C	-25°C to +60°C	-15°C to +60°C
Weight	100 g	200 g	300 g
Bus System			
AS-Interface Profile	S.O.A.E		
Support A/B Addressing	yes		
System/Sensors Power Supply			
Rated Voltage	AS-Interface net		
Voltage Range	26.5 to 31.6 V DC		
Power Consumption	max. 120 mA		
Input Power Supply			
Voltage Range	AS-Interface net 17 to 30 V DC		
Sensor Current	max. 100 mA		
Indicator	LED green		
Inputs (Type 2 acc. to IEC 61131-2)			
Rated Input Current	24 V DC		
Number of Digital Channels	4	8	
Status Indicator	LED yellow per channel		
Diagnostic Indicator	LED red		
Included in Delivery			
M12 Dust Covers	2 pieces		
Attachable Labels	10 pieces		

#### Bit Assignment 0910 ASL 501

Bit	–	–	–	–	3	2	1	0
M12 Input								
Byte 0	–	–	–	–	I-4	I-3	I-2	I-1

#### Bit Assignment 0910 ASL 409

Bit	–	–	–	–	3	2	1	0
M12 Input								
Byte 0	–	–	–	–	I-4	I-3/4	I-2	I-1/2

#### Bit Assignment 0910 ASL 412

Bit	–	–	–	–	3	2	1	0
M12 Input								
Byte 0/Slave 1	–	–	–	–	I-4	I-3	I-2	I-1
Byte 1/Slave 2	–	–	–	–	I-4	I-3	I-2	I-1

According to the AS-Interface specification 3.0, periphery errors like short circuits or overloads can be sent to the master in the form of a collective diagnosis. In addition, there is a status LED on the relevant slave.



### Diagnostic Indication 0910 ASL 501

LED	Indicator	Condition
1...4	Yellow	Channel status
AS-i-Dia	Green	Slave is involved in data transfer
	Red	communications error, no data transfer (e.g. slave address 0)
	Red blinking	Periphery error (e.g. sensor supply overload or short circuit)


### Diagnostic Indication 0910 ASL 409/412

LED	Indicator	Condition
I-1...4	Yellow	Channel status
U-AS-i	Green	AS-Interface power supply active
FID	Red	Communication error
	Red blinking	Periphery error (sensor/actuator short circuit)


### Pin Assignment 0910 ASL 501

Bus Connection M8	Input M8
 <p>1 = AS-Interface + 3 = AS-Interface - 4 = n.c.</p>	 <p>1 = +24 V 4 = GND (0 V) 3 = IN</p>


### Pin Assignment 0910 ASL 409/412

Input M12	Input 1	Input 2	Input 3	Input 4
	<p>1 = +24 V 2 = IN 2 3 = GND (0 V) 4 = IN 1 5 = Earth</p>	<p>1 = +24 V 2 = n.c. 3 = GND (0 V) 4 = IN 2 5 = Earth</p>	<p>1 = +24 V 2 = n.c. 3 = GND (0 V) 4 = IN 3 5 = Earth</p>	<p>1 = +24 V 2 = n.c. 3 = GND (0 V) 4 = IN 3 5 = Earth</p>


The connection to earth for the inputs is implemented via the earthing contacts at the fastening holes.

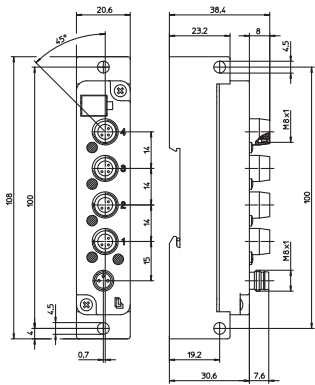

0910 ASL 501

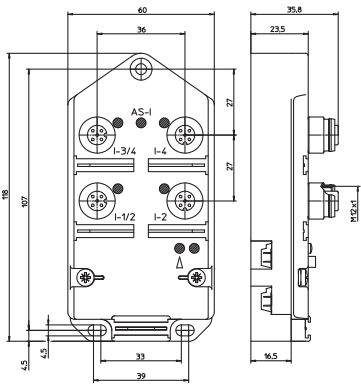

0910 ASL 409

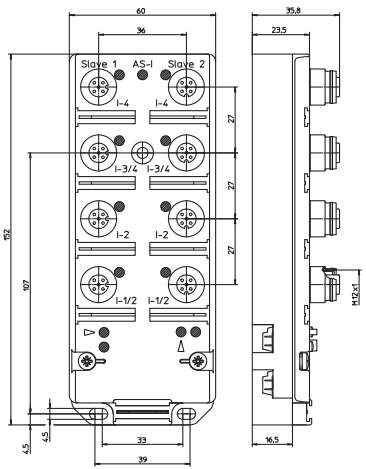






0910 ASL 412



## AS-Interface – Digital Outputs

### Technical Information

Product Description	
Type	0910 ASL 403
	    
Description	LioN-Classic AS-Interface flat cable module with 4 digital outputs (p-switching) to connect standard actuators, 4 x M12 socket
Technical Data	
Protection Class	IP67
Environmental Temperature	-25°C to +80°C
Weight	200 g
Bus System	
AS-Interface Profile	8.0
Support A/B Addressing	no
System/Sensors Power Supply	
Rated Voltage	AS-Interface net
Voltage Range	26.5 to 31.6 V DC
Power Consumption	max. 75 mA
Output Power Supply (AUX)	
Rated Voltage	24 V DC
Voltage Range	10 to 30 V DC
Reverse Polarity Protection	yes
Indicator	LED green
Outputs (Type 2 A acc. to IEC 61131-2)	
Rated Output Current	2 A per channel
Short Circuit-proof	yes
Max. Current Carrying Capacity	4 A per module
Number of Digital Channels	4
Status Indicator	LED yellow per channel
Included in Delivery	
M12 Dust Covers	2 pieces
Attachable Labels	10 pieces

### Bit Assignment



Bit	-	-	-	-	3	2	1	0
M12 Output								
Byte 0	-	-	-	-	0-4	0-3	0-2	0-1

Diagnostic Indication

LED	Indicator	Condition
O-1...4	Yellow	Channel status
U-AS-i	Green	AS-Interface power supply active
AUX	Green	Actuator supply active

Pin Assignment

Output M12

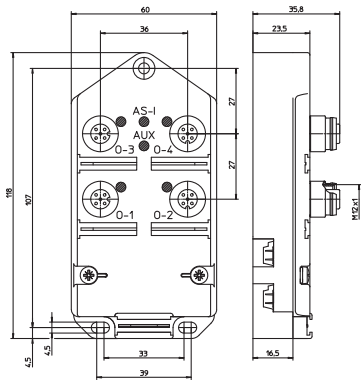
















0910 ASL 403



## AS-Interface – Digital In- and Outputs

### Technical Information

Product Description			
Type	0910 ASL 410	0910 ASL 408	0910 ASL 438
	<div></div> 	<div></div> 	<div></div> 
Description	LioN-Classic AS-Interface flat cable module with 2 digital inputs to connect standard sensors and 2 digital outputs to connect standard actuators, combined FIXCON®/M12 socket, infrared interface for the addressing	LioN-Classic AS-Interface flat cable module with 4 digital inputs to connect standard sensors and 4 digital outputs to connect standard actuators, combined FIXCON®/M12 socket, infrared interface for the addressing	LioN-Classic AS-Interface flat cable module with 4 digital inputs for 2-wire or 3-wire sensors and 4 digital outputs to connect standard actuators, M12 socket, infrared interface for the addressing
Note	The input channels are connected together. That allows a greater connection flexibility (see pin assignment). In case of connection of a two-channel sensor to input socket 1 a further sensor must not be plugged to input socket 2 respectively due to the Y wiring of the inputs.	The input channels are connected together. That allows a greater connection flexibility (see pin assignment). In case of connection of a two-channel sensor to input socket 1 or 3 a further sensor must not be plugged to input socket 2 or 4 respectively due to the Y wiring of the inputs.	This module corresponds to the AS-i specification 3.0 and can only be operated on a master server, which is also 3.0. The input and output channels are connected together. That allows a greater connection flexibility (see pin assignment). In case of connection of a two-channel sensor/actuator to input/output socket 1 or 3 a further sensor/actuator must not be plugged to input/output socket 2 or 4 respectively due to the Y wiring of the inputs/outputs.
Technical Data			
Protection Class	IP67		
Environmental Temperature	-25°C to +60°C		-25°C to +80°C
Weight	200 g		300 g
Bus System			
AS-Interface Profile	S -3.F. E	S-.F.E	S-7.A.7
Support A/B Addressing	no		yes
System/Sensors Power Supply			
Rated Voltage	AS-Interface net		
Voltage Range	26.5 to 31.6 V DC		
Power Consumption	max. 250 mA		
Input Power Supply			
Voltage Range	24 V DC		
Sensor Current	10 to 30 V DC		
Indicator	LED green		
Inputs (Type 2 acc. to IEC 61131-2)			
Rated Input Current	24 V DC		
Number of Digital Channels	2		
Status Indicator	LED green per channel		
Output Power Supply (AUX)			
Rated Voltage	24 V DC		
Voltage Range	10 to 30 V DC		
Reverse Polarity Protection	yes		
Indicator	LED green		
Outputs (Type 2 A acc. to IEC 61131-2)			
Rated Output Current	2 A per channel		
Short Circuit-proof	yes		
Max. Current Carrying Capacity	4 A per module		
Number of Digital Channels	2		
Status Indicator	LED yellow per channel		
Diagnostic Indicator	LED red		
Included in Delivery			
M12 Dust Covers	2 pieces		
Attachable Labels	10 pieces		

**Bit Assignment 0910 ASL 408**

Bit	7	6	5	4	3	2	1	0
<b>M12 Input</b>								
Byte 0	–	–	–	–	1-4	1-3/4	1-2	1-1/2
<b>M12 Output</b>								
Byte 0	–	–	–	–	0-4	0-3	0-2	0-1

**Bit Assignment 0910 ASL 410**

Bit	7	6	5	4	3	2	1	0
<b>M12 Input</b>								
Byte 0	–	–	–	–	–	–	1-2	1-1/2
<b>M12 Output</b>								
Byte 0	–	–	–	–	0-4	0-3	–	–

**Bit Assignment 0910 ASL 438**



Bit	7	6	5	4	3	2	1	0
<b>M12 Input</b>								
Byte 0	–	–	–	–	1-4	1-3/4	1-2	1-1/2
<b>M12 Output</b>								
Byte 0	–	–	–	–	0-4	0-3/4	0-2	0-1/2

**Diagnostic Indication**



LED	Indicator	Condition
I-1..2/O-3..4 (only 0910 ASL 410)	Yellow	Channel status
I-1..4/O-1..4 (only 0910 ASL 408/438)	Yellow	Channel status
U-AS-i	Green	AS-Interface power supply active
AUX	Green	Actuator supply active
FID	Red	Communication error
	Red blinking	Periphery error (sensor/actuator short circuit)

Periphery errors like short circuits or overloads can be sent to the master in the form of a collective diagnosis. In addition, there is a status LED on the relevant slave.




**Pin Assignment 0910 ASL 410**


Input M12		Output M12	
	<b>Input 1</b> 1 = +24 V 2 = IN 2 3 = GND (0 V) 4 = IN 1 5 = Earth		<b>Output 1</b> 1 = n.c. 2 = n.c. 3 = GND (0 V) 4 = OUT 3 5 = Earth
	<b>Input 2</b> 1 = +24 V 2 = n.c. 3 = GND (0 V) 4 = IN 2 5 = Earth		<b>Output 2</b> 1 = n.c. 2 = n.c. 3 = GND (0 V) 4 = OUT 4 5 = Earth

**Pin Assignment 0910 ASL 408**


Input M12		Output M12	
	<b>Input 1</b> 1 = +24 V 2 = IN 2 3 = GND (0 V) 4 = IN 1 5 = Earth		<b>Output 1</b> 1 = n.c. 2 = n.c. 3 = GND (0 V) 4 = OUT 1 5 = Earth
	<b>Input 2</b> 1 = +24 V 2 = n.c. 3 = GND (0 V) 4 = IN 2 5 = Earth		<b>Output 2</b> 1 = n.c. 2 = n.c. 3 = GND (0 V) 4 = OUT 2 5 = Earth
	<b>Input 3</b> 1 = +24 V 2 = IN 4 3 = GND (0 V) 4 = IN 3 5 = Earth		<b>Output 3</b> 1 = n.c. 2 = n.c. 3 = GND (0 V) 4 = OUT 3 5 = Earth
	<b>Input 4</b> 1 = +24 V 2 = n.c. 3 = GND (0 V) 4 = IN 4 5 = Earth		<b>Output 4</b> 1 = n.c. 2 = n.c. 3 = GND (0 V) 4 = OUT 4 5 = Earth

**Pin Assignment 0910 ASL 438**


AUX	Input M12		Output M12	
		<b>Input 1</b> 1 = +24 V 2 = IN 2 3 = GND (0 V) 4 = IN 1 5 = Earth		<b>Output 1</b> 1 = n.c. 2 = OUT 2 3 = GND (0 V) 4 = OUT 1 5 = Earth
	<b>Input 2</b> 1 = +24 V 2 = n.c. 3 = GND (0 V) 4 = IN 2 5 = Earth		<b>Output 2</b> 1 = n.c. 2 = n.c. 3 = GND (0 V) 4 = OUT 2 5 = Earth	
	<b>Input 3</b> 1 = +24 V 2 = IN 4 3 = GND (0 V) 4 = IN 3 5 = Earth		<b>Output 3</b> 1 = n.c. 2 = OUT 4 3 = GND (0 V) 4 = OUT 3 5 = Earth	
	<b>Input 4</b> 1 = +24 V 2 = n.c. 3 = GND (0 V) 4 = IN 4 5 = Earth		<b>Output 4</b> 1 = n.c. 2 = n.c. 3 = GND (0 V) 4 = OUT 4 5 = Earth	

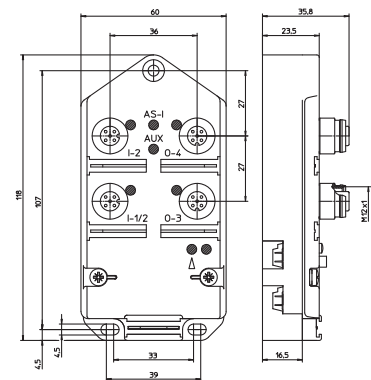

0910 ASL 410

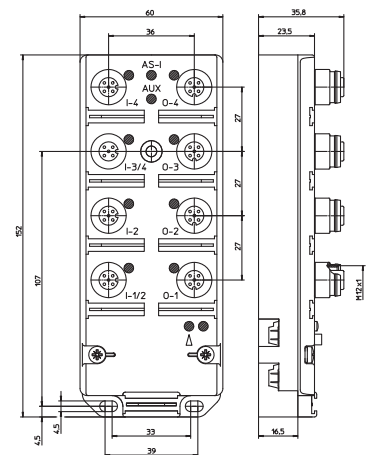



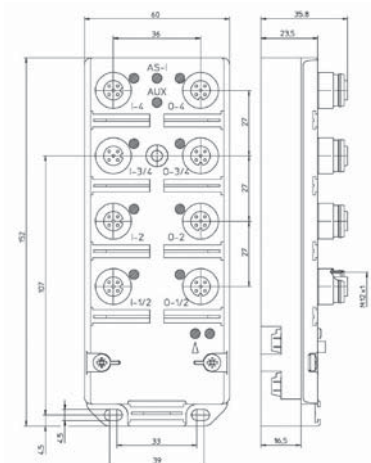








0910 ASL 408



0910 ASL 438

## AS-Interface – Digital In- and Outputs

### Technical Information

Product Description		
Type	0910 ASL 146	0910 ASL 425
	<div></div>	<div></div>
Description	LioN-Classic AS-Interface flat cable module with M12 bus connection and 4 digital inputs for 2-wire or 3-wire sensors and 4 digital outputs to connect standard actuators, M12 socket	LioN-Classic AS-Interface module with housing and receptacle shells in stainless steel, 4 digital inputs to connect standard sensors and 4 digital outputs (2 A) to connect standard actuators, M12 bus connection
Note	This module corresponds to the AS-i specification 3.0 and can only be operated on a master server, which is also 3.0. The input and output channels are connected together. That allows a greater connection flexibility (see pin assignment). In case of connection of a two-channel sensor/actuator to input/output socket 1 or 3 a further sensor/actuator must not be plugged to input/output socket 2 or 4 respectively due to the Y wiring of the inputs/outputs.	Especially designed for food and beverage equipment.
Technical Data		
Protection Class	IP67	
Environmental Temperature	-25°C to +80°C	
Weight	300 g	550 g
Bus System		
AS-Interface Profile	S-7.A.7	
Support A/B Addressing	yes	
System/Sensors Power Supply		
Rated Voltage	AS-Interface net	
Voltage Range	26.5 to 31.6 V DC	
Power Consumption	max. 250 mA	
Input Power Supply		
Voltage Range	24 V DC	17 to 30 V
Sensor Current	10 to 30 V DC	
Indicator	LED green	
Inputs (Type 2 acc. to IEC 61131-2)		
Rated Input Current	24 V DC	
Number of Digital Channels	4	
Channel Type N.O.	p-switching	
Status Indicator	LED green per channel	
Output Power Supply (AUX)		
Rated Voltage	24 V DC	
Voltage Range	10 to 30 V DC	
Reverse Polarity Protection	yes	
Indicator	LED green	
Outputs (Type 2 A acc. to IEC 61131-2)		
Rated Output Current	2 A per channel	
Short Circuit-proof	yes	
Max. Current Carrying Capacity	4 A per module	
Number of Digital Channels	4	
Status Indicator	LED yellow per channel	
Diagnostic Indicator	LED red	
Included in Delivery		
M12 Dust Covers	2 pieces	
Attachable Labels	10 pieces	

#### Bit Assignment 0910 ASL 146

Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	–	–	–	–	1-4	1-3/4	1-2	1-1/2
M12 Output								
Byte 0	–	–	–	–	0-4	0-3/4	0-2	0-1/2

#### Bit Assignment 0910 ASL 425




Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	–	–	–	–	3	2	1	0
M12 Output								
Byte 0	–	–	–	–	0-4	0-3	0-2	0-1

**Diagnostic Indication**




LED	Indicator	Condition
I-1..4/O-1..4	Yellow	Channel status
AS-i (only 0910 ASL 425)	Green	AS-Interface power supply active
U-AS-i (only 0910 ASL 146)	Green	AS-Interface power supply active
AUX	Green	Actuator supply active
DIA (only 0910 ASL 425)	Red Red blinking	Communication error/address at 0 Periphery error (actuator short circuit/sensor supply error)
FID (only 0910 ASL 146)	Red Red blinking	Communication error Periphery error (sensor/actuator short circuit)


Periphery errors like short circuits or overloads can be sent to the master in the form of a collective diagnosis.  
In addition, there is a status LED on the relevant slave.

**Pin Assignment 0910 AS 146**


AUX	Input M12	Input 1	Input 2	Input 3	Input 4
		<b>Input 1</b> 1 = +24 V 2 = IN 2 3 = GND (0 V) 4 = IN 1 5 = Earth	<b>Input 2</b> 1 = +24 V 2 = n.c. 3 = GND (0 V) 4 = IN 2 5 = Earth	<b>Input 3</b> 1 = +24 V 2 = IN 4 3 = GND (0 V) 4 = IN 3 5 = Earth	<b>Input 4</b> 1 = +24 V 2 = n.c. 3 = GND (0 V) 4 = IN 4 5 = Earth
Output M12					
		<b>Output 1</b> 1 = n.c. 2 = OUT 2 3 = GND (0 V) 4 = OUT 1 5 = Earth	<b>Output 2</b> 1 = n.c. 2 = n.c. 3 = GND (0 V) 4 = OUT 2 5 = Earth	<b>Output 3</b> 1 = n.c. 2 = OUT 4 3 = GND (0 V) 4 = OUT 3 5 = Earth	<b>Output 4</b> 1 = n.c. 2 = n.c. 3 = GND (0 V) 4 = OUT 4 5 = Earth

**Pin Assignment 0910 ASL 425**

Bus Connection M12	Input M12	Input 1	Input 2	Input 3	Input 4
		<b>Input 1</b> 1 = +24 V 2 = n.c. 3 = GND (0 V) 4 = IN 1 5 = Earth	<b>Input 2</b> 1 = +24 V 2 = n.c. 3 = GND (0 V) 4 = IN 2 5 = Earth	<b>Input 3</b> 1 = +24 V 2 = n.c. 3 = GND (0 V) 4 = IN 3 5 = Earth	<b>Input 4</b> 1 = +24 V 2 = n.c. 3 = GND (0 V) 4 = IN 4 5 = Earth
Output M12					
		<b>Output 1</b> 1 = n.c. 2 = n.c. 3 = GND (0 V) 4 = OUT 1 5 = Earth	<b>Output 2</b> 1 = n.c. 2 = n.c. 3 = GND (0 V) 4 = OUT 2 5 = Earth	<b>Output 3</b> 1 = n.c. 2 = n.c. 3 = GND (0 V) 4 = OUT 3 5 = Earth	<b>Output 4</b> 1 = n.c. 2 = n.c. 3 = GND (0 V) 4 = OUT 4 5 = Earth

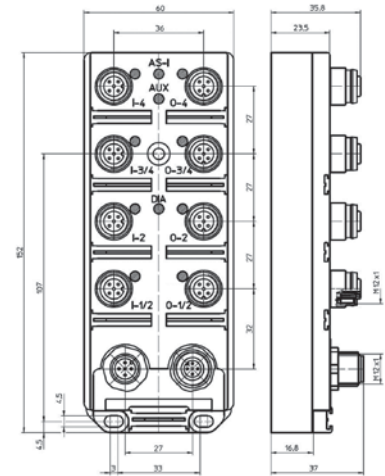

0910 ASL 146

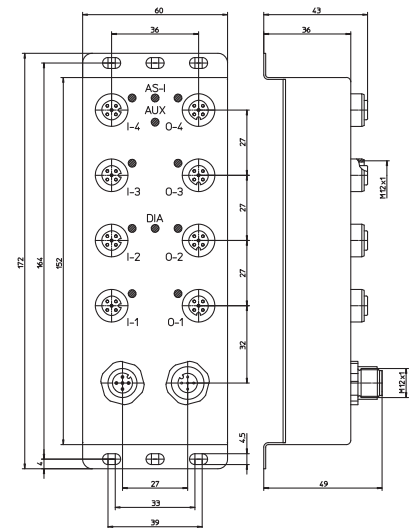

0910 ASL 425









# Fieldbus Variable I/O Modules: LioN-Link



**Be certain. Belden.**

## I/O Modules Active – Modular (LioN-Link Series)

LioN-Link is a modular, decentralized IP67 system for field level applications.. Based on a bus coupler, the I/O modules are distributed independently of the field bus and decentrally via two lines to the field. Up to 15 modules can be connected per line. A 100 m extension is possible in each case.

Bus couplers are available for PROFINET, PROFIBUS, DeviceNet™ and CANopen® as well as digital I/O modules in 8 I/O universal or 16 I/O universal or 8 I and 16 I variants; there are also analog input modules as well as valve interface components. The digital input and output modules are equipped with universal I/O functionality, which allows the most varied configurations to be implemented as every signal pin can be used both as an input and an output – and without additional configuration.

The LioN-Link modules were developed for process-oriented use.

Thanks to an innovative technological development, the complete production process can be carried out without encapsulation, making LioN-Link modules ideal for use in the smallest handling robots due to their low weight.

All modules are vibration- and shock-proof as well as water-proof in accordance with IP67, which means they can be used in a process-oriented applications. The cordsets to the sensors and actuators can therefore also be shortened. Impermeability is guaranteed for a variety of coolants/lubricants. Critical or unfamiliar agents can be tested in our laboratory for compatibility.





## Customized connectivity solutions for high flexi- bility on the field level

The LioN-Link system offers a cost-optimized wiring solution, due to its field bus-independent I/O modules. The wiring of the LioN-Link modules is performed on the basis of standard wiring components such as CAN-/DeviceNet™ Thin Cables; no special cables such as fiber optic cables or M12 connectors with special plug-in arrangement (six-pole) are required. A terminating resistor is not required for connecting the last LioN-Link module in a line.

Use of standardized components allows a reduction in the variety of part types and simplifies global procurement.

LioN-Link provides a comprehensive portfolio of connection components at the field level. These include components for the control of electric drives, the networking of intelligent sensors and actuators (e.g., proximity switches, motor starters and valves) as well as straightforward retrofitting/conversion of machines.

### General Information

#### Standard features:

- Bus-independent I/O modules ensure excellent flexibility and reduced storage costs
- Space-saving, light-weight module for a wide range of applications
- Simplified planning, due to universal I/O modules
- Cost-effective solution – up to 480 I/Os on one bus coupler
- Quick availability with the use of standardized wiring components
- Easy and safe installation, thanks to color-coded slots
- High degree of reliability, as there are no terminating resistors
- Easy startup and extension of the system, because the modules operate without manual intervention

### Customer Benefits

- Cost savings/profit increases
- Simple installation and maintenance: the time required is minimized, since the signals are bundled and transmitted via the field bus
- Flexibility: all standard field bus systems are supported
- Reliability: fail-safe modules with long service life (long-term stability)
- Competitive edge, owing to simple procurement of spare parts via world-wide sales network


### Product Features

- Up to 15 devices per line, each with a 100 m extension
- Up to 30 I/O modules are possible on a bus coupler (480 signals)
- Analog and digital modules
- Variants for special applications (valve terminals, motor controllers, etc.)
- Field bus-independent I/O modules
- Additional network extension without repeater possible at maximum speed
- No terminating resistor needed



## Matrix Lion-Link

Function	Slots Bus Type		Slots I/O Type		Slots Power Type		
	M12	M23	M8	M12	M12	M23	7/8"
<b>BusHead</b>							
<b>Industrial Ethernet Protocol</b>							
PROFINET	✓	–	–	–	–	–	✓
<b>Fieldbus Protocol</b>							
PROFIBUS	✓	–	–	–	–	–	✓
DervicNet	✓	–	–	–	–	–	✓
CANopen®	✓	–	–	–	–	–	✓
<b>Bus Independent I/O Modules</b>							
<b>Housing Form S</b>							
8 Digital IN	✓	–	✓	✓	–	–	–
16 Digital IN	✓	–	–	✓	–	–	–
4 Digital OUT (2 A)	✓	–	–	✓	–	–	–
8 Digital OUT (2 A)	✓	–	–	–	–	–	–
16 Digital OUT (0.5 A)	✓	–	–	–	–	–	–
8 Digital IN/4 Digital OUT (2 A)	✓	–	✓	–	✓	–	–
8 Digital IN/8 Digital OUT (0.5 A)	✓	–	✓	–	✓	–	–
16 Digital IN/OUT (0.5 A)	✓	–	✓	–	–	–	✓
8 Digital IN/OUT (0.5 A)	✓	–	✓	✓	–	✓	–
4 Analog IN (0 to 20 mA, 0 to 10 V)	✓	–	–	✓	–	–	–
<b>Housing Form M</b>							
16 Digital IN	✓	–	–	✓	–	–	–
Multipol 16 Digital OUT (0.5 A)	✓	–	–	✓	✓	–	–
16 Digital IN/OUT (0.5 A)	✓	–	–	–	✓	–	✓
Multipol 16 DIO (0.5 A)	✓	–	–	✓	✓	–	–
<b>Accessories Lion-Link</b>							
Cord sets, single-ended	✓	–	✓	✓	✓	✓	✓
Cord sets, double-ended	✓	–	✓	✓	✓	✓	✓
Field attachable connectors	✓	–	✓	✓	✓	✓	✓
T-connectors	✓	–	✓	✓	✓	✓	✓
Power distributor	✓	–	–	–	✓	✓	✓

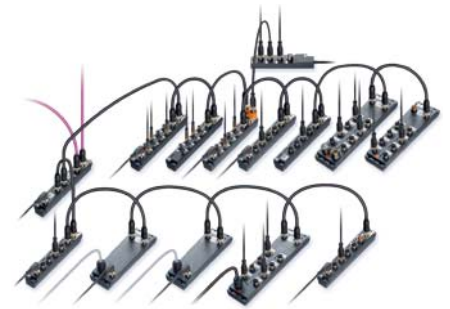

## LioN-Link BusHead PROFINET Device Slave for the Connection Between the Higher Level Fieldbus and the Fieldbus Independent I/O Modules




### Technical Information


Product Description	
Type	0940 ESL 601
	     
Description	LioN-Link PROFINET BusHead, IP67 bus coupler module, M12 LioN-Link connection, 5-poles, M12 power supply connection, 5-poles, M12 LAN connection, 4-poles, D-coded, integrated 3-port switch, web server, IRT (Isochrone Real Time communication)
Note	BusHead for LioN-Link standard modules, Motion module "0942 UEM 783" and I/O-Link module "0942 UEM 620"
Technical Data	
Protection Class	IP67
Environmental Temperature	-10°C to +60°C
Weight	800 g
Bus System	
ID Number	VendorID: 0016A hex, DeviceID: 0302 hex
GSDML File	gsdml-v2.2-Lumberg Automation-LioN Link-20090623.xml
Transmission Rate	100 Mbit/s full duplex
System/Sensors Power Supply	
Rated Voltage	24 V DC
Voltage Range	19 to 30 V DC
Power Consumption	typ. 100 mA
Included in Delivery	
M12 Dust Covers	4 pieces
Attachable Labels	6 pieces

### Diagnostic Indication

LED	Indicator	Condition
I/Os1	Red Green	Wrong configuration/module exchanged Online, communication with PLC
I/Os2	Red Green Off	Wrong configuration/module exchanged Online, communication with PLC Branch not in use
Us1	Green	Sensor/system power supply Line 1
Us2	Green	Sensor/system power supply Line 2
LNK/ACT	Green Orange blinking	Connection to an Ethernet device I/O device exchanging data
BF	Red	No I/O controller or wrong LioN-Link configuration
DIA	Red	Common indicator for periphery errors

Pin Assignment

LAN Connection M12, D-coded	LiON-Link Connection M12	Power Supply M12
 <p>1 = TD+ 2 = RD+ 3 = TD- 4 = RD-  Housing = shielded</p>	 <p>1 = Drain 2 = 24 V Sensor/System 3 = 0 V Sensor/System 4 = Data + 5 = Data -</p>	 <p>1 = +24 V 2 = +24 V 3 = 0 V 4 = 0 V 5 = Earth</p>

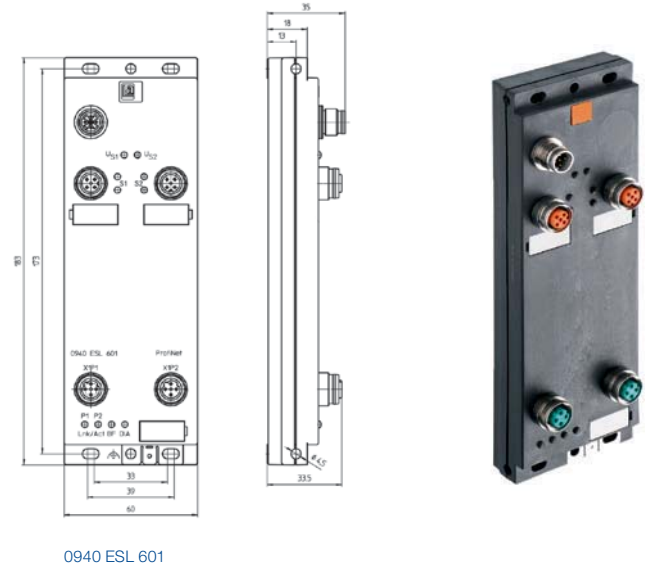

## LioN-Link BusHead PROFIBUS Device Slave for the Connection Between the Higher Level Fieldbus and the Fieldbus Independent I/O Modules

### Technical Information




Product Description			
Type	0940 PSL 601	0940 PSL 602	0940 PSL 603
	 	 	 
Description	LioN-Link PROFIBUS BusHead, IP67 bus coupler module with M12 bus connection, 5-poles, B-coded, rotary switches for addressing, M12 LioN-Link connection, 5-poles, M12 power supply connection, 5-poles	LioN-Link PROFIBUS BusHead, IP67 bus coupler module with M12 bus connection, 5-poles, B-coded, rotary switches for addressing, M12 LioN-Link connection, 5-poles, M12 power supply connection, 5-poles	LioN-Link PROFIBUS BusHead with M12 bus connection, 5-poles, B-coded, rotary switches for addressing, M12 LioN-Link connection, 5-poles, M12 power supply connection, 5-poles
Note	BusHead for LioN-Link standard modules	Supports Profibus DP-V1 (acyclic communication), BusHead for LioN-Link standard modules, Motion module “0942 UEM 783” and I/O-Link module “0942 UEM 620”	BusHead for LioN-Link standard modules, PROFIBUS-Slave for applications such as tool change or options handling and “Shadow Mode” I/O module “0942 UEM 670”
Technical Data			
Protection Class	IP67		
Environmental Temperature	-10°C to +60°C		
Weight	200 g		
Bus System			
ID Number	0A36 hex	0B99 hex	0B98 hex
GSD File	Lum_0A36.gsd	Lum_0B99.gsd	Lum_0B98.gsd
Transmission Rate	max. 12 MBaud		
Address Range	1 to 125 dez		
System/Sensors Power Supply			
Rated Voltage	24 V DC		
Voltage Range	19 to 30 V DC		
Power Consumption	typ. 100 mA		
Included in Delivery			
M12 Dust Covers	2 pieces		
Attachable Labels	6 pieces		

### Diagnostic Indication


LED	Indicator	Condition
I/O Line 1	Red	Wrong configuration/module exchanged
I/O Line 2	Green	Online, communication with PLC
	Off	Branch not in use (module not connected)
Us1	Green	Sensor/system power supply Line 1
Us2	Green	Sensor/system power supply Line 2
BF	Red	Bus error
DIA	Red	Common indicator for periphery errors

Diagnosis according to Profibus specification, diagnosis for communication status, module breakdown and periphery faults in the Link system

Pin Assignment

Bus Connection M12, B-coded	LioN-Link Connection M12	Power Supply M12
 <p>1 = +5 V <sup>1</sup> 2 = Line A 3 = GND (0 V) <sup>1</sup> 4 = Line B 5 = Earth</p>	 <p>1 = Drain 2 = 24 V System 3 = 0 V System 4 = Data + 5 = Data -</p>	 <p>1 = +24 V 2 = +24 V 3 = 0 V 4 = 0 V 5 = Earth</p>

1 = Internal signals

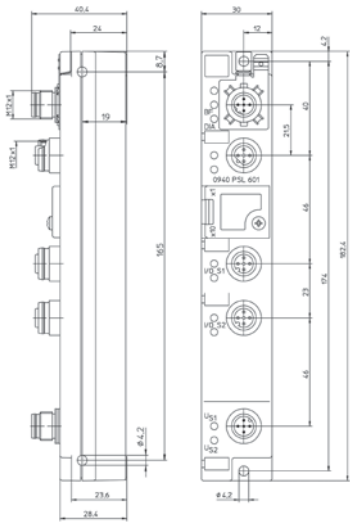

0940 PSL 601 | 0940 PSL 602 | 0940 PSL 603

## LioN-Link BusHead CANopen® and LioN-Link BusHead DeviceNet™ Device Slaves for the Connection Between the Higher Level Fieldbus and the Fieldbus Independent I/O Modules

### Technical Information

Product Description		
Type	0940 CSL 601	0940 DSL 601
	<div></div> <div></div>	<div></div> <div></div>
Description	LioN-Link CANopen® BusHead with M12 bus connection, 5-poles, rotary switches for addressing, M12 LioN-Link connection, 5-poles, M12 power supply connection, 5-poles	LioN-Link DeviceNet™ BusHead with M12 bus connection, 5-poles, rotary switches for addressing, M12 LioN-Link connection, 5-poles, M12 power supply connection, 5-poles
Note	A maximum of 16 LioN-Link I/O modules can be operated on this BusHead. Both supply points on the BusHead must always be connected.	A maximum of 16 LioN-Link I/O modules can be operated on this BusHead. Both supply points on the BusHead must always be connected.
Technical Data		
Protection Class	IP67	
Environmental Temperature	-10°C to +60°C	
Weight	200 g	
Bus System		
GSD/EDS File	0940CSL601.eds	00_0940DSL601.eds
Transmission Rate	max. 1 MBaud	max. 500 kBaud
Address Range	1 to 99 dez	1 to 63 dez
Fieldbus Interfaces		
Rated Voltage	24 V DC	
Voltage Range	11 to 30 V DC	
Power Consumption	typ. 10 mA	
System/Sensors Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Power Consumption	System: typ. 60 mA, Fieldbus: typ. 10 mA	typ. 50 mA
Included in Delivery		
M12 Dust Covers	2 pieces	
Attachable Labels	6 pieces	

### Diagnostic Indication

LED	Indicator	Condition
I/O Line 1	Red	Wrong configuration/module exchanged
I/O Line 2	Green	Online, communication with PLC
	Off	Branch not in use (module not connected)
Us (only 0940 DSL 601)	Green	Power supply of fieldbus interface
Us1	Green	Sensor/system power supply Line 1
Us2	Green	Sensor/system power supply Line 2
MS	Green	Device is ready for operating
	Green blinking	Wrong configuration
	Red	Unrecoverable fault
	Red blinking	Recoverable fault
	Red/green blinking	Self test is running
NS	Green	Online, communication with PLC
	Green blinking	Online, no communication with PLC
	Red blinking	Time-out state of one or more I/O connections
	Red	Failed communication device, Bus-off status, duplicate MAC-ID

Diagnosis for communication status, module breakdown and periphery faults in the Link system







### Bit Assignment 0940 DSL 601

Bit	7	6	5	4	3	2	1	0
Input								
Byte 0	0	0	0	0	US1	US2	KS1	KS2
Byte 1	DIAG S_8	DIAG S_7	DIAG S_6	DIAG S_5	DIAG S_4	DIAG S_3	DIAG S_2	DIAG S_1
Byte 2	DIAG S_16	DIAG S_15	DIAG S_14	DIAG S_13	DIAG S_12	DIAG S_11	DIAG S_10	DIAG S_9
Byte 3	STATUS S_8	STATUS S_7	STATUS S_6	STATUS S_5	STATUS S_4	STATUS S_3	STATUS S_2	STATUS S_1
Byte 4	STATUS S_16	STATUS S_15	STATUS S_14	STATUS S_13	STATUS S_12	STATUS S_11	STATUS S_10	STATUS S_9


USx: Low voltage Line x  
 KSx: Short circuit on Line x  
 DIAG S\_x: Diagnostic message I/O module x  
 STATUS S\_x: Configuration error I/O module x

### Pin Assignment

Bus Connection M12	LiOn-Link Connection M12	Power Supply M12
 <p>1 = Drain                  2 = +24 V                  3 = GND (0 V)                  4 = CAN_H                  5 = CAN_L                  Housing = Earth</p>	 <p>1 = Drain                  2 = +24 V Sensor/System                  3 = 0 V Sensor/System                  4 = Data +                  5 = Data -</p>	 <p>1 = +24 V                  2 = +24 V                  3 = 0 V                  4 = 0 V                  5 = Earth</p>

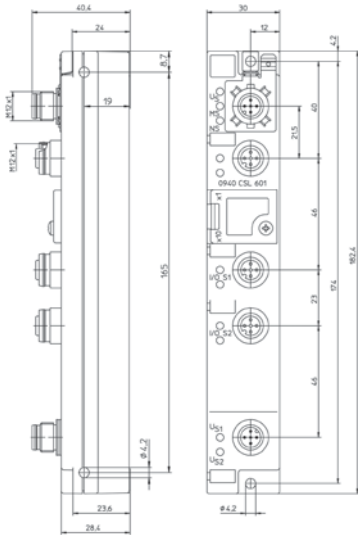

0940 CSL 601

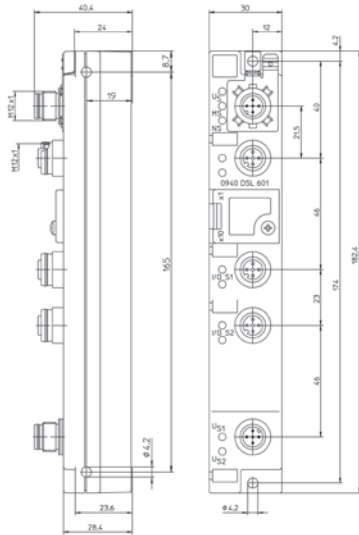

0940 DSL 601



## LioN-Link I/O Modules – Digital Inputs

### Technical Information

Product Description			
Type	0942 UEM 601	0942 UEM 651	0942 UEM 701
	<div></div> 	<div></div> 	<div></div> 
Description	LioN-Link I/O module with 8 digital inputs to connect standard sensors, 4 x M12 socket, 5-poles	LioN-Link I/O module with 8 digital inputs to connect standard sensors, 8 x M8 socket, 3-poles	LioN-Link I/O module with 16 digital inputs to connect standard sensors, 8 x M12 socket, 5-poles
Technical Data			
Protection Class	IP67		
Environmental Temperature	-10°C to +60°C		
Weight	175 g		275 g
System/Sensors Power Supply			
Rated Voltage	24 V DC		
Voltage Range	19 to 30 V DC		
Power Consumption	typ. 70 mA		typ. 100 mA
Input Power Supply			
Voltage Range	min. (U <sub>system</sub> – 1.5 V)		
Sensor Current	700 mA per module		700 mA
Indicator	LED green		
Inputs			
Rated Input Current	24 V DC		
Number of Digital Channels	max. 8		max. 16
Status Indicator	LED yellow per channel		
Diagnostic Indicator	LED red per channel		–
Included in Delivery			
M8 Dust Covers	–	4 pieces	–
M12 Dust Covers	2 pieces	–	4 pieces
Attachable Labels	6 pieces	10 pieces	10 pieces

### Bit Assignment

Bit	7	6	5	4	3	2	1	0
<b>M12 Input 0942 UEM 601</b>								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
<b>M12 Input 0942 UEM 701</b>								
Byte 0	8	7	6	5	4	3	2	1
<b>M8 Input 0942 UEM 651</b>								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
Byte 1	8B	8A	7B	7A	6B	6A	5B	5A


### Diagnostic Indication

LED	Indicator	Condition
1...4 A/B	Yellow	Channel status
1...4 A/B	Red	Periphery error
I/O	Red Red blinking Green	Wrong configuration/module exchanged Not recognized by the BusHead Online, communication with BusHead
Us	Green	Sensor/system power supply
UL (only 0942 UEM 600)	Green	Actuator power supply
DIA	Red	Common indicator for periphery errors

Periphery fault diagnosis for sensor short circuit, sensor low voltage detection

## Pin Assignment 0942 UEM 601

## LioN-Link Connection M12



1 = Drain  
2 = +24 V Sensor/System  
3 = 0 V Sensor/System  
4 = Data +  
5 = Data -

## Actuator/Sensor Connection M12




1 = +24 V  
2 = IN B  
3 = GND (0 V)  
4 = IN A  
5 = Earth



### Pin Assignment 0942 UEM 651

## LioN-Link Connection M12




1 = Drain  
2 = +24 V Sensor/System  
3 = 0 V Sensor/System  
4 = Data +  
5 = Data -

### Actuator/Sensor Connection M12


$$\begin{aligned} 1 &= +24 \text{ V} \\ 3 &= 0 \text{ V} \\ 4 &= 1 \text{ N} \end{aligned}$$


## Pin Assignment 0942 UEM 701

## LioN-Link Connection M12




1 = Drain  
2 = +24 V Sensor/System  
3 = 0 V Sensor/System  
4 = Data +  
5 = Data -


## Actuator/Sensor Connection M12




1 = +24 V  
2 = IN/OUT B  
3 = 0 V  
4 = IN/OUT A  
5 = Earth

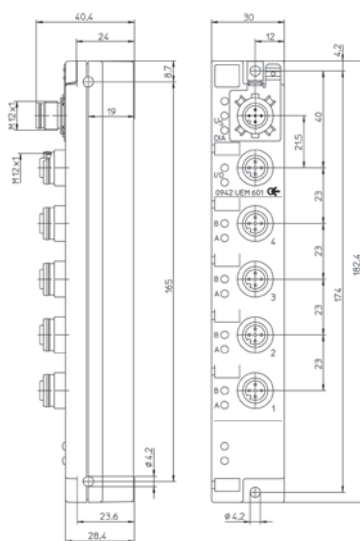

0942 UEM 601

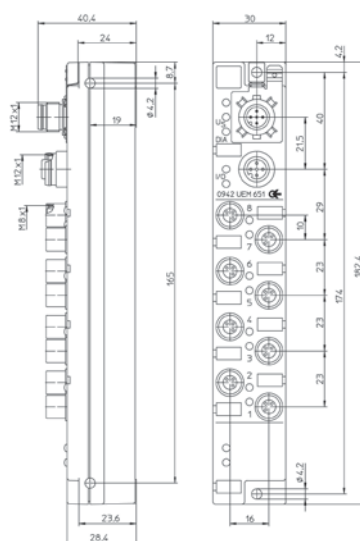

0942 UEM 651

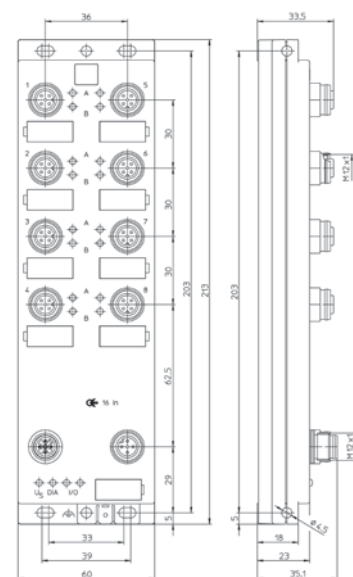


0942 UEM 701

The application of these products in harsh environments should always be checked before use.  
Technical modifications reserved.

## LioN-Link I/O Modules – Digital Outputs

### Technical Information

Product Description			
Type	0942 UEM 602	0942 UEM 612	0942 UEM 782
			
Description	LioN-Link I/O module with 4 digital outputs, 4 x M12 socket, 5-poles, 2 A per channel, one channel per socket	LioN-Link I/O module with 4 digital outputs, 4 x M12 socket, 5-poles, M12 actuator supply, 2 A per channel, one channel per socket	LioN-Link I/O module with 16 digital outputs, multipole cable interface to connect valve terminals, manual tool changing devices, IP20 terminal boxes
Note	Particularly suitable for the control of hydraulic valves.	Suitable for safety critical applications within performance levels A through D. The instructions in the LioN-Link manual must be observed in this case.	–
Technical Data			
Protection Class	IP67		
Environmental Temperature	-10°C to +60°C		
Weight	200 g		320 g (with 1 m cable)
System/Sensors Power Supply			
Rated Voltage	24 V DC		
Voltage Range	19 to 30 V DC		
Power Consumption	typ. 70 mA		40 mA
Output Power Supply			
Rated Voltage	24 V DC		
Voltage Range	19 to 30 V DC	19 to 28.8 V DC (SELV/PELV acc. to EN 60950-1)	19 to 30 V DC
Reverse Polarity Protection	yes/antiparallel diode	yes/antiparallel diode, external fuse with 4/6 A medium time lag mandatory	yes/antiparallel diode
Indicator	LED green		
Outputs			
Rated Output Current	2 A per channel		0.5 A per channel
Short Circuit-proof	yes		
Max. Current Carrying Capacity	4 A (3 pole supply line); 6 A (5 pole supply line)		6 A (3 A per group)
Number of Digital Channels	max. 4		max. 16
Status Indicator	LED yellow per channel		–
Diagnostic Indicator	LED red per channel		–
Included in Delivery			
M12 Dust Covers	2 pieces		
Attachable Labels	6 pieces		10 pieces

### Bit Assignment




Bit	7	6	5	4	3	2	1	0
<b>M12 Output 0942 UEM 602 + 612</b>								
Byte 0	–	–	–	–	4A	3A	2A	1A
<b>M12 Output 0942 UEM 782</b>								
Byte 0	RD	BU	PK	GY	YE	GN	BN	WH
Byte 1	YE/BN	WH/YE	BN/GN	WH/GN	RD/BU	GY/PK	VT	BK

### Diagnostic Indication

LED	Indicator	Condition
1...4 A (only 0942 UEM 602 + 612)	Yellow	Channel status
1...4 DIA (only 0942 UEM 602 + 612)	Red	Periphery error/output active with no actuator supply voltage
I/O	Red Red blinking Green	Wrong configuration/module exchanged Not recognized by the BusHead Online, communication with BusHead
Us	Green	Sensor/system power supply
UL	Green	Actuator power supply
DIA	Red	Common indicator for periphery errors


Periphery fault diagnosis for actuator short circuit/overload per channel

### Pin Assignment 0942 UEM 602 and 0942 UEM 612


LiOn-Link Connection M12	Actuator Connection M12	Actuator Supply M12
 <p>1 = Drain 2 = +24 V Sensor/System 3 = 0 V Sensor/System 4 = Data + 5 = Data -</p>	 <p>1 = n.c. 2 = n.c. 3 = 0 V 4 = OUT A 5 = Earth</p>	 <p>1 = +24 V DC 2 = +24 V DC 3 = GND 0 V 4 = GND 0 V 5 = Functional earth</p>

## Pin Assignment 0942 UEM 782

LioN-Link Connection M12		Actuator/Sensor Connection M12	
	1 = Drain 2 = +24 V Sensor/System 3 = 0 V Sensor/System 4 = Data + 5 = Data -		1 = +24 V (UL 1-8) 2 = +24 V (UL 9-16) 3 = GND (0 V) 4 = GND (0 V) 5 = Earth

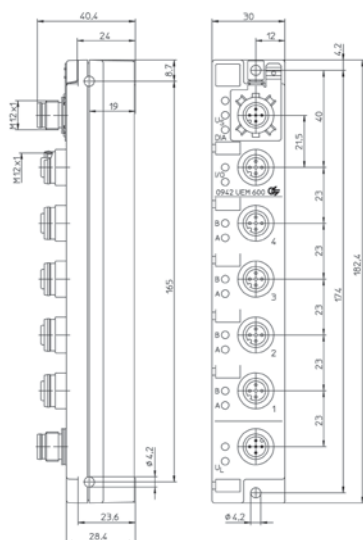

0942 UEM 602, 0942 UEM 612

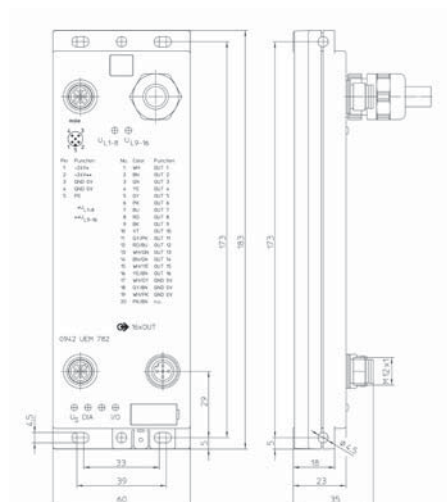










0942 UEM 782



The application of these products in harsh environments should always be checked before use.  
Technical modifications reserved.

## LioN-Link I/O Modules – Universal

## Technical Information

Product Description		
Type	0942 UEM 600	0942 UEM 620
	<div></div>	<div></div>
Description	LioN-Link I/O module with 8 digital I/O channels, channels can be used universally as inputs or outputs, 4 x M12 socket, 5-poles, M12 actuator supply, 5-poles	LioN-Link I/O module with 4 I/O-Link channels, each channel can be configured universally in standard digital I/O mode (SIO mode) or in communications mode, M12 socket, 4-poles, M12 I/O-Link supply, 5-poles
Note	–	Only with BusHead 0940 PSL 602 or ProfiNet BusHead 0940 ESL 601. The information in the operating instructions must be observed.
Technical Data		
Protection Class	IP67	
Environmental Temperature	-10°C to +60°C	
Weight	200 g	175 g
System/Sensors Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Power Consumption	typ. 70 mA	
Input Power Supply		
Voltage Range	min. (U <sub>System</sub> – 1.5 V)	24 V DC
Sensor Current	700 mA per module	
Indicator	LED green	
Inputs		
Rated Input Current	24 V DC	
Number of Digital Channels	max. 8	
Status Indicator	LED yellow per channel	LED A green/yellow
Diagnostic Indicator	LED red per channel	LED red
Output Power Supply		I/O-Link-Power Supply
Rated Voltage	24 V DC	24 V DC
Voltage Range	19 to 30 V DC	19 to 30 V DC
Reverse Polarity Protection	yes/antiparallel diode	yes/antiparallel diode
Indicator	LED green	LED green
Outputs		
Rated Output Current	1.6 A per channel	–
Short Circuit-proof	yes	–
Max. Current Carrying Capacity	4 A per module	–
Number of Digital Channels	max. 8	–
Status Indicator	LED yellow per channel	–
Diagnostic Indicator	LED red per channel	–
Included in Delivery		
M12 Dust Covers	2 pieces	
Attachable Labels	6 pieces	

## Bit Assignment 0942 UEM 600

Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
M12 Output								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A

## Diagnostic Indication




LED	Indicator	Condition
1...4 A/B (only 0942 UEM 600)	Yellow Red	Channel status Periphery error
1...4 A/IOL (only 0942 UEM 620)	Green Yellow	I/O-Link communications mode Standard I/O mode (SIO)
1...4 B/DIA (only 0942 UEM 620)	Red blinking Red	I/O-Link diagnostic: IOL fault SIO mode: periphery fault
I/O (only 0942 UEM 620)	Yellow	Channel status in SIO mode
I/O	Red Red blinking Green	Wrong configuration/module exchanged Not recognized by the BusHead Online, communication with BusHead
Us	Green	Sensor/system power supply
UL	Green	Actuator power supply
DIA	Red	Common indicator for periphery errors

Periphery fault diagnosis for sensor short circuit, actuator short circuit/channel, sensor low voltage detection




**Bit Assignment 0942 UEM 620**


Bit	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Channel 1: 1 byte, 1 word or not configured																
Byte	Byte 0								Byte 1							
Port	1								1							
Channel 2: 1 byte, 1 word or not configured																
Byte	Byte 2								Byte 3							
Port	2								2							
Assignment	I/O-Link-Device process data/High Byte								I/O-Link-Device process data/Low Byte							
Channel 3: 1 byte, 1 word or not configured																
Byte	Byte 4								Byte 5							
Port	3								3							
Assignment	I/O-Link-Device process data/High Byte								I/O-Link-Device process data/Low Byte							
Channel 4: 1 byte, 1 word or not configured																
Byte	Byte 6								Byte 7							
Port	4								4							
Assignment	I/O-Link-Device process data/High Byte								I/O-Link-Device process data/Low Byte							
2 bytes (module status)																
Byte	Byte 8								Byte 9							
Port	–	–	–	–	4	3	2	1	4	3	2	1	4	3	2	1
Assignment	–	–	–	–	Pin 4 = DI	Pin 4 = DI	Pin 4 = DI	Pin 4 = DI	1 = IO-Link 0=SIO	1 = IO-Link 0=SIO	1 = IO-Link 0=SIO	1 = IO-Link 0=SIO	Pin 2 = DI	Pin 2 = DI	Pin 2 = DI	Pin 2 = DI

**Pin Assignment 0942 UEM 600**


LioN-Link Connection M12	Actuator/Sensor Connection M12	Actuator Supply M12
 <p>1 = Drain 2 = +24 V Sensor/System 3 = 0 V Sensor/System 4 = Data + 5 = Data -</p>	 <p>1 = +24 V 2 = IN/OUT B 3 = 0 V 4 = IN/OUT A 5 = Earth</p>	 <p>1 = +24 V 2 = n.c. 3 = GND (0 V) 4 = n.c. 5 = Earth</p>

**Pin Assignment 0942 UEM 620**

LioN-Link Connection M12	I/O-Link Connection M12	I/O-Link Supply M12
 <p>1 = Drain 2 = +24 V Sensor/System 3 = 0 V Sensor/System 4 = Data + 5 = Data -</p>	 <p>1 = +24 V DC 2 = IN B 3 = 0 V 4 = IO-Data/IN A 5 = Earth</p>	 <p>1 = +24 V DC 2 = n.c. 3 = GND 0 V 4 = n.c. 5 = Functional earth</p>

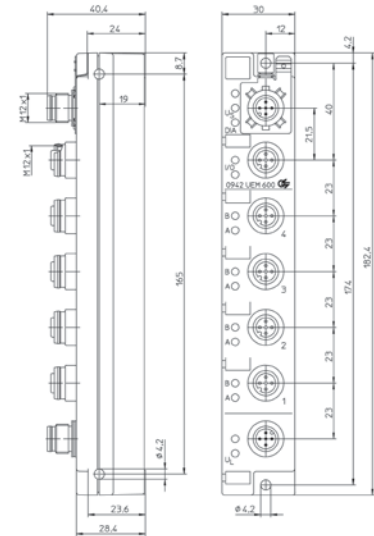

0942 UEM 600

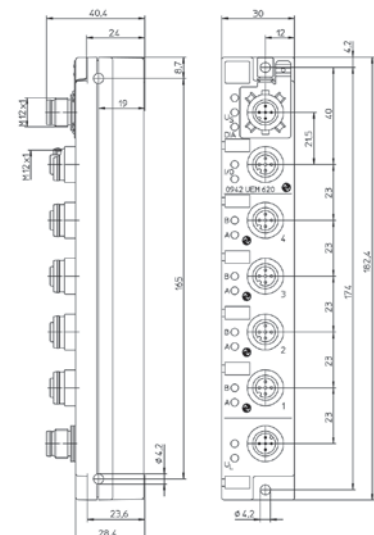









0942 UEM 620



## LioN-Link I/O Modules – Universal

### Technical Information

Product Description		
Type	0942 UEM 650	0942 UEM 670
	<div></div>	<div></div>
Description	LioN-Link I/O module with 8 digital I/O channels, channels can be used universally as inputs or outputs, 8 x M8 socket, 3-poles, M12 actuator supply, 5-poles	LioN-Link I/O module with 8 digital I/O channels, channels can be used universally as inputs or outputs, 8 x M8 socket, 3-poles, actuator supply, 5-poles, “Shadow Mode”
Note	—	This I/O module can only be used with the BusHead 0940 PSL 603. In addition to being used as a dedicated input or output module, this module can also be operated in Shadow Input and Shadow Output mode.
Technical Data		
Protection Class	IP67	
Environmental Temperature	-10°C to +60°C	
Weight	175 g	
System/Sensors Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Power Consumption	typ. 70 mA	
Input Power Supply		
Voltage Range	min. (U <sub>system</sub> – 1.5 V)	24 V DC
Sensor Current	700 mA per module	
Indicator	LED green	
Inputs		
Rated Input Current	24 V DC	
Number of Digital Channels	max. 8	
Status Indicator	LED yellow per channel	
Diagnostic Indicator	LED red per channel	
Output Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Reverse Polarity Protection	yes/antiparallel diode	
Indicator	LED green	
Outputs		
Rated Output Current	0.5 A per channel	
Short Circuit-proof	yes	
Max. Current Carrying Capacity	4 A per module	
Number of Digital Channels	max. 8	
Status Indicator	LED yellow per channel	
Diagnostic Indicator	LED red per channel	
Included in Delivery		
M8 Dust Covers	4 pieces	
Attachable Labels	10 pieces	

### Bit Assignment

Bit	7	6	5	4	3	2	1	0
M8 Input								
Byte 0	8	7	6	5	4	3	2	1
M8 Output								
Byte 0	8	7	6	5	4	3	2	1






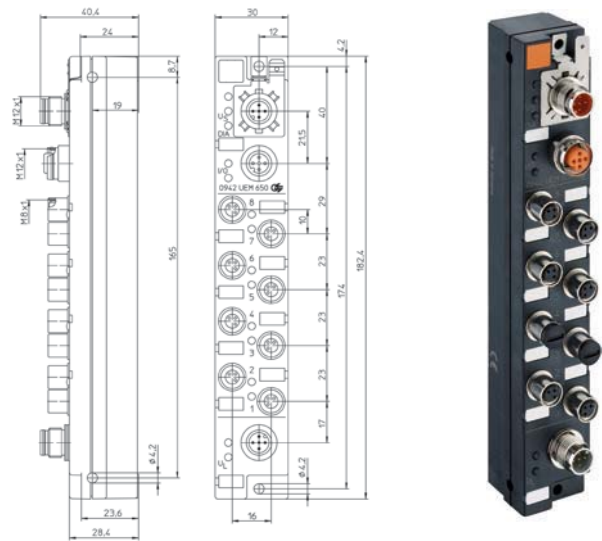
### Diagnostic Indication

LED	Indicator	Condition
1...8	Yellow Red	Channel status Periphery error
I/O	Red Red blinking Green	Wrong configuration/module exchanged Not recognized by the BusHead Online, communication with BusHead
Us	Green	Sensor/system power supply
U <sub>L</sub>	Green	Actuator power supply
DIA	Red	Common indicator for periphery errors

Periphery fault diagnosis for sensor short circuit, actuator short circuit, sensor low voltage detection

### Pin Assignment




LioN-Link Connection M12	Actuator/Sensor Connection M12	Actuator Supply M12
 <p>1 = Drain 2 = +24 V Sensor/System 3 = 0 V Sensor/System 4 = Data + 5 = Data -</p>	 <p>1 = +24 V 3 = 0 V 4 = IN/OUT</p>	 <p>1 = +24 V 2 = n.c. 3 = GND (0 V) 4 = n.c. 5 = Earth</p>



0942 UEM 650 | 0942 UEM 670

## LioN-Link I/O Modules – Universal

### Technical Information

Product Description		
Type	0942 UEM 700	0942 UEM 780
	<div></div>	<div></div>
Description	LioN-Link I/O module with 16 digital I/O channels, channels can be used universally as inputs or outputs, 8 x M12 socket, 5-poles, 7/8" actuator supply, 5-poles	LioN-Link I/O module with 16 digital I/O channels, channels can be used universally as inputs or outputs, multipole cable interface to connect valve terminals, control consoles, manual tool changing devices, IP20 terminal boxes
Technical Data		
Protection Class	IP67	
Environmental Temperature	-10°C to +60°C	
Weight	375 g	800 g (with 5 m cable)
System/Sensors Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Power Consumption	typ. 100 mA	140 mA
Input Power Supply		
Voltage Range	min. (U <sub>System</sub> – 1.5 V)	
Sensor Current	700 mA per module	700 mA
Indicator	LED green	
Inputs		
Rated Input Current	24 V DC	
Number of Digital Channels	max. 8	max. 16
Status Indicator	LED yellow per channel	–
Output Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Reverse Polarity Protection	yes/antiparallel diode	
Indicator	LED green	
Outputs		
Rated Output Current	1.6 A per channel	0.5 A per channel
Short Circuit-proof	yes	
Max. Current Carrying Capacity	9 A per module	6 A (3 A per group)
Number of Digital Channels	max. 16	
Status Indicator	LED yellow per channel	–
Diagnostic Indicator	LED red per channel	–
Included in Delivery		
M12 Dust Covers	4 pieces	
Attachable Labels	10 pieces	

#### Bit Assignment 0942 UEM 700

Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
Byte 1	8B	8A	7B	7A	6B	6A	5B	5A
M12 Output								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
Byte 1	8B	8A	7B	7A	6B	6A	5B	5A









#### Bit Assignment 0942 UEM 780

Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	RD	BU	PK	GY	YE	GN	BN	WH
Byte 1	YE/BN	WH/YE	BN/GN	WH/GN	RD/BU	GY/PK	VT	BK
M12 Output								
Byte 0	RD	BU	PK	GY	YE	GN	BN	WH
Byte 1	YE/BN	WH/YE	BN/GN	WH/GN	RD/BU	GY/PK	VT	BK



## LioN-Link I/O Modules with 4 Analog Inputs

### Technical Information

Product Description		
Type	0942 UEM 630	0942 UEM 631
	<div></div> <div></div>	<div></div> <div></div>
Description	LioN-Link I/O module with 4 analog inputs, 0(4) to 20 mA to connect standard sensors, 4 x M12 socket, 5-poles	LioN-Link I/O module module with 4 analog inputs, 0 to 10 V to connect standard sensors, 4 x M12 socket, 5-poles
Technical Data		
Protection Class	IP67	
Environmental Temperature	-10°C to +60°C	
Weight	175 g	
Input Power Supply		
Voltage Range	min. (U <sub>system</sub> – 1.5 V)	24 V DC
Sensor Current	700 mA per module	
Inputs		
Measurement Signal	(0)4 to 20 mA (current inputs)	0 to 10 V (voltage inputs)
Resolution	12 Bit + sign	
Measuring Fault (full measuring range)	± 1.2%	
Temperature Fault (full measuring range)	± 0.01%/K	
Output Formats	Siemens S7	
Input Impedance	≤ 400 Ω	20 Ω
Conversion Time	typ. 25 ms per channel	
Number of Analog Channels	max. 4	
Status Indicator	LED yellow: channel active	
Module Diagnostic (Module Status Sensor Short Circuit)		
Indicator	LED red/green (I/O)	
Channel Diagnostic		
Overload at Current Measurement	0 to 20 mA	–
Overload at Current Measurement/ Underflow/Broken Wire	4 to 20 mA	–
Indicator	LED red (DIA)	
GSD Configuration		
Module Way	Resolution12 Bit, 10 Bit (conversion time ≤ 3 ms/module)	
Channel Way	Measuring range 0 to 20 mA or 4 to 20 mA, broken wire (only 4 to 20 mA), channel on/off, diagnostic on/off	Channel on/off, diagnostic on/off
Included in Delivery		
M12 Dust Covers	2 pieces	
Attachable Labels	6 pieces	



### Bit Assignment


Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	Channel 1							
Byte 1								
Byte 2	Channel 2							
Byte 3								
Byte 4	Channel 3							
Byte 5								
Byte 6	Channel 4							
Byte 7								

Diagnostic Indication

LED	Indicator	Condition
1...4	Yellow	Channel status
1...4 DIA	Red	Periphery error
I/O	Red Red blinking Green	Wrong configuration/module exchanged Not recognized by the BusHead Online, communication with BusHead
Us	Green	Sensor/system power supply
DIA	Red	Common indicator for periphery errors

Pin Assignment

LioN-Link Connection M12	Sensor Connection M12
 <p>1 = Drain 2 = +24 V 3 = GND (0 V) 4 = Data + 5 = Data -</p>	 <p>1 = +24 V 2 = Signal + 3 = GND (0 V) 4 = GND (0 V) 5 = Earth</p>

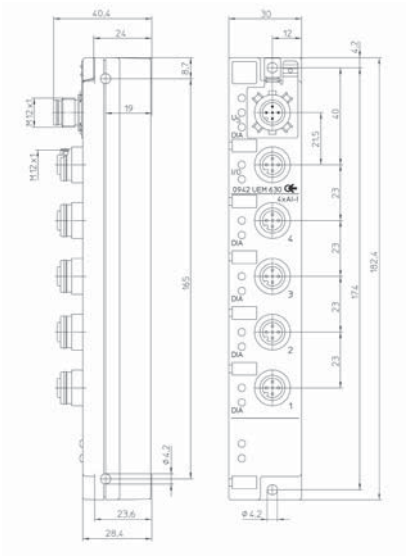





0942 UEM 630 | 0942 UEM 631



## LioN-Link I/O Modules with Digital Inputs and Digital or Analog Outputs (Motion Drive Control)

### Technical Information

Product Description		
Type	0942 UEM 783	
	<div><div></div></div>	
Description	LioN-Link-Motion module with 8 digital inputs and 4 universal outputs (digital or analog), M12 socket, 5-poles, Power supply is via a connecting cable with 7/8" connector, 3-poles	
Note	Only to be used in combination with BusHead 0940 PSL 602. Module used to control brushless (EC) motors as well as brush loaded (DC) motors and all types of digital actuators (e.g. valves or direct current motors). System specific specifications such as speed and acceleration/deceleration can be transmitted via the DP-V1 protocol.	
Technical Data		
Protection Class	IP67	
Environmental Temperature	-10°C to +60°C	
Weight	175 g	
System/Sensors Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Power Consumption	typ. 100 mA	
Input Power Supply		
Voltage Range	24 V DC	
Sensor Current	700 mA per module	
Indicator	LED green	
Inputs		
Rated Input Current	24 V DC, Input current typ. 5 mA	
Number of Digital Channels	max. 8	
Status Indicator	LED yellow per channel	
Diagnostic Indicator	LED red per channel	
Output Power Supply		
Rated Voltage	24 V DC	
Voltage Range	19 to 30 V DC	
Reverse Polarity Protection	yes/antiparallel diode	
Indicator	LED green	
Outputs		
	Type I (Type 3 acc. to IEC 61131-2 Output module Pin 2)	Type II (Type 3 acc. to IEC 61131-2 Output module Pin 5)
Rated Output Current	1.5 A per channel	–
Short Circuit-proof	yes	–
Max. Current Carrying Capacity	7.2 A per module	–
Number of Channels	max. 4 digital	max. 4 analog
Status Indicator	LED yellow per channel	–
Diagnostic Indicator	LED red per channel	–
Included in Delivery		
M12 Dust Covers	4 pieces	
Attachable Labels	10 pieces	



### Bit Assignment

Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
M12 Output								
	Socket 8		Socket 7		Socket 6		Socket 5	
Byte 0	Dir	Start	Dir	Start	Dir	Start	Dir	Start


**Diagnostic Indication**

LED	Indicator	Condition
1...4 A/B	Yellow Red	Channel status Periphery error (actuator short circuit/overload)
I/O	Red Red blinking Green	Wrong configuration/module exchanged Not recognized by the BusHead Online, communication with BusHead
Us	Green	Sensor/system power supply
U <sub>L</sub>	Green	Actuator power supply
DIA	Red	Common indicator for periphery errors

**Pin Assignment**

LioN-Link Connection M12		Actuator/Sensor Connection M12	
	1 = Drain 2 = +24 V Sensor/System 3 = 0 V Sensor/System 4 = Data + 5 = Data -		<b>IN</b> 1 = +24 V DC 2 = IN B 3 = 0 V 4 = IN A 5 = Earth  <b>OUT</b> 1 = +24 V DC 2 = Dir 3 = 0 V 4 = Dia 5 = Speed (0 to 10 V)

**Power Supply for Motors**

	Function	Wire color
	1 = Diag. OUT 2 = +24 V 3 = 0 V	black brown blue



0942 UEM 783







# Actuator/Sensor Distribution Boxes: M8 and M12 Connections



**Be certain. Belden.**

## **Passive Distribution Box (ASB Series)**

Passive distribution boxes come in a variety of configurations and meet practically every on-machine application requirement. They include 4, 6, 10 or 12-port designs with M8 or M12 connections, single or duplex assignments, fixed home run cables or as an on-board pluggable variant. All variants are available with or without LED function indicators.

For particularly harsh environments, a series of distribution boxes with stainless steel housing and stainless steel screwing are available. The portfolio also includes actuator/sensor distribution boxes for avoiding electrostatic discharges. The distribution boxes are made from a special conductive plastic, which releases resulting electrostatic charges to the machine bed or machine ground, which is an indispensable part of universal ESD protection measures.

In order to meet the special requirements of the food and beverage industry, the product range includes distribution boxes whose materials are characterized by a high degree of resistance to aggressive cleaning and chemical agents.



Bundled, stable  
performance for full  
operational reliability

## Flexibly and Quickly

Depending on the design, the bus can have a fixed connection to the distribution box or can be attached to the corresponding plug connection using an M12 or M23 connection line to provide more flexibility. Pluggable versions make it possible to replace individual defective wires instead of the entire distribution box, which facilitates quick maintenance and repair, while reducing costs.

## Guaranteed Reliability

Lumberg Automation™ products are fully tested to ensure complete functionality and maximum operational reliability. LEDs for operating voltage and standard input/output signals make it easier to find errors relating to system malfunctions or other situations requiring maintenance or repair. This minimizes downtime.

## IP67 – Resistance to Vibration and Jarring

Another advantage to using actuator/sensor distribution boxes is their particularly high level of resistance to vibration, which also increases the safety of the electrical wiring. With a minimum IP67 protection rating, actuator/sensor distribution boxes enable on-site installation close to inputs and outputs, which, in turn, simplifies the wiring and improves signal performance. A protective housing or additional protection using a subdistribution box is not necessary.

## Optimal Handling

Lumberg Automation™ products combine compact construction and optimum handling characteristics to enable fast, easy, and safe wiring.

Compact: Due to their compact construction, M8 and M12 distribution boxes only take up a small amount of space in on machines or larger automated systems.

## Turn 8 into 16

As with all Lumberg Automation™ distribution boxes, the gaps between individual slots have been designed to allow connection of 2-way T-distribution boxes, making it possible to control up to 16 actuators and sensors over a single 8-port distribution box.

## For Harsh Environments

Stainless-steel models are also provided for use in food-processing machinery and other special applications where aggressive chemicals or cleaning agents are used.




## General Information

### Standard features:

- Space-saving design for versatile applications in a minimum of space
- Quick installation, due to various fixing options
- Simple installation of both molded and field attachable connectors, thanks to displaced arrangement of the connections in the M8 distributors
- Broad range of applications, thanks to high vibration and shock resistance

### Customer Benefits

- Cost savings/profit increases
- Simple installation and maintenance: because the signals are bundled, the time required is minimized
- Flexibility: various connection technologies (M12 and M8 sensors and actuators, pluggable on the side of the control unit or wired/flexible port variants from four to twelve)
- Ultimate reliability: fail-safe modules with long service life (long-term stability)
- Competitive edge, owing to simple procurement of spare parts via worldwide sales network

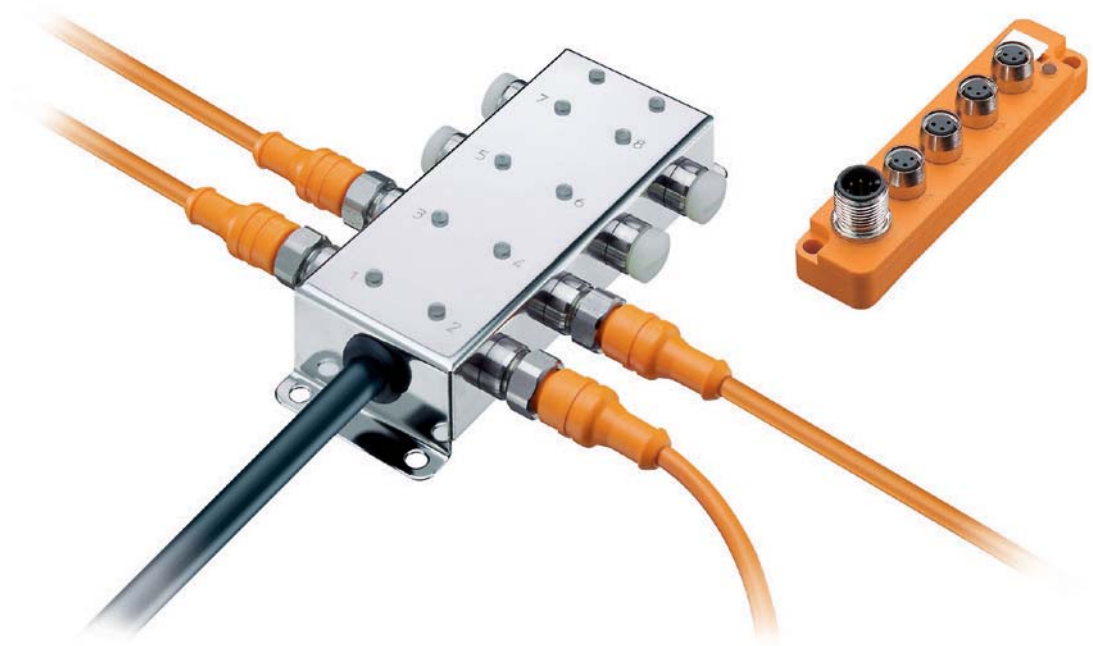

Excellent resistance,  
even under tough  
conditions

#### Product Features



- Environmental temperature: -25°C to +80°C  
(variants also for outdoor applications from -40°C to +80°C)
- Materials (depending on type of module)
  - Housing: die-cast zinc, PBT, TPU or stainless steel
  - Insert: PA or PVC
  - Contacts: CuZn, pre-nickeled and gold plated
- Mechanical data
  - Protection class: IP67/IP69K
- Electrical data
  - Nominal current at +40°C: 1.5 A to 4 A per port and up to 12 A per module
  - Nominal voltage: 10 to 30 V DC
- Module construction/granulari
  - M8 pluggable: 4-, 6-, 8-, 10-way
  - M8 with cable: 4-, 6-, 8-, 10-, 12-way
  - M12: 4-, 6-, 8-way distributor
  - Single or duplex channel model
  - With/without LED
  - Pluggable or with molded cable (complete solutions with wide choice of variants, including customer-specific solutions and OEM solutions)








## Matrix Actuator/Sensor Distribution Boxes

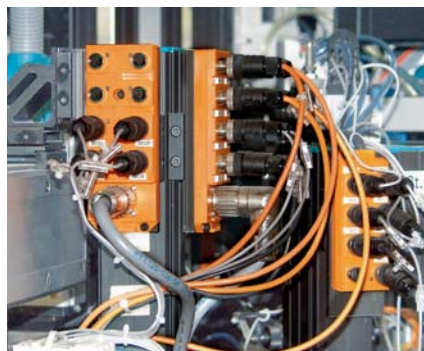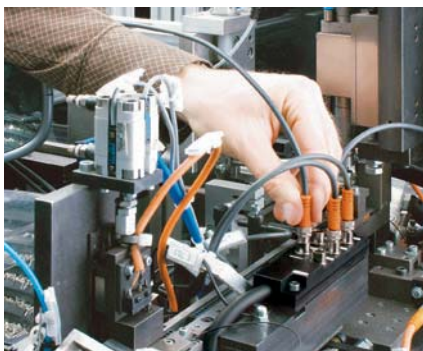Number of Ports	Bus Cable			Port I/O Type	
	Wired (standard lengths 5, 10, 15 m)	Pluggable		M8	M12
		M12	M23		
Actuator/Sensor Distribution Boxes					
With LED					
4 ports	✓	✓	✓	✓	✓
6 ports	✓	✓	✓	✓	✓
8 ports	✓	✓	✓	✓	✓
10 ports	✓	✓	–	✓	–
12 ports	✓	✓	–	✓	–
Without LED					
4 ports	✓	✓	✓	✓	✓
6 ports	✓	✓	✓	✓	✓
8 ports	✓	✓	✓	✓	✓
10 ports	–	–	–	–	–
12 ports	–	–	–	–	–
Special Function					
Single wire connection on the rear	✓	–	–	–	✓
Clamp terminals on the rear	–	–	–	–	✓
M23 male right angle connector	✓	–	–	–	✓
Accessories Actuator/Sensor Distribution Boxes					
Cord sets, single-ended	–	–	–	✓	✓
Cord sets, double-ended	–	–	–	✓	✓
Field attachable connectors	–	–	–	✓	✓
T-connectors	–	–	–	✓	✓
Power distributor	–	✓	✓	–	–




## Pluggable M8 Rugged Distribution Boxes





### Technical Information

Product Description		
Type	ASBSM... LED	SBS 4/LED
	<div></div> <div></div>	<div></div> <div></div>
Description	ASB-S pluggable miniature actuator/sensor distribution box with LED operation and function indicators, 4 to 10 ports, M8 socket, 3-poles, 1 signal per socket, M12 connection for the control cable, 12-poles	ASB-Classic pluggable miniature sensor distribution box with LED operation and function indicators, 4 x M8 socket, 3-poles, 1 signal per socket, M12 connection for the control cable, 8-poles
Technical Data		
Environmental Temperature	-25°C to +70°C	
Housing Material	PBT	TPU, self-extinguishing
Contact Insert	PA, self-extinguishing	TPU, self-extinguishing
Contact	CuZn, pre-nickel and gold-plated M8, M12	
Mechanical Data		
Protection Class	IP67	
Electrical Data		
Volume Resistance	≤ 5 mΩ	
Rated Voltage	10 to 30 V DC	
Rated Current	1.5 A per outlet/1.5 A max. total	2 A per outlet/2 A max. total
Included in Delivery		
M8 Dust Covers	2 pieces	
Attachable Labels	4 ports: 5 pieces 6 to 8 ports: 10 pieces 10 ports: 15 pieces	1 piece

### Wiring Diagram ASBSM... LED

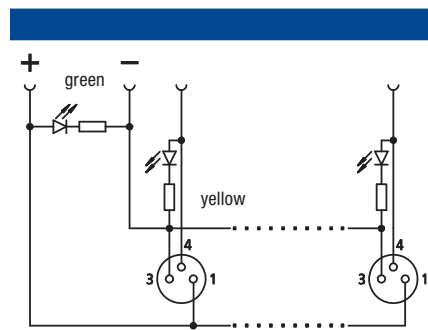


### Pin Assignment ASBSM... LED



4 Ports	6 Ports
 <p>1 = 1 (+) 3 = 2 (-) 4 = 3 (1) 4 (2) 6 (3) 8 (4)</p>	 <p>1 = 1 (+) 3 = 2 (-) 4 = 3 (1) 4 (2) 6 (3) 8 (4) 5 (5) 9 (6)</p>
8 Ports	10 Ports
 <p>1 = 1 (+) 3 = 2 (-) 4 = 3 (1) 4 (2) 6 (3) 8 (4) 5 (5) 9 (6) 7 (7) 10 (8)</p>	 <p>1 = 1 (+) 3 = 2 (-) 4 = 3 (1) 4 (2) 6 (3) 8 (4) 5 (5) 9 (6) 7 (7) 10 (8) 11 (9) 12 (10)</p>



Pin Assignment SBS 4/LED

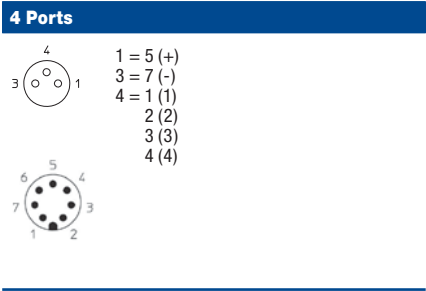

Wiring Diagram SBS 4/LED

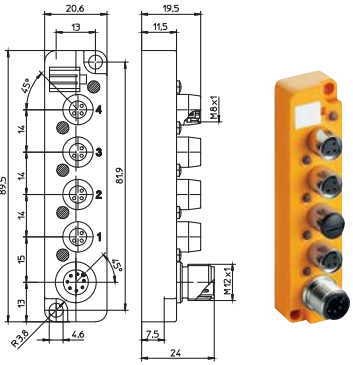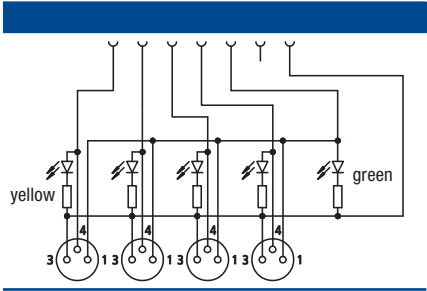


SBS 4/LED


Ordering Designation

Ordering Designation	Performance
ASBSM 4/LED 3	4 ports
ASBSM 6/LED 3	6 ports
ASBSM 8/LED 3	8 ports


Ordering Designation	Performance
ASBSM 10/LED 3	10 ports
SBS 4/LED 3	4 ports

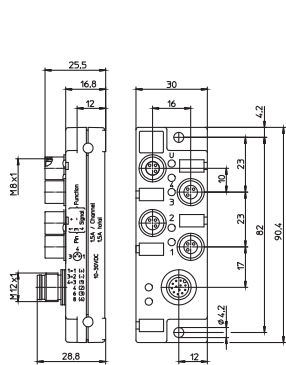


ASBSM 4/LED

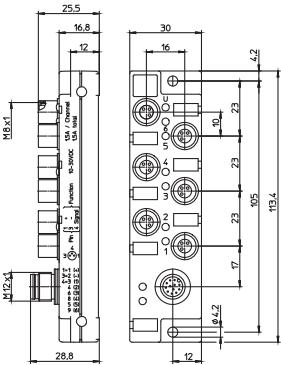

ASBSM 6/LED

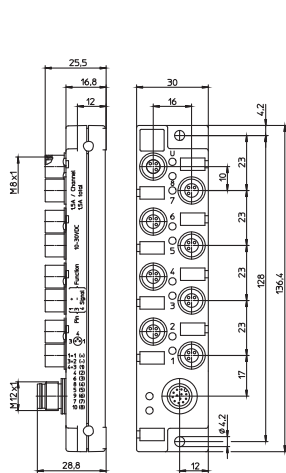

ASBSM 8/LED

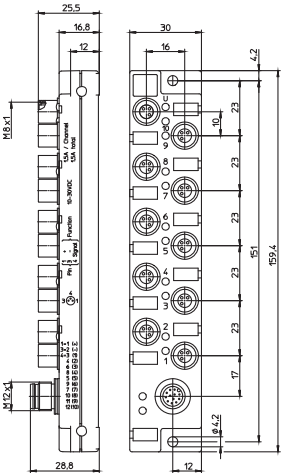







ASBSM 10/LED




## Pluggable M12 Rugged Distribution Boxes



### Technical Information

Product Description			
Type	ASBS...	ASBS... LED	ASBS 8/LED 5-4/4E-4A
	<div></div> <div></div>	<div></div> <div></div>	<div></div> <div></div>
Description	ASB-Classic pluggable actuator/sensor distribution box, 6 and 8 ports, combined FIXCON®/M12 socket, 4-poles, 1 signal per socket, earth connection, M23 connection for the control cable, 12-poles	ASB-Classic pluggable actuator/sensor distribution box with LED operation and function indicators, 4, 6 and 8 ports, combined FIXCON®/M12 socket, 4-poles, 1 signal per socket, earth connection, M23 connection for the control cable, 12-poles	ASB-M pluggable actuator/sensor distribution box with LED operation and function indicators, 8 ports, to connect 4 standard sensors and 4 standard actuators with with separate power supply for inputs and outputs, combined FIXCON®/M12 socket, 4-poles, 1 signal per socket, M23 connection for the control cable, 12-poles
Technical Data			
Environmental Temperature	-15°C to +80°C		
Housing Material	TPU, self-extinguishing		
Contact Insert	PA GF, self-extinguishing		
Contact	CuZn, pre-nickel and gold-plated M8, M12		
Mechanical Data			
Protection Class	IP67		
Electrical Data			
Volume Resistance	≤ 5 mΩ		
Rated Voltage	10 to 30 V DC	60 V DC	10 to 30 V DC
Rated Current	4 A per outlet/12 A max. total		
Included in Delivery			
M12 Dust Covers	2 pieces		
Attachable Labels	5 pieces		


### Wiring Diagram ASBS...

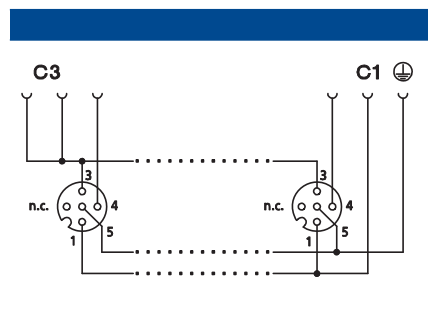




### Pin Assignment ASBS...

6 Ports	8 Ports
 <p>1 = 11 (C1) 2 = n.c. 3 = 9 (C3) □ 4 = 1 (1) 5 = 2 (2) 6 = 3 (3) 7 = 4 (4) 8 = 5 (5) 9 = 6 (6) 10 = 7 (7) 11 = 8 (8) 12 = 9 (9)</p>	 <p>1 = 11 (C1) 2 = n.c. 3 = 9 (C3) □ 4 = 1 (1) 5 = 2 (2) 6 = 3 (3) 7 = 4 (4) 8 = 5 (5) 9 = 6 (6) 10 = 7 (7) 11 = 8 (8) 12 = 9 (9)</p>

### Wiring Diagram ASBS... LED

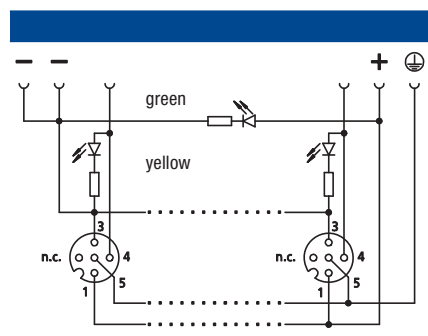

### Pin Assignment ASBS... LED

4 Ports	6 Ports	8 Ports
 <p>1 = 11 (+) 2 = n.c. 3 = 9 (-) □ 4 = 1 (1) 5 = 2 (2) 6 = 3 (3) 7 = 4 (4) 8 = 5 (5) 9 = 6 (6) 10 = 7 (7) 11 = 8 (8) 12 = 9 (9)</p>	 <p>1 = 11 (+) 2 = n.c. 3 = 9 (-) □ 4 = 1 (1) 5 = 2 (2) 6 = 3 (3) 7 = 4 (4) 8 = 5 (5) 9 = 6 (6) 10 = 7 (7) 11 = 8 (8) 12 = 9 (9)</p>	 <p>1 = 11 (+) 2 = n.c. 3 = 9 (-) □ 4 = 1 (1) 5 = 2 (2) 6 = 3 (3) 7 = 4 (4) 8 = 5 (5) 9 = 6 (6) 10 = 7 (7) 11 = 8 (8) 12 = 9 (9)</p>




Pin Assignment ASBS 8/LED 5-4/4E-4A

8 Ports

IN	OUT
1 = 11 (+)	1 = n.c.
2 = 12 (PE)	2 = 12 (PE)
3 = 10 (-)	3 = 9 (-)
4 = 1	4 = 5
5 = 12 (PE)	5 = 12 (PE)


Wiring Diagram ASBS 8/LED 5-4/4E-4A

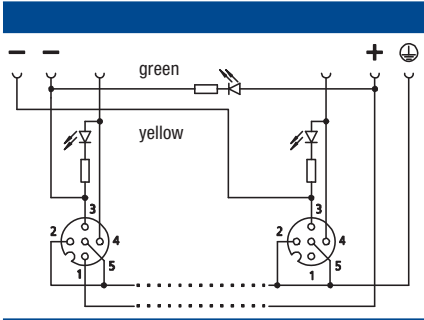


Ordering Designation

Ordering Designation	Performance
ASBS 6 5-4	6 ports
ASBS 8 5-4	8 ports
ASBS 4/LED 5-4	4 ports


Ordering Designation	Performance
ASBS 6/LED 5-4	6 ports
ASBS 8/LED 5-4	8 ports
ASBS 8/LED 5-4/4E4A	8 ports

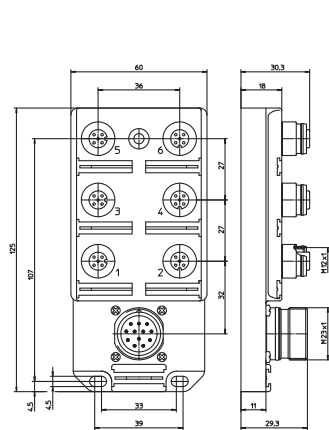


ASBS 6

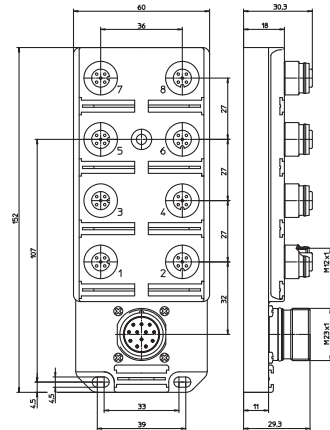


ASBS 8

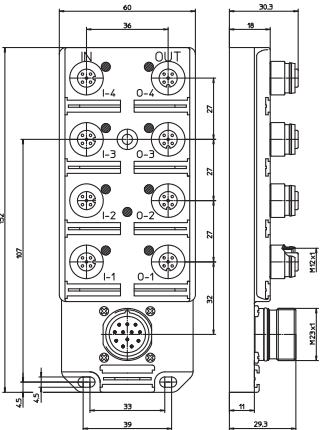


ASBS 8/LED 5-4/4E-4A

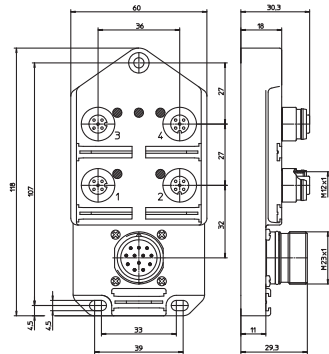

ASBS 4/LED

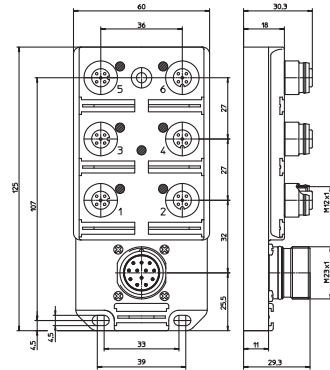



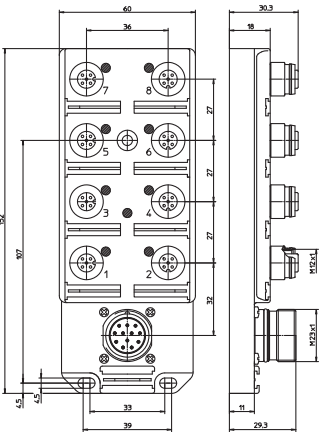









ASBS 6/LED




ASBS 8/LED

Pluggable M12 Rugged Distribution Boxes


Technical Information

Product Description		
Type	ASBS-R	ASBS-R... LED
	<div></div> <div><div><div>CSA</div><div>UL</div><div></div><div></div></div><div><div></div><div></div><div></div></div></div>	<div></div> <div><div><div>CSA</div><div>UL</div><div></div><div></div></div><div><div></div><div></div><div></div></div></div>
Description	ASBS-R pluggable actuator/sensor distributor, 4 and 8 ports, M12 socket, 4-poles, 1 signal per socket, earth connection, M23 connection for the control cable, 12-poles	ASBS-R pluggable actuator/sensor distributor, 4 and 8 ports, M12 socket, 4-poles, with LED operating and function display, 1 signal per socket, earth connection, M23 connection for the control cable, 12-poles
Technical Data		
Environmental Temperature	-40°C to +80°C (for drag-chain applications -25°C to +60°C), UL max. +60°C	
Housing Material	Made of die-cast zinc; potting compound: 2K PUR	
Contact Insert	M12: PA, potted; M23: PBT	
Contact	CuZn, pre-nickel and gold-plated	
Mechanical Data		
Protection Class	IP65/IP67	
Electrical Data		
Volume Resistance	≤ 5 mΩ	
Rated Voltage	11 to 30 V DC	
Rated Current	4 A per outlet/12 A max. total	
Included in Delivery		
M12 Dust Covers	2 pieces	
Attachable Labels	4 ports: 5 pieces, 8 ports: 10 pieces	

Wiring Diagram ASBS-R...

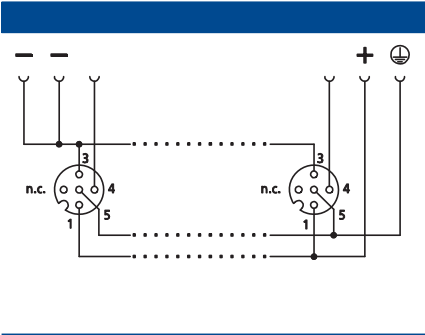


Wiring Diagram ASBS-R... LED

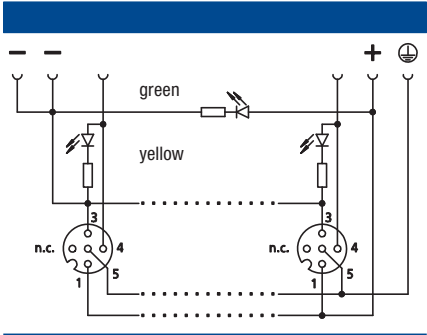


## Pin Assignment

## 4 Ports


$$\begin{array}{l} 1 = 11 (+) \\ 2 = \text{n.c.} \\ 3 = 9 \quad \begin{array}{l} \diagup \\ 10 \end{array} (-) \\ 4 = 1 (1) \\ \quad 2 (2) \\ \quad 3 (3) \\ \quad 4 (4) \\ 5 = 12 (\text{PE}) \end{array}$$


## 8 Ports


$$\begin{array}{l} 1 = 11 (+) \\ 2 = \text{n.c.} \\ 3 = 9 \quad \bigcup (-) \\ \quad 10 \end{array}$$


4 = 1 (1)  
2 (2)  
3 (3)  
4 (4)  
5 (5)  
6 (6)  
7 (7)  
8 (8)  
5 = 12 (PE)

### Ordering Designation

Ordering Designation	Performance
ASBS-R 4 5-4	4 ports
ASBS-R 8 5-4	8 ports
ASBS-R 4/LED 5-4	4 ports
ASBS-R 8/LED 5-4	8 ports

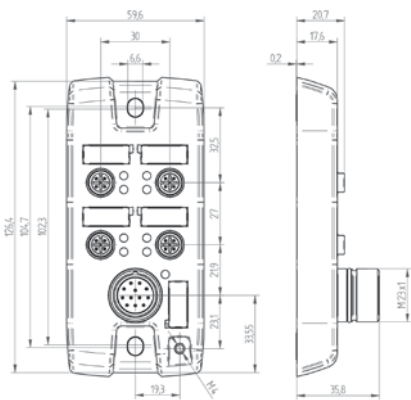

ASBS-R 4/ASBS-R 4 LED

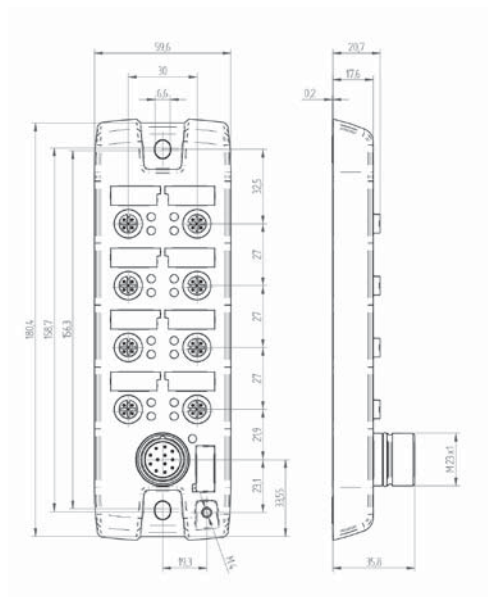
















ASBS-R 8/ASBS-R 8 LED




The application of these products in harsh environments should always be checked before use.  
Technical modifications reserved.

## Pluggable M12 Rugged Distribution Boxes




### Technical Information

Product Description			
Type	ASBSV...	ASBSV... LED	ASBSVD 8/LED W5
	<div></div> 	<div></div> 	<div></div> 
Description	ASB-Classic pluggable actuator/sensor distribution box, 4, 6 and 8 ports, combined FIXCON®/M12 socket, 5-poles, 2 signals per socket, earth connection, M23 connection for the control cable, 19-poles	ASB-Classic pluggable actuator/sensor distribution box with LED operation and function indicators, 4, 6 and 8 ports, combined FIXCON®/M12 socket, 5-poles, 2 signals per socket, earth connection, M23 connection for the control cable, 19-poles	ASB-M pluggable actuator/sensor distribution box with LED operation and function indicators, 8 ports, with integrated electronic fuses with 500 mA for outputs, 100 mA for inputs and diagnostic display, combined FIXCON®/M12 socket, 5-poles, earth connection, M23 connection for the control cable, 19-poles
Technical Data			
Environmental Temperature	-15°C to +80°C		0°C to +60°C
Housing Material	TPU, self-extinguishing		PBT
Contact Insert	PA GF, self-extinguishing		PA
Contact	CuZn, pre-nickel and gold-plated M8, M12		
Mechanical Data			
Protection Class	IP67		
Electrical Data			
Volume Resistance	≤ 5 mΩ		
Rated Voltage	10 to 30 V DC	60 V DC	10 to 30 V DC
Rated Current	4 A per outlet/12 A max. total	4 A per outlet/10 A max. total	7.5 A max. total
Included in Delivery			
M12 Dust Covers	2 pieces		
Attachable Labels	10 pieces		


### Wiring Diagram ASBSV...

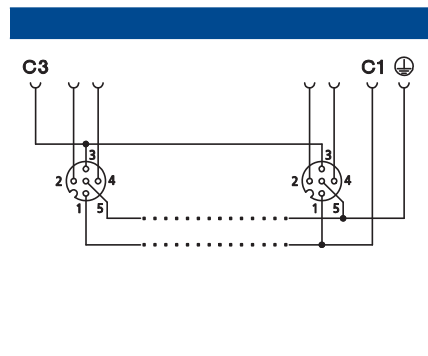




### Pin Assignment ASBSV...

4 Ports	6 Ports	8 Ports
 1 = 19 (C1) 2 = 1 (7) 2 (4) 3 (8) 4 (14) 3 = 6 (C3) 4 = 1 (15) 2 (5) 3 (16) 4 (3) 5 = 12 (PE)	 1 = 19 (C1) 2 = 1 (7) 2 (4) 3 (8) 4 (14) 5 (9) 6 (13) 3 = 6 (C3) 4 = 1 (15) 2 (5) 3 (16) 4 (3) 5 (17) 6 (2) 5 = 12 (PE)	 1 = 19 (C1) 2 = 1 (7) 2 (4) 3 (8) 4 (14) 5 (9) 6 (13) 7 (10) 8 (18) 3 = 6 (C3) 4 = 1 (15) 2 (5) 3 (16) 4 (3) 5 (17) 6 (2)


### Wiring Diagram ASBSV... LED

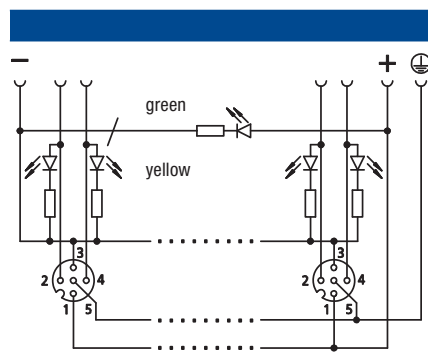

### Pin Assignment ASBSV... LED

4 Ports	6 Ports	8 Ports
 1 = 19 (+) 2 = 1 (7) 2 (4) 3 (8) 4 (14) 3 = 6 (-) 4 = 1 (15) 2 (5) 3 (16) 4 (3) 5 = 12 (PE)	 1 = 19 (+) 2 = 1 (7) 2 (4) 3 (8) 4 (14) 5 (9) 6 (13) 3 = 6 (-) 4 = 1 (15) 2 (5) 3 (16) 4 (3) 5 (17) 6 (2) 5 = 12 (PE)	 1 = 19 (+) 2 = 1 (7) 2 (4) 3 (8) 4 (14) 5 (9) 6 (13) 7 (10) 8 (18) 3 = 6 (-) 4 = 1 (15) 2 (5) 3 (16) 4 (3) 5 (17) 6 (2)

Pin Assignment ASBSVD 8/LED W5

8 Ports			
	1 = +24 V (19)	Channel B	Channel A
	3 = 0 V (6)		
	5 = 12 (PE)	2 = 1 (7)	4 = 1 (15)
		2 (4)	2 (5)
		3 (8)	3 (16)
		4 (14)	4 (3)
		5 (9)	5 (17)
		6 (13)	6 (2)
		7 (10)	7 (11)
		DIA (18)	8 (1)


Ordering Designation

Ordering Designation	Performance
ASBSV 4 5	4 ports
ASBSV 6 5	6 ports
ASBSV 8 5	8 ports
ASBSV 4/LED 5	4 ports


Diagnostic Indication ASBSVD 8/LED W5

LED	Indicator	Condition
1...8 A/B DIA	Yellow/white	Function
1...8 A/B DIA	Red	Periphery error*
PWR	Green	System power supply


\* The peripheral error is sent as a collective message via the supply line to the control system. This message can be evaluated by the control system and issued as an error message. Therefore there is no channel B available for socket 8.

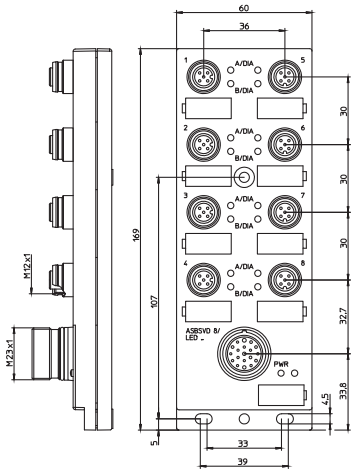


ASBSVD 8/LED W5

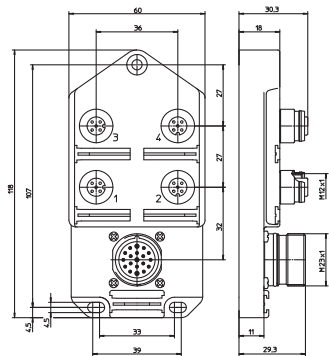


ASBSV 4

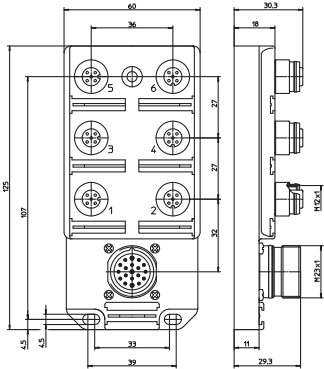


ASBSV 6

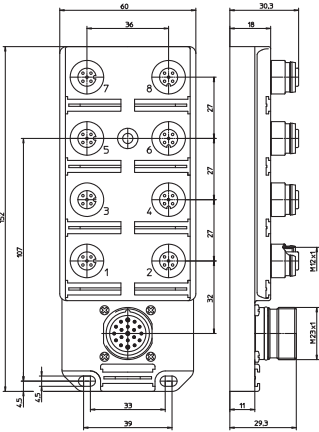


ASBSV 8

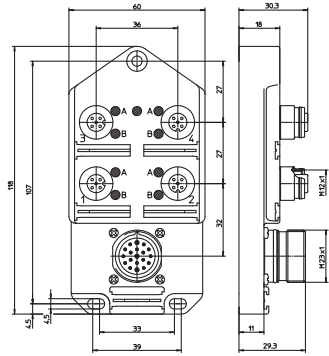

ASBSV 4/LED

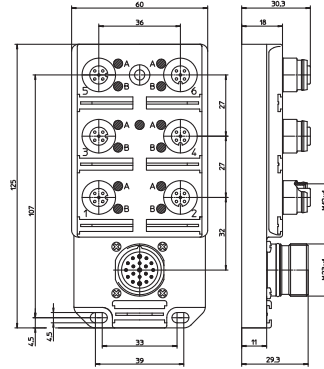



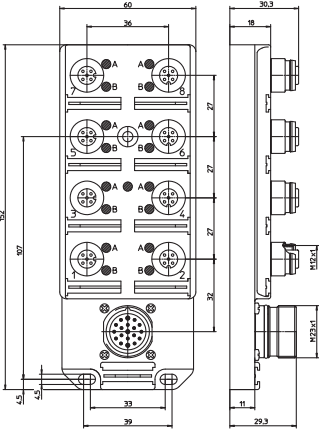









ASBSV 6/LED




ASBSV 8/LED

Pluggable M12 Rugged Distribution Boxes


Technical Information

Product Description		
Type	ASBSV-R	ASBSV-R... LED
	<div></div> <div><div><div>CSA</div><div>UL</div><div></div><div></div></div><div><div></div><div></div><div></div></div></div>	<div></div> <div><div><div>CSA</div><div>UL</div><div></div><div></div></div><div><div></div><div></div><div></div></div></div>
Description	ASB-R pluggable actuator/sensor distributor, 4 and 8 ports, M12 socket, 5-poles, 2 signals per socket, earth connection, M23 connection for the control cable, 19-poles	ASB-R pluggable actuator/sensor distributor, 4 and 8 ports, M12 socket, 5-poles, with LED operating and function display, 2 signals per socket, earth connection, M23 connection for the control cable, 19-poles
Technical Data		
Environmental Temperature	-40°C to +80°C (for drag-chain applications -25°C to +60°C), UL max. +60°C	
Housing Material	Made of die-cast zinc; potting compound: 2K PUR	
Contact Insert	M12: PA, potted; M23: PBT	
Contact	CuZn, pre-nickel and gold-plated	
Mechanical Data		
Protection Class	IP65/IP67	
Electrical Data		
Volume Resistance	≤ 5 mΩ	
Rated Voltage	11 to 30 V DC	
Rated Current	4 A per outlet/12 A max. total	
Included in Delivery		
M12 Dust Covers	2 pieces	
Attachable Labels	4 ports: 5 pieces, 8 ports: 10 pieces	



Wiring Diagram ASBSV-R...

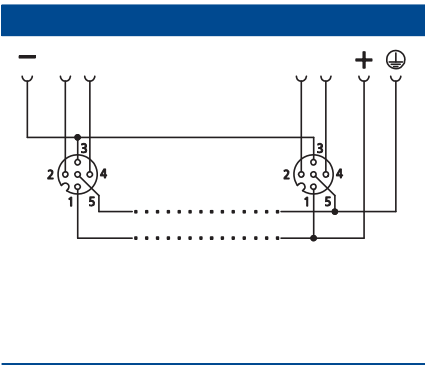

Wiring Diagram ASBSV-R... LED

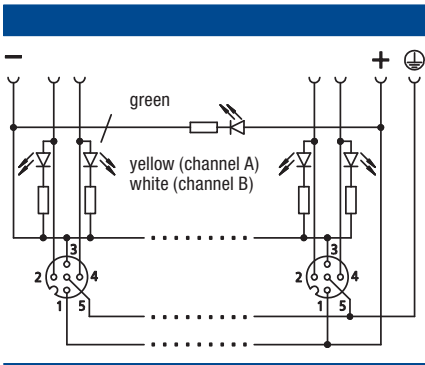


Pin Assignment

4 Ports		8 Ports	
	1 = 19 (+) 2 = 1 (7) 3 = 2 (4) 4 = 3 (8) 5 = 4 (14) 6 = 5 (6) (-) 7 = 1 (15) 8 = 2 (5) 9 = 3 (16) 10 = 4 (3) 11 = 5 (12) (PE)		1 = 19 (+) 2 = 1 (7) 3 = 2 (4) 4 = 3 (8) 5 = 4 (14) 6 = 5 (9) 7 = 6 (13) 8 = 7 (10) 9 = 8 (18) 10 = 3 = 6 (-) 11 = 4 = 1 (15) 12 = 2 (5) 13 = 3 (16) 14 = 4 (3) 15 = 5 (17) 16 = 6 (2) 17 = 7 (11) 18 = 8 (1) 19 = 5 = 12 (PE)





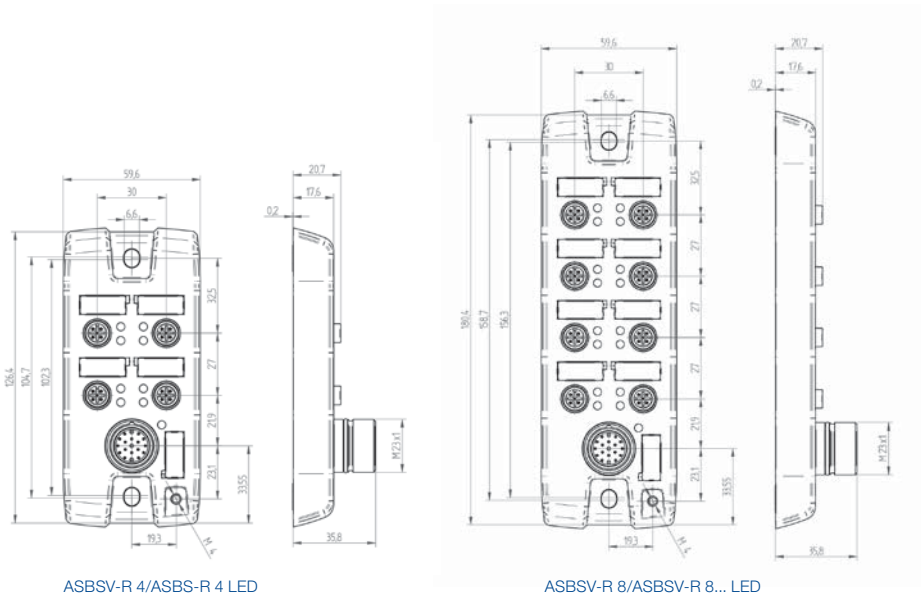





Ordering Designation

Ordering Designation	Performance
ASBSV-R 4 5	4 ports
ASBSV-R 8 5	8 ports
ASBSV-R 4/LED 5	4 ports
ASBSV-R 8/LED 5	8 ports




Wired M8 Rugged Distribution Boxes






Technical Information

Product Description		
Type	ASBM... LED	SB 8/LED
	<div></div> <div></div>	<div></div> <div></div>
Description	ASB-S wired miniature actuator/sensor distribution box with LED operation and function indicators, 4, 6, 8, 10 and 12 ports, M8 socket, 3-poles, 1 signal per socket, with integrated control cable, PUR jacket, halogen-free, black	ASB-Classic wired miniature actuator/sensor distribution box with LED operation and function indicators, 8 ports, M8 socket, 3-poles, 1 signal per socket, with integrated control cable, PUR jacket, halogen-free, black
Technical Data		
Environmental Temperature	-25°C to +70°C	-15°C to +80°C
Housing Material	PBT	TPU
Contact Insert	PA, self-extinguishing	
Contact	CuZn, pre-nickel- and gold-plated M8, M12	
Mechanical Data		
Protection Class	IP67	
Electrical Data		
Volume Resistance	≤ 5 mΩ	
Rated Voltage	10 to 30 V DC	
Rated Current	1.5 A per outlet/1.5 A max. total	2 A per outlet/2 A max. total
Included in Delivery		
M8 Dust Covers	2 pieces	
Attachable Labels	4 ports: 5 pieces 6 to 8 ports: 10 pieces 10 to 12 ports: 15 pieces	1 piece

Wiring Diagram ASBM... LED

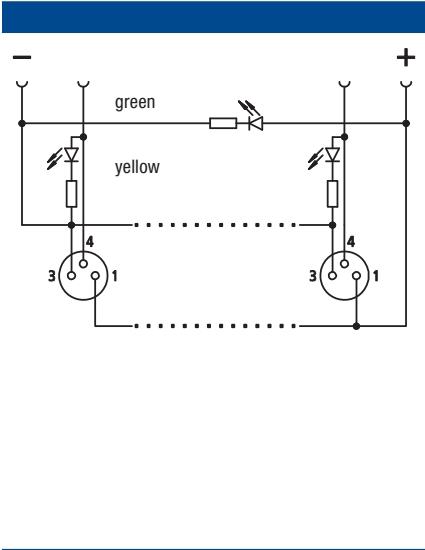


Pin Assignment ASBM... LED

4 Ports	6 Ports	8 Ports
 <ul style="list-style-type: none"><li>1 = brown (+)</li><li>3 = blue (-)</li><li>4 = white (1)</li><li>green (2)</li><li>yellow (3)</li><li>grey (4)</li></ul>	 <ul style="list-style-type: none"><li>1 = brown (+)</li><li>3 = blue (-)</li><li>4 = white (1)</li><li>green (2)</li><li>yellow (3)</li><li>grey (4)</li><li>pink (5)</li><li>red (6)</li></ul>	 <ul style="list-style-type: none"><li>1 = brown (+)</li><li>3 = blue (-)</li><li>4 = white (1)</li><li>green (2)</li><li>yellow (3)</li><li>grey (4)</li><li>pink (5)</li><li>red (6)</li><li>black (7)</li><li>violet (8)</li></ul>
10 Ports	12 Ports	
 <ul style="list-style-type: none"><li>1 = brown (+)</li><li>3 = blue (-)</li><li>4 = white (1)</li><li>green (2)</li><li>yellow (3)</li><li>grey (4)</li><li>pink (5)</li><li>red (6)</li><li>black (7)</li><li>violet (8)</li><li>grey/pink (9)</li><li>red/blue (10)</li></ul>	 <ul style="list-style-type: none"><li>1 = brown (+)</li><li>3 = blue (-)</li></ul> <ul style="list-style-type: none"><li>4 = white (1)</li><li>green (2)</li><li>yellow (3)</li><li>grey (4)</li><li>pink (5)</li><li>red (6)</li><li>black (7)</li><li>violet (8)</li><li>grey/pink (9)</li><li>red/blue (10)</li><li>white/green (11)</li><li>brown/green (12)</li></ul>	




Pin Assignment SB 8/LED

8 Ports



- 1 = brown (+)
- 3 = blue (-)
- 4 = white (1)
- green (2)
- yellow (3)
- grey (4)
- pink (5)
- red (6)
- black (7)
- violet (8)

Wiring Diagram SB 8/LED

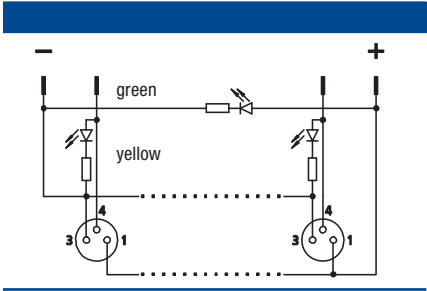


Ordering Designation


Ordering Designation	Performance
ASBM 4/LED 3-343/... M	4 ports
ASBM 6/LED 3-344/... M	6 ports
ASBM 8/LED 3-345/... M	8 ports

Standard lengths ASBM: 5, 10 and 15 meter.  
Standard lengths SB: 5 and 10 meter.  
Other cable lengths or cable specifications on request.


Ordering Designation	Performance
ASBM 10/LED 3-346/... M	10 ports
ASBM 12/LED 3-347/... M	12 ports
SB 8/LED 3-333/... M	8 ports

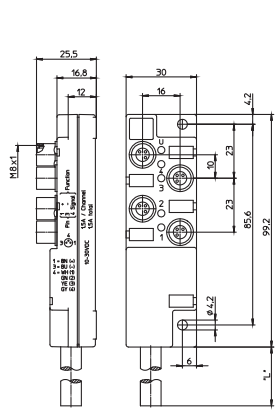


ASBM 4/LED

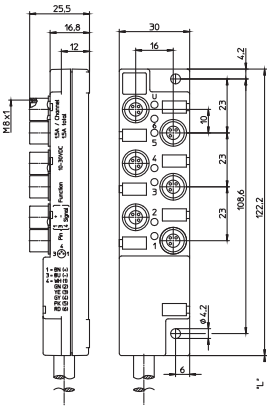


ASBM 6/LED

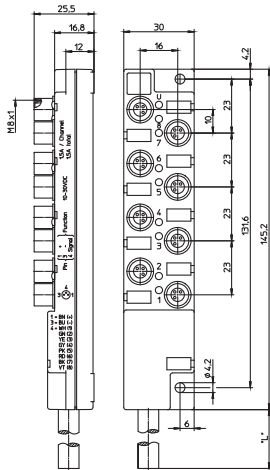


ASBM 8/LED

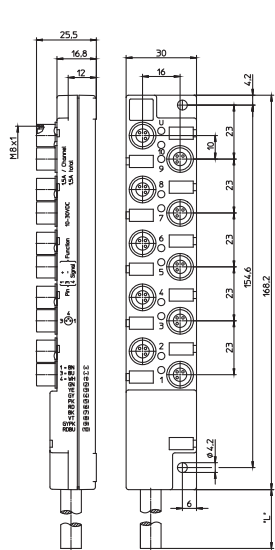

ASBM 10/LED

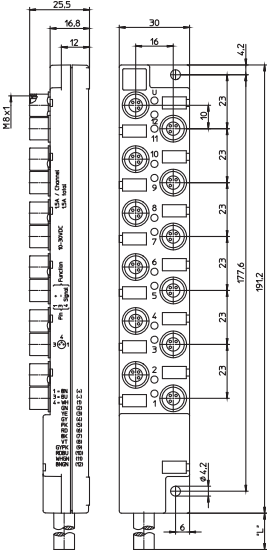



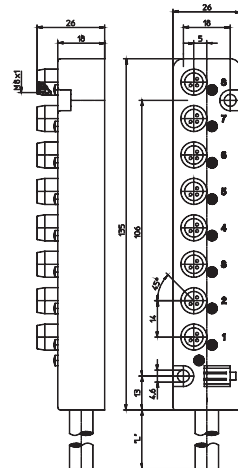




ASBM 12/LED




SB 8/LED

## Wired M12 Rugged Distribution Boxes




### Technical Information

Product Description		
Type	ASB...	ASB... LED
	<div></div>	<div></div>
Description	ASB-Classic wired actuator/sensor distribution box, 4, 6 and 8 ports, combined FIXCON®/M12 socket, 4-poles, 1 signal per socket, no LED, earth connection, with integrated control cable, PUR jacket, halogen-free, black	ASB-Classic wired actuator/sensor distribution box with LED operation and function indicators, 4, 6 and 8 ports, combined FIXCON®/M12 socket, 4-poles, 1 signal per socket, earth connection, with integrated control cable, PUR jacket, halogen-free, black
Technical Data		
Environmental Temperature	-15°C to +80°C	
Housing Material	TPU	
Contact Insert	PA GF, self-extinguishing	
Contact	CuZn, pre-nickel and gold-plated M8, M12	
Mechanical Data		
Protection Class	IP67	
Electrical Data		
Volume Resistance	≤ 5 mΩ	
Rated Voltage	60 V DC	10 to 30 V DC
Rated Current	4 A per outlet/12 A max. total	
Included in Delivery		
M12 Dust Covers	2 pieces	
Attachable Labels	10 pieces	


### Wiring Diagram ASB...

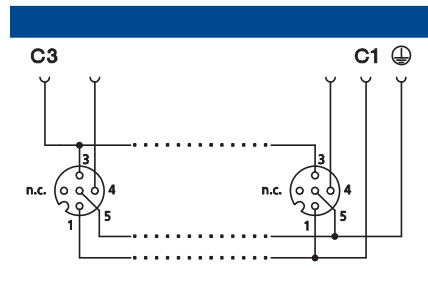




### Pin Assignment ASB...

4 Ports	6 Ports	8 Ports
 <ul style="list-style-type: none"> <li>1 = brown (C1)</li> <li>2 = n.c.</li> <li>3 = blue (C3)</li> <li>4 = white (1)</li> <li>green (2)</li> <li>yellow (3)</li> <li>grey (4)</li> <li>5 = green/yellow (PE)</li> </ul>	 <ul style="list-style-type: none"> <li>1 = brown (C1)</li> <li>2 = n.c.</li> <li>3 = blue (C3)</li> <li>4 = white (1)</li> <li>green (2)</li> <li>yellow (3)</li> <li>grey (4)</li> <li>pink (5)</li> <li>red (6)</li> <li>5 = green/yellow (PE)</li> </ul>	 <ul style="list-style-type: none"> <li>1 = brown (C1)</li> <li>2 = n.c.</li> <li>3 = blue (C3)</li> <li>4 = white (1)</li> <li>green (2)</li> <li>yellow (3)</li> <li>grey (4)</li> <li>pink (5)</li> <li>red (6)</li> <li>black (7)</li> <li>violet (8)</li> <li>5 = green/yellow (PE)</li> </ul>

### Wiring Diagram ASB... LED

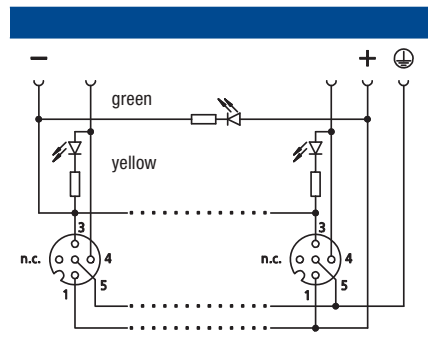

### Pin Assignment ASB... LED


4 Ports	6 Ports	8 Ports
 <ul style="list-style-type: none"> <li>1 = brown (+)</li> <li>2 = n.c.</li> <li>3 = blue (-)</li> <li>4 = white (1)</li> <li>green (2)</li> <li>yellow (3)</li> <li>grey (4)</li> <li>5 = green/yellow (PE)</li> </ul>	 <ul style="list-style-type: none"> <li>1 = brown (+)</li> <li>2 = n.c.</li> <li>3 = blue (-)</li> <li>4 = white (1)</li> <li>green (2)</li> <li>yellow (3)</li> <li>grey (4)</li> <li>pink (5)</li> <li>red (6)</li> <li>5 = green/yellow (PE)</li> </ul>	 <ul style="list-style-type: none"> <li>1 = brown (+)</li> <li>2 = n.c.</li> <li>3 = blue (-)</li> <li>4 = white (1)</li> <li>green (2)</li> <li>yellow (3)</li> <li>grey (4)</li> <li>pink (5)</li> <li>red (6)</li> <li>black (7)</li> <li>violet (8)</li> <li>5 = green/yellow (PE)</li> </ul>

Ordering Designation


Ordering Designation	Performance
ASB 4 5-4-328/... M	4 ports
ASB 6 5-4-330/... M	6 ports
ASB 8 5-4-331/... M	8 ports

Standard lengths: 5 and 10 meter.  
Other cable lengths or cable specifications on request.


Ordering Designation	Performance
ASB 4/LED 5-4-328/... M	4 ports
ASB 6/LED 5-4-330/... M	6 ports
ASB 8/LED 5-4-331/... M	8 ports

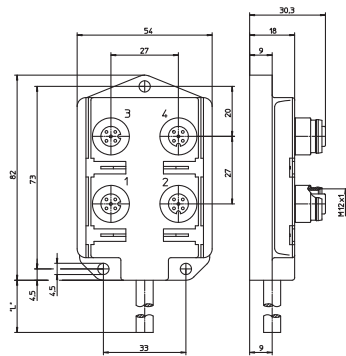


ASB 4

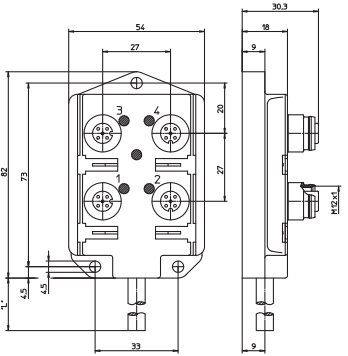


ASB 4/LED

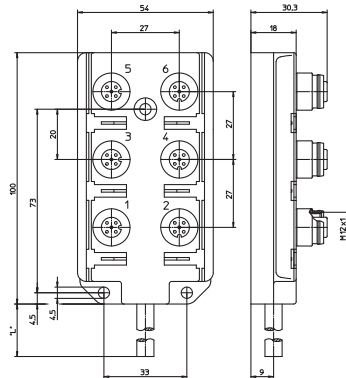


ASB 6

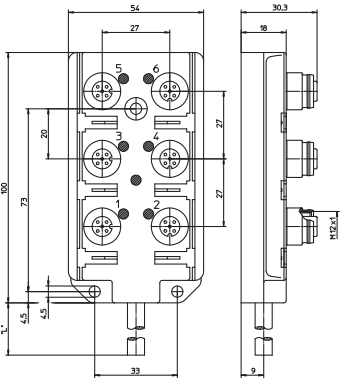

ASB 6/LED

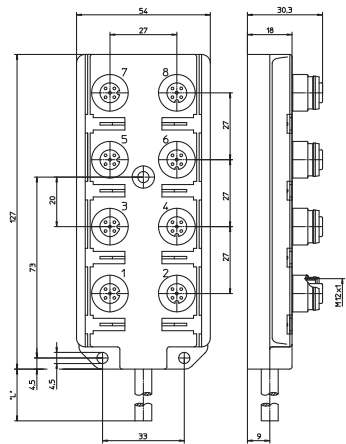

ASB 8

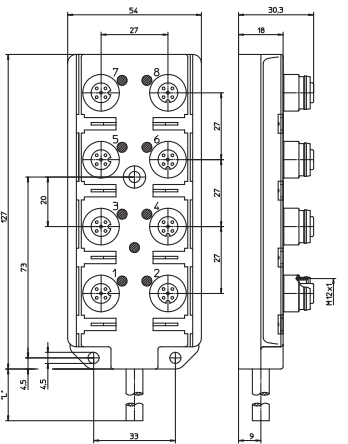













ASB 8/LED




Wired M12 Rugged Distribution Boxes


Technical Information

Product Description		
Type	ASB-R	ASB-R... LED
	<div></div> <div><div><div>CSA</div><div>UL</div><div></div><div></div></div><div><div></div><div></div><div></div></div></div>	<div></div> <div><div><div>CSA</div><div>UL</div><div></div><div></div></div><div><div></div><div></div><div></div></div></div>
Description	ASB-R wired actuator/sensor distributor, 4 and 8 ports, M12 socket, 4-poles, 1 signal per socket, earth connection, with integrated control cable, PUR jacket, halogen-free, black	ASB-R wired actuator/sensor distributor, 4 and 8 ports, M12 socket, 4-poles, with LED operating and function display, 1 signal per socket, earth connection, with integrated control cable, PUR jacket, halogen-free, black
Technical Data		
Environmental Temperature	-40°C to +80°C (for drag-chain applications -25°C to +60°C), UL max. +60°C	
Housing Material	Made of die-cast zinc; potting compound: 2K PUR	
Contact Insert	M12: PA, potted; M23: PBT	
Contact	CuZn, pre-nickeled and gold-plated	
Mechanical Data		
Protection Class	IP65/IP67	
Electrical Data		
Volume Resistance	≤ 5 mΩ	
Rated Voltage	11 to 30 V DC	
Rated Current	4 A per outlet/12 A max. total	
Included in Delivery		
M12 Dust Covers	2 pieces	
Attachable Labels	4 ports: 5 pieces, 8 ports: 10 pieces	



Wiring Diagram ASB-R...

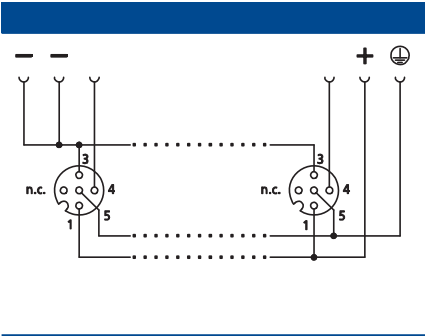

Wiring Diagram ASB-R... LED

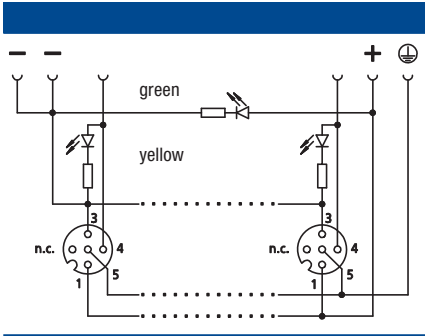


Pin Assignment

4 Ports	8 Ports
 <ul style="list-style-type: none"><li>1 = brown (+)</li><li>2 = n.c.</li><li>3 = blue (-)</li><li>4 = white (1) green (2) yellow (3) grey (4)</li><li>5 = green/yellow (PE)</li></ul>	 <ul style="list-style-type: none"><li>1 = brown (+)</li><li>2 = n.c.</li><li>3 = blue (-)</li><li>4 = white (1) green (2) yellow (3) grey (4) pink (5) red (6) black (7) violet (8)</li><li>5 = green/yellow (PE)</li></ul>

Ordering Designation





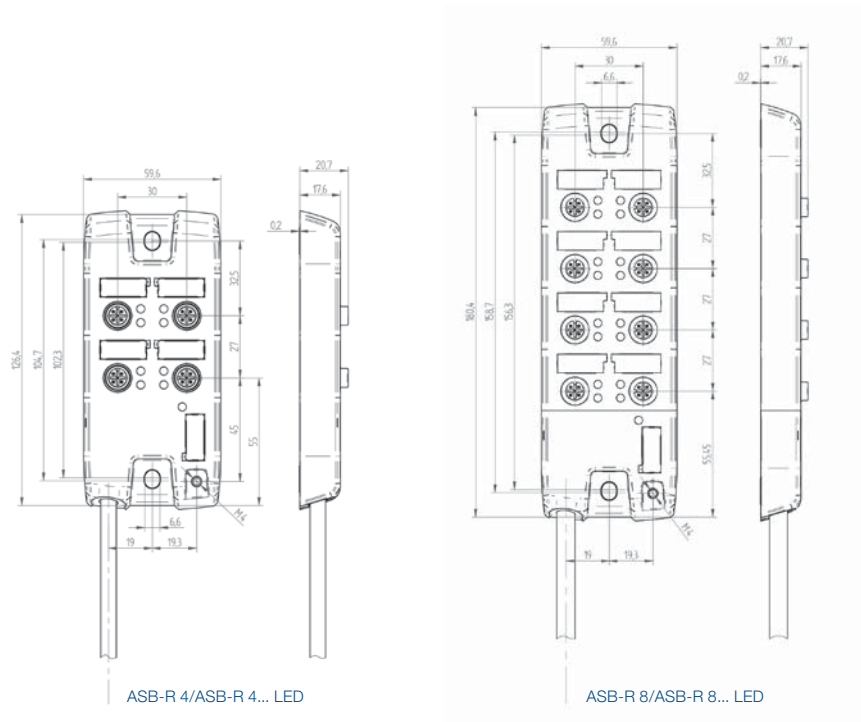



Ordering Designation	Performance
ASB-R 4 5-4-328/... M	4 ports
ASB-R 8 5-4-331/... M	8 ports
ASB-R 4/LED 5-4-328/... M	4 ports
ASB-R 8/LED 5-4-331/... M	8 ports

Standard lengths: 5 and 10 meter.  
Other cable lengths or cable specifications on request.




## Wired M12 Rugged Distribution Boxes




### Technical Information

Product Description		
Type	ASBV...	ASBV... LED
	<div></div>	<div></div>
Description	ASB-Classic wired actuator/sensor distribution box, 4, 6 and 8 ports, no LED, combined FIXCON®/M12 socket, 5-poles, 2 signals per socket, earth connection, with integrated control cable, PUR jacket, halogen-free, black	ASB-Classic wired actuator/sensor distribution box, 4, 6 and 8 ports with LED operation and function indicators, combined FIXCON®/M12 socket, 5-poles, 2 signals per socket, earth connection, with integrated control cable, PUR jacket, halogen-free, black
Technical Data		
Environmental Temperature	-15°C to +80°C	
Housing Material	TPU	
Contact Insert	PA GF, self-extinguishing	
Contact	CuZn, pre-nickel and gold-plated M8, M12	
Mechanical Data		
Protection Class	IP67	
Electrical Data		
Volume Resistance	≤ 5 mΩ	
Rated Voltage	60 V DC	10 to 30 V DC
Rated Current	4 A per outlet/12 A max. total	
Included in Delivery		
M12 Dust Covers	2 pieces	
Attachable Labels	10 pieces	


### Wiring Diagram ASBV...

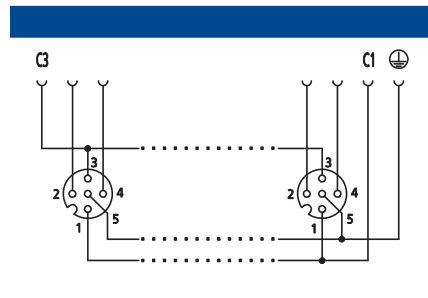




### Pin Assignment ASBV...

4 Ports	6 Ports	8 Ports
 <ul style="list-style-type: none"> <li>1 = brown (C1)</li> <li>2 = n.c.</li> <li>3 = blue (C3)</li> <li>4 = white (1)</li> <li>green (2)</li> <li>yellow (3)</li> <li>grey (4)</li> <li>5 = green/yellow (PE)</li> </ul>	 <ul style="list-style-type: none"> <li>1 = brown (C1)</li> <li>2 = n.c.</li> <li>3 = blue (C3)</li> <li>4 = white (1)</li> <li>green (2)</li> <li>yellow (3)</li> <li>grey (4)</li> <li>pink (5)</li> <li>red (6)</li> <li>5 = green/yellow (PE)</li> </ul>	 <ul style="list-style-type: none"> <li>1 = brown (C1)</li> <li>2 = n.c.</li> <li>3 = blue (C3)</li> <li>4 = white (1)</li> <li>green (2)</li> <li>yellow (3)</li> <li>grey (4)</li> <li>pink (5)</li> <li>red (6)</li> <li>black (7)</li> <li>violet (8)</li> <li>5 = green/yellow (PE)</li> </ul>

### Wiring Diagram ASBV... LED

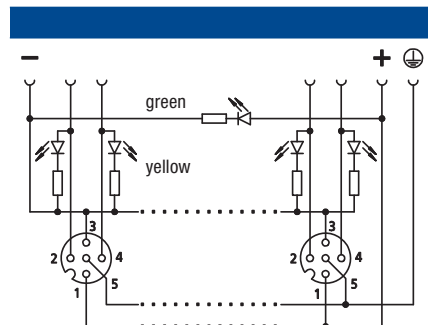

### Pin Assignment ASBV... LED


4 Ports	6 Ports	8 Ports
 <ul style="list-style-type: none"> <li>1 = brown (C1)</li> <li>2 = grey/pink (1)</li> <li>red/blue (2)</li> <li>white/green (3)</li> <li>brown/green (4)</li> <li>3 = blue (C3)</li> <li>4 = white (1)</li> <li>green (2)</li> <li>yellow (3)</li> <li>grey (4)</li> <li>5 = green/yellow (PE)</li> </ul>	 <ul style="list-style-type: none"> <li>1 = brown (C1)</li> <li>2 = grey/pink (1)</li> <li>red/blue (2)</li> <li>white/green (3)</li> <li>brown/green (4)</li> <li>white/yellow (5)</li> <li>yellow/brown (6)</li> <li>3 = blue (C3)</li> <li>4 = white (1)</li> <li>green (2)</li> <li>yellow (3)</li> <li>grey (4)</li> <li>pink (5)</li> <li>red (6)</li> <li>5 = green/yellow (PE)</li> </ul>	 <ul style="list-style-type: none"> <li>1 = brown (C1)</li> <li>2 = grey/pink (1)</li> <li>red/blue (2)</li> <li>white/green (3)</li> <li>brown/green (4)</li> <li>white/yellow (5)</li> <li>yellow/brown (6)</li> <li>white/grey (7)</li> <li>grey/brown (8)</li> <li>3 = blue (C3)</li> <li>4 = white (1)</li> <li>green (2)</li> <li>yellow (3)</li> <li>grey (4)</li> <li>pink (5)</li> <li>red (6)</li> <li>black (7)</li> <li>violet (8)</li> <li>5 = green/yellow (PE)</li> </ul>

Ordering Designation


Ordering Designation	Performance
ASBV 4 5-256/... M	4 ports
ASBV 6 5-332/... M	6 ports
ASBV 8 5-242/... M	8 ports

Ordering Designation	Performance
ASBV 4/LED 5-256/... M	4 ports
ASBV 6/LED 5-332/... M	6 ports
ASBV 8/LED 5-242/... M	8 ports


Standard lengths ASBV: 5 and 10 meter. • Standard lengths ASBV...LED: 5, 10 and 15 meter.  
Other cable lengths or cable specifications on request.

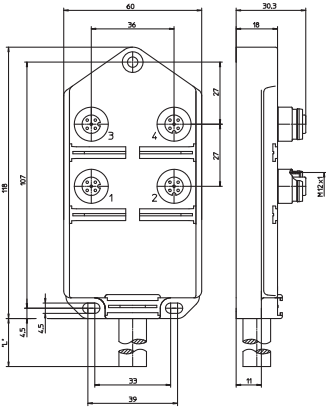


ASBV 4

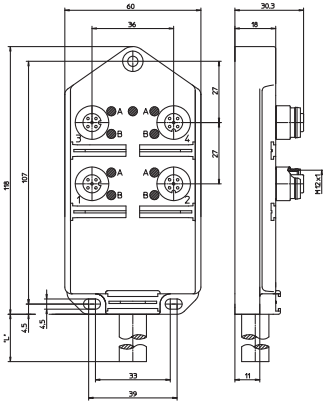


ASBV 4/LED

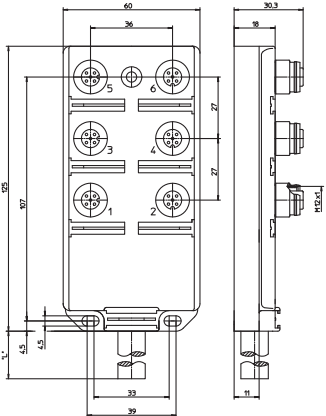


ASBV 6

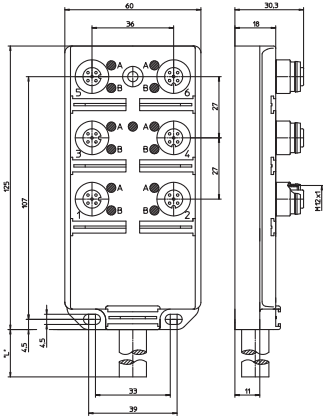

ASBV 6/LED

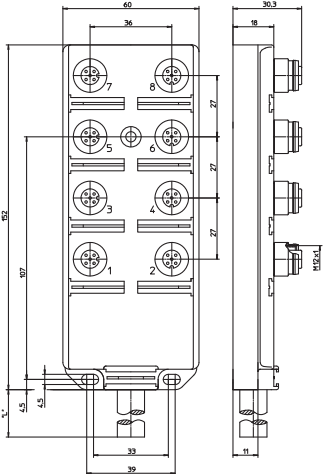

ASBV 8

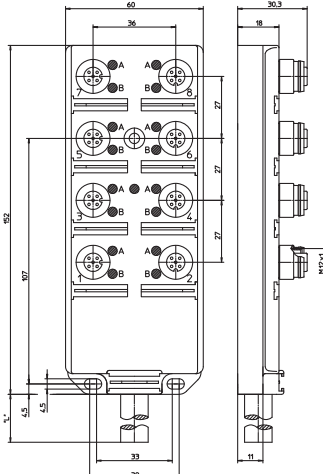













ASBV 8/LED




Wired M12 Rugged Distribution Boxes


Technical Information

Product Description		
Type	ASBV-R	ASBV-R... LED
	<div><div><div>CSA</div><div>UL</div><div></div><div></div><div></div><div></div><div></div></div></div>	<div><div><div>CSA</div><div>UL</div><div></div><div></div><div></div><div></div><div></div></div></div>
Description	ASB-R wired actuator/sensor distributor, 4 and 8 ports, M12 socket, 5-poles, 2 signals per socket, earth connection, with integrated control cable, PUR jacket, halogen-free, black	ASB-R wired actuator/sensor distributor, 4 and 8 ports, M12 socket, 5-poles, with LED operating and function display, 2 signals per socket, earth connection, with integrated control cable, PUR jacket, halogen-free, black
Technical Data		
Environmental Temperature	-40°C to +80°C (for drag-chain applications -25°C to +60°C), UL max. +60°C	
Housing Material	Made of die-cast zinc; potting compound: 2K PUR	
Contact Insert	M12: PA, potted; M23: PBT	
Contact	CuZn, pre-nickel and gold-plated	
Mechanical Data		
Protection Class	IP65/IP67	
Electrical Data		
Volume Resistance	≤ 5 mΩ	
Rated Voltage	11 to 30 V DC	
Rated Current	4 A per outlet/12 A max. total	
Included in Delivery		
M12 Dust Covers	2 pieces	
Attachable Labels	4 ports: 5 pieces, 8 ports: 10 pieces	

Wiring Diagram ASBV-R...

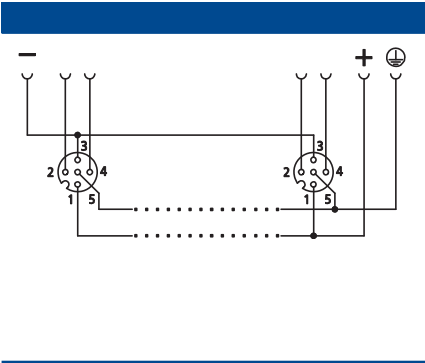

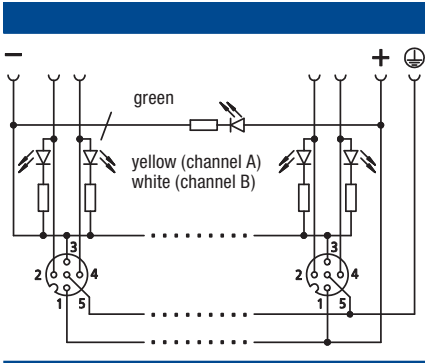

Wiring Diagram ASBV-R... LED






## Pin Assignment

<b>4 Ports</b>	<b>8 Ports</b>
 <p>1 = brown (+)            2 = grey/pink (1)              red/blue (2)              white/green (3)              brown/green (4)            3 = blue (-)            4 = white (1)              green (2)              yellow (3)              grey (4)            5 = green/yellow (PE)</p>	 <p>1 = brown (+)            2 = grey/pink (1)              red/blue (2)              white/green (3)              brown/green (4)              white/yellow (5)              yellow/brown (6)              white/grey (7)              grey/brown (8)            3 = blue (-)            4 = white (1)              green (2)              yellow (3)              grey (4)              pink (5)              red (6)              black (7)              violet (8)            5 = green/yellow (PE)</p>

### Ordering Designation

Ordering Designation	Performance
ASBV-R 4 5-256/... M	4 ports
ASBV-R 8 5-242/... M	8 ports
ASBV-R 4/LED 5-256/... M	4 ports
ASBV-R 8/LED 5-242/... M	8 ports



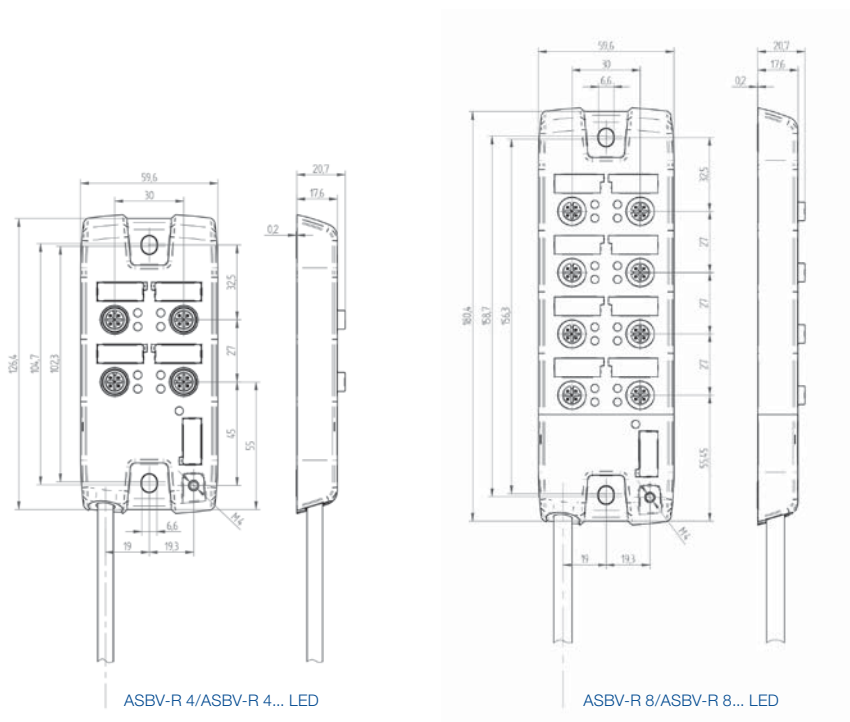



Standard lengths: 5 and 10 meter.  
Other cable lengths or cable specifications on request.




The application of these products in harsh environments should always be checked before use.  
Technical modifications reserved.

# Wired M12 Rugged Distribution Boxes


## Technical Information

Product Description			
Type	RSWU 12-SB 8/LED 3-333/5M	RSWU 12-ASB 8/LED 5-4-331/5M	ASB 8/LED 5-4/1,5 M
	 	 	 
Description	ASB-Classic wired miniature sensor distribution box, 8 ports, with LED operating and function display, M8 socket, 3-poles, 1 signal per socket, integrated control cable with M23 male right angle connector, 12-poles, PUR jacket, halogen-free, black	ASB-Classic wired actuator/sensor distribution box, 8 ports, with LED operating and function display, combined FIXCON®/M12 socket, 4-poles, 1 signal per socket, earth connection, integrated control cable, 5 m PUR jacket, halogen-free, black, earth connection, integrated control cable with M23 male right angle connector, 12-poles	ASB-Classic wired actuator/sensor distribution box with LED operation and function indicators and single wire connection on the rear, 8 ports, combined FIXCON®/M12 socket, 4-poles, 1 signal per socket, earth connection
Technical Data			
Environmental Temperature	-15°C to +80°C		
Housing Material	TPU		
Contact Insert	PA GF, self-extinguishing		
Contact	CuZn, pre-nickel and gold-plated M8, M12		
Mechanical Data			
Protection Class	IP67		
Electrical Data			
Volume Resistance	≤ 5 mΩ		
Rated Voltage	10 to 30 V DC	60 V DC	10 to 30 V DC
Rated Current	4 A per outlet/8 A max. total	2 A per outlet/2 A max. total	4 A per outlet/12 A max. total
Included in Delivery			
M12 Dust Covers	2 pieces		
Attachable Labels	10 pieces		


## Pin Assignment RSWU

12-poles

1 = white 2 = green 3 = yellow 4 = grey 5 = grey/pink 6 = red/blue 7 = white/green 8 = brown/green 9 = blue 10 = blue 11 = brown 12 = yellow/green


## Pin Assignment 12-SB 8/LED

8 Ports

1 = brown (+) 3 = blue (-) 4 = white (1) green (2) yellow (3) grey (4) pink (5) red (6) black (7) violet (8)


## Pin Assignment 12-ASB 8/LED

8 Ports

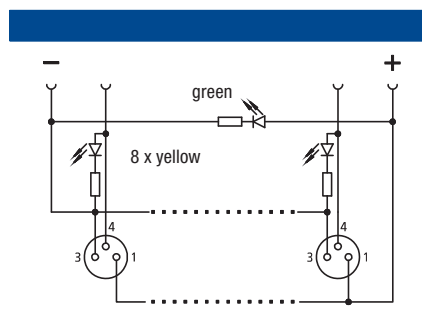1 = brown (+) 2 = n.c. 3 = blue (-) 4 = white (1) green (2) yellow (3) grey (4) pink (5) red (6) black (7) violet (8) 5 = green/yellow (PE)

## Wiring Diagram 12-SB 8/LED

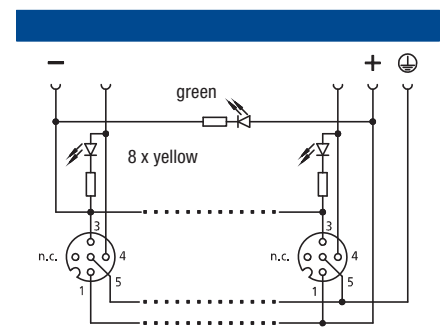

## Wiring Diagram 12-ASB 8/LED




### ASB 8/LED 5-4/1,5 M

## 8 Ports



- 1 = brown (+)  
2 = n.c.  
3 = blue (-)  
4 = white (1)  
green (2)  
yellow (3)  
grey (4)  
pink (5)  
red (6)  
black (7)  
violet (8)  
5 = green/yellow (PE)


## Wiring Diagram

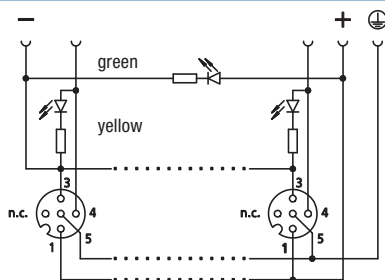**ASB 8/LED 5-4/1,5 M**


### Ordering Designation

Ordering Designation	Performance
ASB 8/LED 5-4/1,5 M	8 ports
RSWU 12-SB 8/LED 3-333/5 M	8 ports
RSWU 12-ASB 8/LED 5-4-331/5 M	8 ports


Other cable lengths or cable specifications on request.

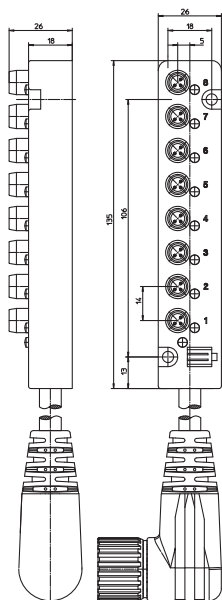

RSWU 12-SB 8/LED 3-333

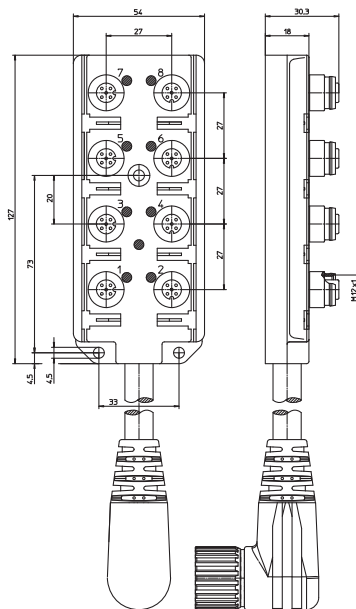

RSWU 12-ASB 8/LED 5-4-331

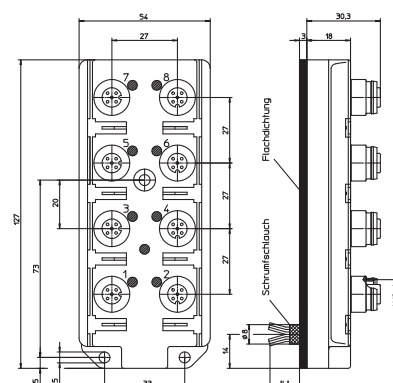









ASB 8/LED


The application of these products in harsh environments should always be checked before use.  
Technical modifications reserved.

Wired M12 Rugged Distribution Boxes – Stainless Steel


Technical Information

Product Description		
Type	ASNBV 8/LED	ASNBL 8/LED
	<div><div><div>UL</div><div></div><div></div><div></div></div></div>	<div><div><div>UL</div><div></div><div></div><div></div></div></div>
Description	ASB-N wired actuator/sensor distribution box, stainless steel, 8 ports, with LED operation and function indicators, M12 socket, 5-poles, 2 signals per socket, integrated control cable	ASB-N wired actuator/sensor distribution box, stainless steel, 8 ports, with lateral ports, with LED operation and function indicators, M12 socket, 5-poles, 2 signals per socket, integrated control cable, PVC, black
Note	Especially designed for food and beverage equipment.	
Technical Data		
Environmental Temperature	-25°C to +70°C	
Housing Material	Stainless steel	
Contact Insert	PVC	
Contact	CuZn, pre-nickel and gold-plated	
Mechanical Data		
Protection Class	IP67/IP69K	
Electrical Data		
Volume Resistance	≤ 5 mΩ	
Rated Voltage	10 to 30 V DC	
Rated Current	4 A per outlet/12 A max. total	
Included in Delivery		
M12 Dust Covers	4 pieces	

Wiring Diagram ASNBV 8/LED

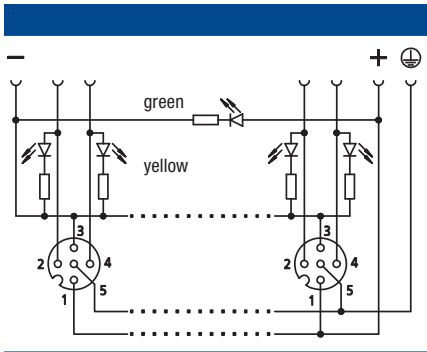

Pin Assignment ASNBV 8/LED

8 Ports		
	1 = brown (+) 2 = grey/pink (1) red/blue (2) white/green (3) brown/green (4) white/yellow (5) yellow/brown (6) white/grey (7) grey/brown (8)	3 = blue (-) 4 = white (1) green (2) yellow (3) grey (4) pink (5) red (6) black (7) violet (8) 5 = green/yellow (PE)


### Pin Assignment ASNBL 8/LED

## 8 Ports



- 1 = brown (+)      4 = white (1)  
2 = n.c.              green (2)  
3 = blue (-)        yellow (3)  
                         grey (4)  
                         pink (5)  
                         red (6)  
                         black (7)  
                         violet (8)  
5 = green/yellow (PE)


### Wiring Diagram ASNBL 8/LED

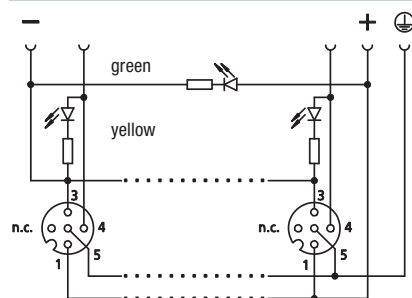


### Ordering Designation

Ordering Designation	Performance
ASNBV 8/LED 5-278/... M	8 ports
ASNB 8/LED 5-4-320/... M	8 ports

Standard lengths: 5, 10 and 15 meter.  
Other cable lengths or cable specifications on request.

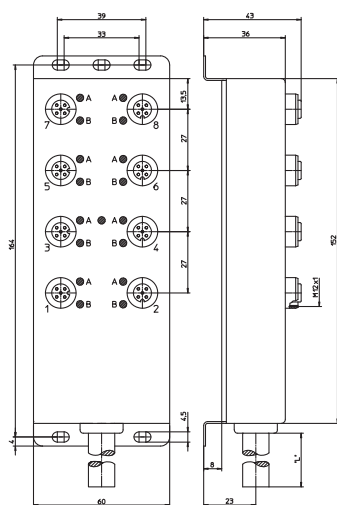

ASN BV 8/LED

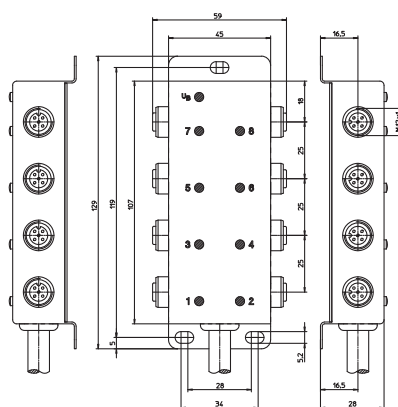

ASNBL 8/LED



The application of these products in harsh environments should always be checked before use.  
Technical modifications reserved.





# Part Number Index

**Be certain. Belden.**

## **Consulting and Support**

Which wiring methods are you using? Belden can help you transition from a traditional point-to-point wiring system to a decentralized wiring concept using passive distribution boxes or active fieldbus or Ethernet I/O modules.

Write to us at: [support-automation@belden.com](mailto:support-automation@belden.com)

## Part Number Index

Part Number	Designation	Page
107972	0910 ASL 146	98
10919	0910 ASL 403	94
26819	0910 ASL 408	96
26823	0910 ASL 409	92
26821	0910 ASL 410	96
44429	0910 ASL 412	92
52858	0910 ASL 425	98
107971	0910 ASL 438	96
30606	0910 ASL 501	92
54153	0930 CSL 107	74
54154	0930 CSL 108	72
54186	0930 CSL 109	72
54187	0930 CSL 113	76
54188	0930 CSL 114	74
84418	0930 CSL 650	76
85918	0930 CSL 651	72
29950	0930 DSL 107	60
29794	0930 DSL 108	56
29796	0930 DSL 109	56
51889	0930 DSL 113	64
53718	0930 DSL 114	60
45133	0930 DSL 311	62
45134	0930 DSL 312	58
45135	0930 DSL 313	58
50629	0930 DSL 314	64
53746	0930 DSL 315	62
75853	0930 DSL 650	66
75854	0930 DSL 651	54
75849	0930 DSL 700	66
75850	0930 DSL 701	54
89975	0940 CSL 601	108
89974	0940 DSL 601	108
105689	0940 ESL 601	104
87058	0940 PSL 601	106
106172	0940 PSL 602	106
104873	0940 PSL 603	106
92356	0942 UEM 600	114
93201	0942 UEM 601	110
108105	0942 UEM 602	112
108106	0942 UEM 612	112
108053	0942 UEM 620	114
102076	0942 UEM 630	120
102080	0942 UEM 631	120
87040	0942 UEM 650	116
87043	0942 UEM 651	110
104872	0942 UEM 670	116
93199	0942 UEM 700	118
93198	0942 UEM 701	110
105165	0942 UEM 780/5 M	118
102840	0942 UEM 782/1 M	112
102163	0942 UEM 783	122

Part Number	Designation	Page
10988	0950 ISL 201	84
10989	0950 ISL 202	82
10990	0950 ISL 203	86
10991	0950 ISL 204	82
10992	0950 ISL 205	82
25110	0950 ISL 207	84
50201	0950 ISL 209	86
27075	0970 PSL 111	34
27076	0970 PSL 112	40
27077	0970 PSL 113	44
28335	0970 PSL 114	34
54285	0970 PSL 123	44
54190	0970 PSL 124	40
75851	0970 PSL 650	48
75852	0970 PSL 651	36
75514	0970 PSL 700	48
75848	0970 PSL 701	36
934770001	0970 PSL 811-PB-DP 16DI-M12-R	38
934770002	0970 PSL 812-PB-DP 16DO-M12-R	42
934770003	0970 PSL 813-PB-DP 8DI8DO-M12-R	46
934692001	0980 ESL 801-PNET 16DI-M12-R	14
934691001	0980 ESL 811-EIP 16DI-M12-R	24
109628	0980 ESL 700	18
109629	0980 ESL 701	14
109627	0980 ESL 710	28
109630	0980 ESL 711	24
934692002	0980 ESL 802-PNET 16DO-M12-R	16
934692003	0980 ESL 803-PNET 8DI/8DO-M12-R	16
934691002	0980 ESL 812-EIP 16DO-M12-R	26
934691003	0980 ESL 813-EIP 8DI/8DO-M12-R	26
60640	ASB 4 5-4-328/5 M	142
60555	ASB 4 5-4-328/10 M	142
60644	ASB 4/LED 5-4-328/5 M	142
60643	ASB 4/LED 5-4-328/10 M	142
60583	ASB 6 5-4-330/5 M	142
60580	ASB 6 5-4-330/10 M	142
60600	ASB 6/LED 5-4-330/5 M	142
60656	ASB 6/LED 5-4-330/10 M	142
60585	ASB 8 5-4-331/5 M	142
60584	ASB 8 5-4-331/10 M	142
11116	ASB 8/LED 5-4/1,5 M	150
60603	ASB 8/LED 5-4-331/5 M	142
60602	ASB 8/LED 5-4-331/10 M	142
65349	ASBM 4/LED 3-343/5 M	140
65350	ASBM 4/LED 3-343/10 M	140
65351	ASBM 4/LED 3-343/15 M	140
65352	ASBM 6/LED 3-344/5 M	140
65353	ASBM 6/LED 3-344/10 M	140
65354	ASBM 6/LED 3-344/15 M	140
65355	ASBM 8/LED 3-345/5 M	140
65356	ASBM 8/LED 3-345/10 M	140



Part Number	Designation	Page
65357	ASBM 8/LED 3-345/15 M	140
65358	ASBM 10/LED 3-346/5 M	140
65359	ASBM 10/LED 3-346/10 M	140
65360	ASBM 10/LED 3-346/15 M	140
65361	ASBM 12/LED 3-347/5 M	140
65362	ASBM 12/LED 3-347/10 M	140
65363	ASBM 12/LED 3-347/15 M	140
934758001	ASB-R 4 5-4-328/5 M	144
934758002	ASB-R 4 5-4-328/10 M	144
934758003	ASB-R 4/LED 5-4-328/5 M	144
934758004	ASB-R 4/LED 5-4-328/10 M	144
934760001	ASB-R 8 5-4-331/5 M	144
934760002	ASB-R 8 5-4-331/10 M	144
934760003	ASB-R 8/LED 5-4-331/5 M	144
934760004	ASB-R 8/LED 5-4-331/10 M	144
11126	ASBS 4/LED 5-4	132
11127	ASBS 6 5-4	132
11128	ASBS 6/LED 5-4	132
11129	ASBS 8 5-4	132
11130	ASBS 8/LED 5-4	132
53499	ASBS 8/LED 5-4/4E-4A	132
65305	ASBSM 4/LED 3	130
65346	ASBSM 6/LED 3	130
65347	ASBSM 8/LED 3	130
65348	ASBSM 10/LED 3	130
934761001	ASBS-R 4	134
934761002	ASBS-R 4/LED	134
934763001	ASBS-R 8	134
934763002	ASBS-R 8/LED	134
11133	ASBSV 4 5	136
11134	ASBSV 4/LED 5	136
11135	ASBSV 6 5	136
11136	ASBSV 6/LED 5	136
11137	ASBSV 8 5	136
11138	ASBSV 8/LED 5	136
75653	ASBSVD 8/LED W 5	136
934767001	ASBSV-R 4 5	139
934767002	ASBSV-R 4/LED 5	139
934769001	ASBSV-R 8 5	139
934769002	ASBSV-R 8/LED 5	139
60605	ASBV 4 5-256/5 M	146
60604	ASBV 4 5-256/10 M	146
11147	ASBV 4/LED 5-256/5 M	146
11145	ASBV 4/LED 5-256/10 M	146
11146	ASBV 4/LED 5-256/15 M	146
60669	ASBV 6 5-332/5 M	146
60666	ASBV 6 5-332/10 M	146
60674	ASBV 6/LED 5-332/5 M	146
60672	ASBV 6/LED 5-332/10 M	146
60673	ASBV 6/LED 5-332/15 M	146
60671	ASBV 8 5-242/5 M	146

Part Number	Designation	Page
60670	ASBV 8 5-242/10 M	146
11167	ASBV 8/LED 5-242/5 M	146
11165	ASBV 8/LED 5-242/10 M	146
11166	ASBV 8/LED 5-242/15 M	146
934764001	ASBV-R 4 5-256/5 M	148
934764002	ASBV-R 4 5-256/10 M	148
934764003	ASBV-R 4/LED 5-256/5 M	148
934764004	ASBV-R 4/LED 5-256/10 M	148
934765001	ASBV-R 8 5-242/5 M	148
934765002	ASBV-R 8 5-242/10 M	148
934765003	ASBV-R 8/LED 5-242/5 M	148
934765004	ASBV-R 8/LED 5-242/10 M	148
58453	ASNBL 8/LED 5-4-320/5 M	152
58459	ASNBL 8/LED 5-4-320/10 M	152
58460	ASNBL 8/LED 5-4-320/15 M	152
38552	ASNBV 8/LED 5-278/5 M	152
30608	ASNBV 8/LED 5-278/10 M	152
38551	ASNBV 8/LED 5-278/15 M	152
60720	RSWU 12-ASB 8/LED 5-4-331/5 M	150
60724	RSWU 12-SB 8/LED 3-333/5 M	150
60637	SB 8/LED 3-333/5 M	140
60636	SB 8/LED 3-333/10 M	140
12124	SBS 4/LED 3	130

**Explanation of Product Characteristics**

UL approved



CSA approved



Very good resistance to oils, coolants and lubricants as well as emulsions



Very good vibration and shock resistance



Suitable for use in drag chains in compliance with Lumflex® drag chain test



Very good resistance to flying welding sparks (e.g. unfinished constructions)



Very good resistance to acids, lyes and chemical cleaning agents



Very good electromagnetic resistance (EMC) and shielded systems





# lumbergautomation

A BELDEN BRAND

[www.lumberg-automation.com](http://www.lumberg-automation.com)

## GLOBAL LOCATIONS

For more information, please visit us at:  
[www.beldensolutions.com](http://www.beldensolutions.com)



**Be certain  
you stay  
in touch.**

### EUROPE/MIDDLE EAST/AFRICA

#### Germany – Head Office

Phone: +49-2355-50 44 000  
[icos-sales@belden.com](mailto:icos-sales@belden.com)

#### Russia

Phone: +7-495-287-1391/-1392  
[info@belden.ru](mailto:info@belden.ru)

#### The Netherlands

Phone: +31-773-878-555  
[venlo.salesinfo@belden.com](mailto:venlo.salesinfo@belden.com)

#### France

Phone: +33-389-71 98 06  
[LACinfo.fr@belden.com](mailto:LACinfo.fr@belden.com)

#### Spain

Phone: +34-91-746-17-30  
[madrid.salesinfo@belden.com](mailto:madrid.salesinfo@belden.com)

#### United Arab Emirates

Phone: +971-4-391-0490  
[dubai.salesinfo@belden.com](mailto:dubai.salesinfo@belden.com)

#### Italy

Phone: +39-039-5965-250  
[info.milano@belden.com](mailto:info.milano@belden.com)

#### Sweden

Phone: +46-40-699-88-60  
[icos-sales@belden.com](mailto:icos-sales@belden.com)

#### United Kingdom

Phone: +44-161-498 37 49  
[manchester.salesinfo@belden.com](mailto:manchester.salesinfo@belden.com)

### AMERICAS

#### USA

Phone: 800-235-3361 or  
1-800-BELDEN1  
[info.lumberg@belden.com](mailto:info.lumberg@belden.com)

#### Canada

Phone: 800-235-3362 or  
1-800-BELDEN2  
[info.lumberg@belden.com](mailto:info.lumberg@belden.com)

### ASIA/PACIFIC

#### China

Phone: +86-21-5445-2388  
[China.Marketing@belden.com](mailto:China.Marketing@belden.com)

#### Singapore

Phone: +65-6879-9800  
[sales.roap@belden.com](mailto:sales.roap@belden.com)