



## Product information ELST 400L/12 093 Au 932 416-106


Nama	EI CT 4001 /42 002 Av.
Name	ELST 400L/12 093 Au
	Appliance connector for M12 sensors, press-in tube mounting, with vent hole
<b>Delivery informations</b>	
Availability	available
Product description	
Description	Appliance connector for M12 sensors, press-in tube mounting, with vent hole
Туре	ELST 400L/12 093 Au
Order No.	932 416-106
Other standard types	tinned contacts,
	order no. 932 416-206
Type of contact	male
Number of contacts	4
Standard	IEC 61076-2-101 (Ed. 1)/ IEC 60947-5-2
Housing Color	grey
Technical data	
Pin dimensions	1 mm
Rated voltage	AC/DC 150 V
Rated current	4A
Type of termination	solder, concave pins
Suitable cables	max. 0.5 mm <sup>2</sup>
Material	<u></u>
Contact material	Cu Zn
Contact surface material	Au
Contact bearer material	PA PA
0-Ring	NBR
Environmental conditions	' en la companya de
Protection class (IEC 60529)	IP 67
Pollution severity	3
Temperature range	-25 °C to +90 °C
Inflammability class	
Contact bearer	94 V-2
Approvals	
UL	UL
Packing unit	
Packaging unit	100 pieces

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture

Drawing

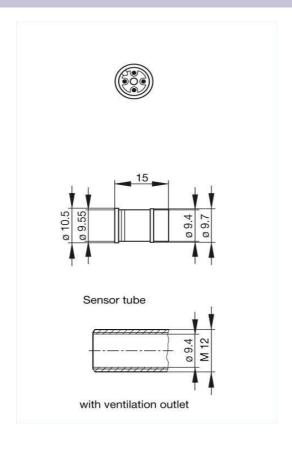

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.