




(h) HIRSCHMANN

GSN 20 schwarz/black GDM-series:Type B EN 175301-803 (DIN 43650) / ISO 6952

Product description	
Description	appliance connector with, central screws (hollow), 1 screw M 3 x 4
Туре	GSN 20 schwarz/black
Order No.	932 421-100
Number of contacts	2 + PE
Standard	DIN EN 175 301-803-B
Housing Color	black
Construction type	В
Drawing	

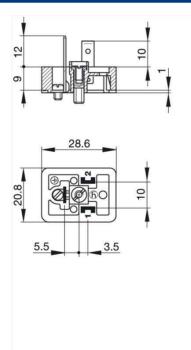

Technical data	
Rated voltage	AC/DC 250 V
Rated current	16 A
Contact resistance	<= 4 mOhm
Type of termination	solder (ground contacts: screw)
Mounting	screw
Material	
Contact surface material	Sn
Contact bearer material	PA
Housing material	PA
Environmental conditions	

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Pollution severity	3
Temperature range	-40 °C to +125 °C
Inflammability class	
Housing	94 V-1
Contact bearer	94 HB
Approvals	
UR	UR
VDE	VDE
SEV	SEV
Packing unit	
Packaging unit	50 pieces
Scope of delivery and	l accessories
Accessories to order se	eparately (NBR) flat gasket GSN 20-3,

(NBR) flat gasket GSN 20-3, Order No. 733 275-002; (EPDM) flat gasket GSN 20-6, Order No. 733 270-004

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.