



Product information GO 070 FA M schwarz/black 932 470-100


Name	GO 070 FA M schwarz/black
	Curface respected expected with floors with solder contacts.
Delivery informations	Surface mounted connector with flange with solder contacts
Availability	available
Product description	available
Description	Surface mounted connector with flange with solder contacts
Туре	GO 070 FA M schwarz/black
Order No.	932 470-100
Type of contact	male
Number of contacts	7
Standard	DIN VDE 0627 / IEC 61984
Housing Color	black
Technical data	uidus
Pin dimensions	1,6 mm (diameter)
Rated voltage	AC/DC 50 V
Rated current	DC 6 A / AC 10 A
Contact resistance	<= 4 m0hm
Type of termination	soldering
Mounting	screws
Material	
Contact surface material	Sn
Contact bearer material	PA
Housing material	PA PA
Environmental conditions	
Protection class (IEC 60529)	IP 65
Pollution severity	3
Temperature range	-40 °C to +90 °C
Inflammability class	
Housing	94 V-1
Contact bearer	94 V-1
Packing unit	
Packaging unit	100 pieces
Scope of delivery and accessories	
Scope of delivery	1 surface mounted connector, 1 flat gasket
Accessories to order separately	can be plugged into GO 070 WF schwarz/black

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture

Drawing

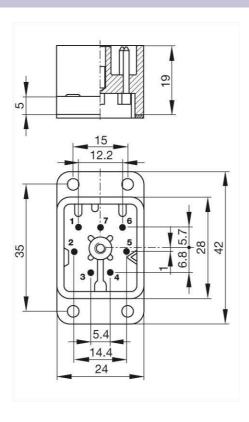

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.