



## Product information GDME 2013 grau/grey 933 030-106


lame	GDME 2013 grau/grey
	cable socket with central screw M 3 x 40, strain relief and transparent cover, possibility to fit electronic inserts
Delivery informations	
Availability	available
Product description	
Description	cable socket with central screw M 3 x 40, strain relief and transparent cover, possibility to fit electronic inserts
Гуре	GDME 2013 grau/grey
Order No.	933 030-106
Other standard types	black housing, Order no. 933 030-100
Number of contacts	2 + PE
Cable gland	PG 13.5 (grey)
Conductor size	max. 1.5 mm <sup>2</sup>
Standard	DIN EN 175 301-803-A
lousing Color	grau, mit transparentem Deckel
Construction type	A
Technical data	
Pin dimensions	6.3 mm x 0.8 mm, 4.8 mm x 0.8 mm
Rated voltage	AC 400 V, DC 250 V without inserts
Rated current	16 A
Contact resistance	<= 4 m0hm
Type of termination	screw
Suitable cables	10 mm to 14 mm diameter
Mounting	central nut
Material	
Contact surface material	Sn
Contact bearer material	PA
lousing material	PA
Environmental conditions	
Protection class (IEC 60529)	IP 65 (gasket necessary)
Pollution severity	3
lemperature range	-40 °C to +85 °C
nflammability class	
lousing	94 V-1
Contact bearer	94 V-1
Approvals	
/DE	VDE
SEV	SEV
GL	GL
Packing unit	
Packaging unit	50 pieces

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture

Drawing

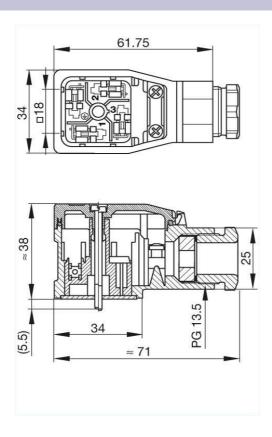

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.