

## **b** HIRSCHMANN

Product information ELWIKA 5012 PG7 933 175-100

ELWIKA 5012 PG7




	Angled cable socket, unassembled, strain relief by means of clamping cage
Delivery informations	
Availability	available
Product description	
Description	Angled cable socket, unassembled,
	strain relief by means of clamping cage
Туре	ELWIKA 5012 PG7
Order No.	933 175-100
Type of contact	female
Number of contacts	5
Cable gland	PG 7
Standard	IEC 61076-2-101 (Ed. 1)/ IEC 60947-5-2
Housing Color	black
Technical data	
Rated voltage	AC/DC 50 V
Rated current	4 A
Type of termination	SCREW
Suitable cables	diameter 4 mm to 6 mm, max. 0.75 mm <sup>2</sup>
Material	
Contact material	Cu Zn
Contact surface material	Sn Sn
Contact bearer material	PA
Housing material	PA
Coupling nut material	Zn Al/Ni
0-Ring	NBR
Environmental conditions	
Protection class (IEC 60529)	IP 67
Pollution severity	3
Temperature range	-25 °C to +90 °C
Inflammability class	
Housing	94 V-2
Contact bearer	94 V-2
Packing unit	
Packaging unit	100 pieces
Scope of delivery and accessories	
Accessories to order separately	protective cap M12 VS,
	order no. 734 209-100

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.

Name



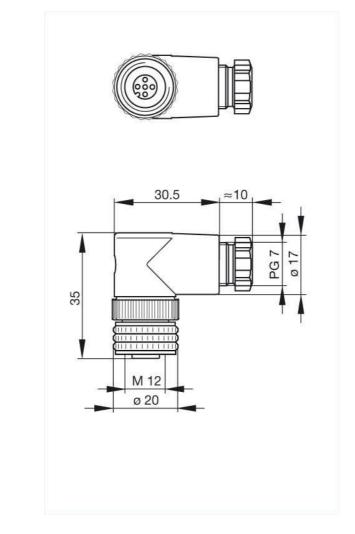

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.

Picture Drawing