



Product information GDML 3011 LED 230 RG grau/grey 933 748-712


ame	GDML 3011 LED 230 RG grau/grey
	don't bott the fide grading by
	function indicator (glow lamp) (2 LED's) for pressure switch
Delivery informations	
Availability	available
Product description	
Description	function indicator (glow lamp) (2 LED's) for pressure switch
Туре	GDML 3011 LED 230 RG grau/grey
Order No.	933 748-712
Other standard types	transparent housing, cable gland black: Order no. 933 748-212
Number of contacts	3 + PE
Cable gland	PG 11 (grey)
Conductor size	max. 1.5 mm ²
Standard	DIN EN 175 301-803-A
lousing Color	transparent
Construction type	A
Description of Wiring	· ·
.ED color	LED green (3)LED red (2)
Other characteristics	for pressure switch
Technical data	
Pin dimensions	6.3 mm x 0.8 mm, 4.8 mm x 0.8 mm
Rated voltage	AC/DC 250 V
Rated current	8 A
Contact resistance	<= 4 m0hm
ype of termination	screw
Suitable cables	4.5 mm to 11 mm diameter
Nounting	central nut
Naterial	
Contact surface material	Sn
Contact bearer material	PA
lousing material	PA PA
invironmental conditions	
Protection class (IEC 60529)	IP 65 (gasket necessary)
Collution severity	3
emperature range	-40 °C to +90 °C
nflammability class	
lousing	94 HB
ontact bearer	94 HB
Packing unit	
ackaging unit	50 pieces
cope of delivery and accessories	
ccessories to order separately	(NBR) flat gasket GDM 3-7, Order no. 730 801-002; (EPDM) flat gasket GDM 3-21, Order no. 731 739-004; profiled gasket GDM 3-16, Order no. 731 531

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture

Drawing

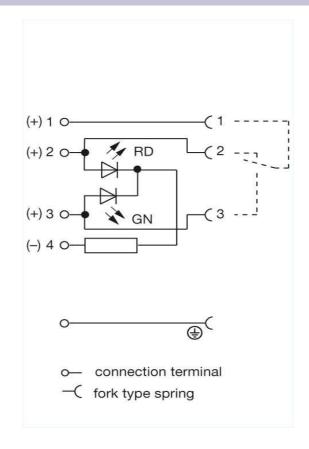

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.