



## Product information RKW - RKW 30-01/5 M 13758

Name	RKW
Delivery informations	Actuator/sensor cordset, 7/8" female connector, right angle version, with self-locking threaded joint and molded cable, PVC cable, orange, 3 poles, 5 meters
Delivery informations Availability	available
	avanane
Product description	RKW 30-01/5 M
Type	
Order No.	13758  Artistic/copper conduct 7/0" famely copperator right angle varsion, with colf looking threaded joint and molded cable, DVC cable, example 2 pales 5 materials.
Description Number of contests	Actuator/sensor cordset, 7/8" female connector, right angle version, with self-locking threaded joint and molded cable, PVC cable, orange, 3 poles, 5 meter
Number of contacts	3
Color of housing	orange O'lessistes of
Product characteristics	Vibration resistance, Oil resistance
Mechanical data	
Type of plug-in contact	Female connector
Design of housing	angled
Thread	7/8"
Design of electrical connection	connector 7/8 inch
LED display present	×
Environmental conditions	1000 0000
Environmental temperature	-40 °C 90 °C
Degree of protection (IP), mounted	IP68
Pollution degree	3
Materials	TWO and a strangelistic
Housing material / Molded body	TPU, self-extinguishing
Contact bearer material	TPU, self-extinguishing
Contact material	CuZn
Contact material - Surface refinement	silver-plated and 0.3 microns gold-plated
Knurled screw / nut material	PA PA
Electrical data	
Contact resistance	≤5 mΩ
Rated current In	12 A at 40°C, UL and notice derating
Nominal voltage	240 V
Rated voltage	250 V
Test voltage	2 kV eff./60 s
Insulation resistance	>1 GΩ
Approvals	
RoHS 2002/95/EG compliant	RoHS 2002/95/EG
Cable	
Cable length	5 m
Cable number	01
Cable description	Cable for sensors and actuators
Color of jacket	orange
Material of outer jacket	PVC
Outer diameter of the cable	7.20 mm
Nominal diameter of the cable	3 x 0.75 mm <sup>2</sup>
Construction of conductor	22 x 0.2 mm

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.




Flame resistant according to standard

none

Picture

Drawing

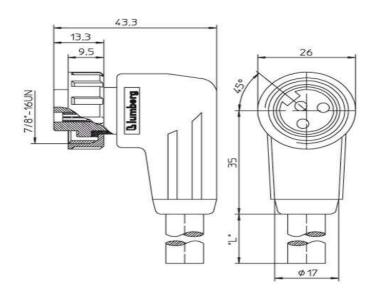

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.