



Product information ASBS 8/LED 5-4/4E-4A - ASBS 8/LED 5-4 53499


Name	ASBS 8/LED 5-4/4E-4A
	Pluggable actuator/sensor distribution box, 8 port version, with LED operation and function indicators, to connect 4 standard sensors and 4 standard actuator
Delivery informations	with separate power supply for inputs and outputs, combined FIXCOM/M12 socket, 4-pole, 1 signal per socket, M23 connection for the control cable.
	available
Availability Product description	avanane
	ACC OFFICE
Type Order No.	ASBS 8/LED 5-4 53499
Description	Pluggable actuator/sensor distribution box, 8 port version, with LED operation and function indicators, to connect 4 standard sensors and 4 standard actuator
Normhau of contacts	with separate power supply for inputs and outputs, combined FIXCOM/M12 socket, 4-pole, 1 signal per socket, M23 connection for the control cable.
Number of contacts	4 (M12)
Version	8 ports
Color of housing	black
Product characteristics	Vibration resistance, Oil resistance
Classification	
Belden brand	Lumberg-Automation
Mechanical data	luc.
Thread	M12
LED display present	✓
Environmental conditions	
Environmental temperature	-15 °C 80 °C
Degree of protection (IP), mounted	IP67
Pollution degree	3
Materials	
Housing material / Molded body	TPU, self-extinguishing
Contact bearer material	PA-GF, self-extinguishing
Contact material	CuZn
Contact material - Surface refinement	pre-nickeled and 0.8 microns gold-plated
Knurled screw / nut material	CuZn, nickel-plated
Sealing material	FKM
Electrical data	
Contact resistance	$\leq 5 \text{ m}\Omega$
Rated current In	4 A per socket / 12 A max. at 40°C
Nominal voltage	10 - 30 V DC
Rated voltage	32 V
Insulation resistance	>1 GΩ
Approvals	
Approvals	cURus
Scope of delivery and accessories	
Scope of delivery	ZVK: 2 dust covers for unused sockets
	ZBS: 10 attachable labels

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture

Drawing

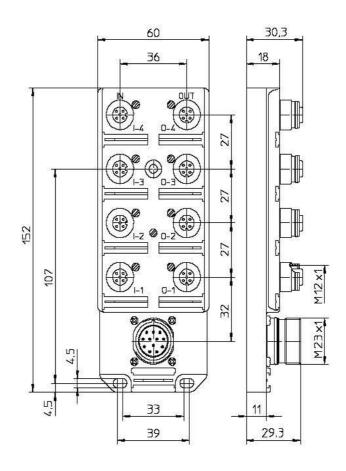

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.