

## La lumbergautomation

**Product information** 

12 ports, 5-15 M - ASBM 12/LED 3-347/15 M 65363


Name	12 ports, 5-15 M
	Miniature actuator/sensor distribution box, 12-port version, with integrated LED operation and function indicators, M8-sockets, 3-pole, fixed control cable, PUI jacket, halogen free, black, 15 meter.
Delivery informations	
Availability	available
Product description	
Туре	ASBM 12/LED 3-347/15 M
Order No.	65363
Description	Miniature actuator/sensor distribution box, 12-port version, with integrated LED operation and function indicators, M8-sockets, 3-pole, fixed control cable, PUI jacket, halogen free, black, 15 meter.
Number of contacts	3 (M8)
Version	12 ports
Color of housing	black
Product characteristics	Vibration resistance, Oil resistance, Drag chains suitable
Classification	
Belden brand	Lumberg-Automation
Mechanical data	
Thread	M8
LED display present	✓
Environmental conditions	
Environmental temperature	-25 °C 70 °C
Degree of protection (IP), mounted	1P67
Pollution degree	3
Materials	
Housing material / Molded body	PBT
Contact bearer material	PA-GF, self-extinguishing
Contact material	CuSn
Contact material - Surface refinement	pre-nickeled and 0.8 microns gold-plated
Knurled screw / nut material	CuZn, nickel-plated
Sealing material	FKM
Electrical data	· 180
Contact resistance	$\leq 5 \text{ m}\Omega$
Rated current In	1.5 A per socket / 1.5 A max. at 40°C
Nominal voltage	10 - 30 V DC
Insulation resistance	>1 GΩ
Approvals	> roc
Approvals	cURus
Cable	
Cable length	15 m
Cable number	347
Cable description	Cable for actuator/sensor distribution boxes
Color of jacket	black
Material of outer jacket	PUR
Outer diameter of the cable	7.2 mm
Number of conductors	14

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect



Cable design	14 x 0.25 mm <sup>2</sup>
Conductor design	finest stranded, 32 x Ø 0.1 mm
Flame resistant according to standard	IEC 60332-2, CSA FT-2
Scope of delivery and accessories	
Scope of delivery	ZVKM: 2 M8 dust covers for unused sockets
	ZBR 5/10: attachable labels, 5 pieces
Picture	

Drawing

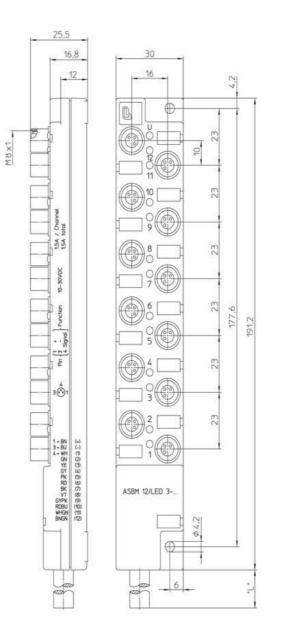

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.