

FL SWITCH EP7428R-L3F1P - Industrial Ethernet Switch



1539668

<https://www.phoenixcontact.com/gb/products/1539668>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Your advantages

- Layer 2 and Layer 3 functions
- Modules allow device connections to expand from 10/100 Mbps to 1000 Mbps, and uplink connections from 1 Gbps to 10 Gbps
- Extensive security functions for remote access, local access and network access areas
- 28-port rack-mount switch with required modular port and power supplies
- Hot-swappable port and power supply modules
- IEEE 802.3af PoE support
- IEEE 802.3at PoE+ support
- IEEE 802.3bt PoE++ support

Commercial data

Item number	1539668
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DNN511
Product key	DNN511
GTIN	4067923012349
Weight per piece (including packing)	8,162 g
Weight per piece (excluding packing)	6,003 g
Customs tariff number	85176200
Country of origin	CA

FL SWITCH EP7428R-L3F1P - Industrial Ethernet Switch



1539668

<https://www.phoenixcontact.com/gb/products/1539668>

Technical data

Dimensions

Width	486.2 mm
Height	44.4 mm
Depth	446.7 mm

Mounting

Mounting type	Rack mount, includes brackets
---------------	-------------------------------

Interfaces

Ethernet

Connection method	RJ45
Note on the connection method	Auto negotiation and autocrossing
Transmission speed	10/100/1000 Mbps
Transmission physics	Copper
Transmission length	100 m (per segment)
No. of channels	RJ45 or SFP

Ethernet (SFP)

Connection method	SFP
Transmission speed	1000/10000 Mbps (full duplex)
Transmission physics	Depending on the SFP module

Ethernet (PoE)

Connection method	RJ45
Transmission speed	10/100/1000 Mbps
Transmission physics	Ethernet RJ45

Output data

Digital:

Output name	Alarm relay output: 24 V DC, 1 A maximum
-------------	--

Product properties

Product type	Switch
Product family	Managed Switch EP7000

Insulation characteristics

Overvoltage category	II
Degree of pollution	2

Switch functions

Basic functions	PoE according to IEEE IEEE 802.3af/IEEE 802.3at/IEEE 802.3bt
Signal contact control voltage	24 V DC
Signal contact control current	1 A

FL SWITCH EP7428R-L3F1P - Industrial Ethernet Switch



1539668

<https://www.phoenixcontact.com/gb/products/1539668>

MAC address table	16k
Security functions	
Basic functions	PoE according to IEEE IEEE 802.3af/IEEE 802.3at/IEEE 802.3bt

Electrical properties

Supply	
Supply voltage	Based on modular power supplies used
Function	
Signal contact control voltage	24 V DC
Signal contact control current	1 A

Connection data

Connection technology	
Connection name	Power supply
Power supply	
Connection method	Screw connection
Conductor cross section, rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross section, flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12

Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 85 °C (Type tested to 85 °C for 16 hours)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	5 % ... 95 % (non-condensing)
Permissible humidity (storage/transport)	10 % ... 95 % (non-condensing)
Vibration (operation)	in acc. with IEC 60068-2-6: 5g, 150 Hz

Standards and regulations

Standard designation	Ambient conditions
Standards/specifications	IEC 61850-3
	IEEE 1613

Approvals

Conformity/Approvals	
Conformance	CE-compliant

EMC data

Noise immunity	IEC 61850-3, IEEE 1613, EN 61000-6-2: 2005
----------------	--

FL SWITCH EP7428R-L3F1P - Industrial Ethernet Switch



1539668

<https://www.phoenixcontact.com/gb/products/1539668>

System properties

Functionality

Basic functions

PoE according to IEEE IEEE 802.3af/IEEE 802.3at/IEEE 802.3bt

FL SWITCH EP7428R-L3F1P - Industrial Ethernet Switch




1539668


<https://www.phoenixcontact.com/gb/products/1539668>

Drawings

Connection diagram

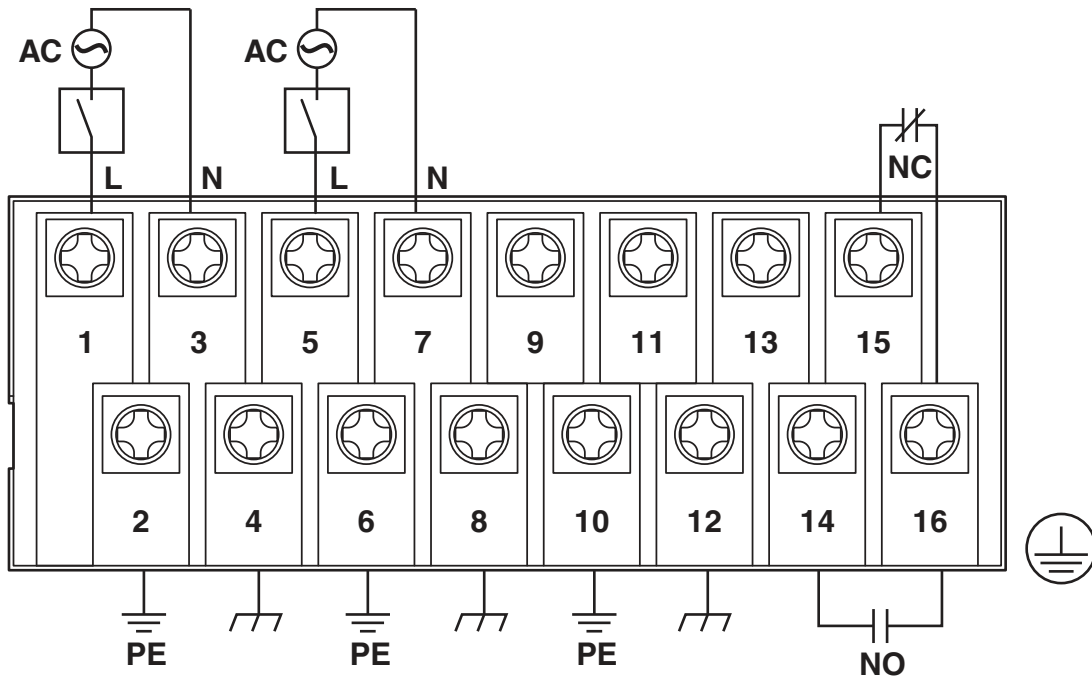

Connection diagram

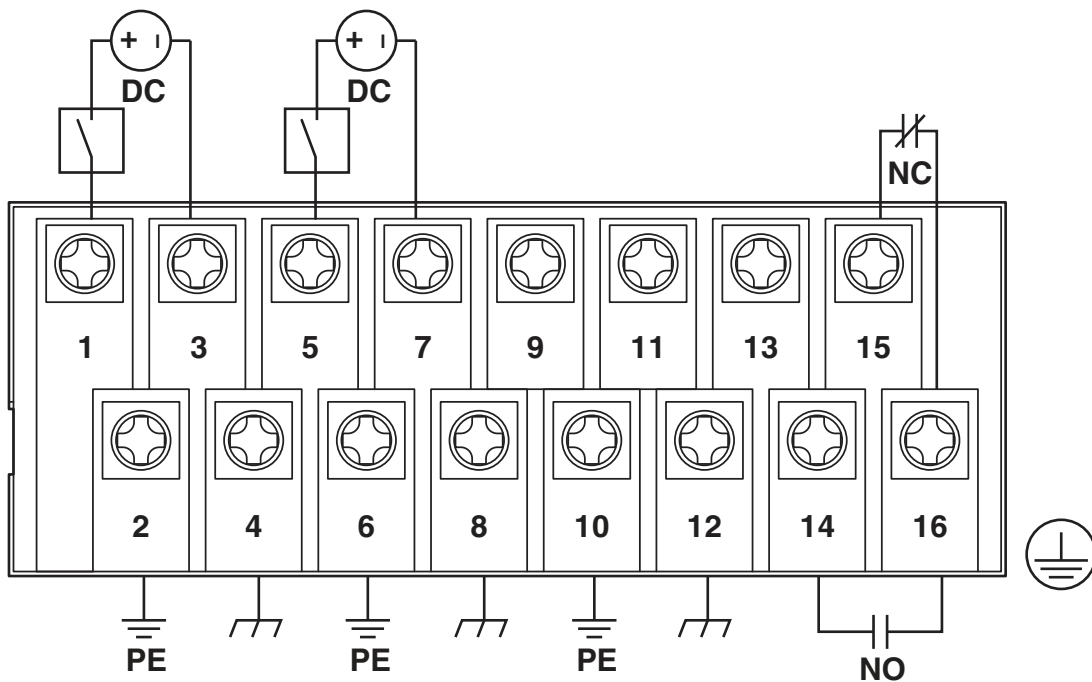

FL SWITCH EP7428R-L3F1P - Industrial Ethernet Switch



1539668

<https://www.phoenixcontact.com/gb/products/1539668>

Classifications

ECLASS

ECLASS-11.0	19170401
ECLASS-13.0	19170401

ETIM

ETIM 8.0	EC000734
----------	----------

FL SWITCH EP7428R-L3F1P - Industrial Ethernet Switch



1539668

<https://www.phoenixcontact.com/gb/products/1539668>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c), 7(a), 7(c)-I, 7(c)-II

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	1-Methyl-2-pyrrolidone (NMP)(CAS: 872-50-4)
	N,N-dimethylacetamide(CAS: 127-19-5)
	Hexahydromethylphthalic anhydride(CAS: n/a)
	Lead titanium zirconium oxide(CAS: 12626-81-2)
	Lead titanium trioxide(CAS: 12060-00-3)
	Orange lead (lead tetroxide)(CAS: 1314-41-6)
	4,4'-isopropylidenediphenol(CAS: 80-05-7)
	Terphenyl, hydrogenated(CAS: 61788-32-7)
	Lead(CAS: 7439-92-1)
	2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one(CAS: 71868-10-5)

FL SWITCH EP7428R-L3F1P - Industrial Ethernet Switch



1539668

<https://www.phoenixcontact.com/gb/products/1539668>

Accessories

FL SWITCH EP7400 -M8POE - Communication module

1539669

<https://www.phoenixcontact.com/gb/products/1539669>

Extension module, provides eight PoE RJ45 ports at 10/100/1000 Mbps



FL SWITCH EP7400-PS-LV - Power module

1144367

<https://www.phoenixcontact.com/gb/products/1144367>

Power module



FL SWITCH EP7428R-L3F1P - Industrial Ethernet Switch

1539668

<https://www.phoenixcontact.com/gb/products/1539668>

FL SWITCH EP7400-PS-MV - Power module

1144372

<https://www.phoenixcontact.com/gb/products/1144372>

Power module



FL SWITCH EP7400-PS-HV - Power module

1144175

<https://www.phoenixcontact.com/gb/products/1144175>

Power module



FL SWITCH EP7428R-L3F1P - Industrial Ethernet Switch



1539668

<https://www.phoenixcontact.com/gb/products/1539668>

FL SWITCH EP7400-M8GRJ45 - Communication module

1144375

<https://www.phoenixcontact.com/gb/products/1144375>

Extension module, provides eight RJ45 ports at 10/100/1000 Mbps



FL SWITCH EP7400-M8GSFP - Communication module

1144383

<https://www.phoenixcontact.com/gb/products/1144383>

Extension module, provides eight SFP at 100/1000 Mbps



FL SWITCH EP7428R-L3F1P - Industrial Ethernet Switch



1539668

<https://www.phoenixcontact.com/gb/products/1539668>

FL SWITCH EP7400-M4TGSFP - Communication module

1144388

<https://www.phoenixcontact.com/gb/products/1144388>

Extension module, provides four SFP ports at 1/10 Gbps



FL SWITCH EP7400-ABLK - Cover

1144428

<https://www.phoenixcontact.com/gb/products/1144428>



FL SWITCH EP7428R-L3F1P - Industrial Ethernet Switch



1539668

<https://www.phoenixcontact.com/gb/products/1539668>

FL SWITCH EP7400-PNLMNT - Mounting panel

1380736

<https://www.phoenixcontact.com/gb/products/1380736>



The FL SWITCH EP7400-PNLMNT mounts FL SWITCH EP7... directly on a panel

FL SWITCH EP7400-M4GRJ45-4GSFP - Communication module

1539361

<https://www.phoenixcontact.com/gb/products/1539361>



Extension module, provides four RJ45 ports at 10/100/1000 Mbps and four SFP ports at 100/1000 Mbps

FL SWITCH EP7428R-L3F1P - Industrial Ethernet Switch



1539668

<https://www.phoenixcontact.com/gb/products/1539668>

FL SWITCH EP7400 -M8SERRJ - Communication module

1539362

<https://www.phoenixcontact.com/gb/products/1539362>

Extension module, provides eight serial RJ45 ports, RS-232/422/485



FL SWITCH EP7400 -M4SERDB - Communication module

1539365

<https://www.phoenixcontact.com/gb/products/1539365>

Extension module, provides four serial D-SUB 9 ports, RS-232/422/485



FL SWITCH EP7428R-L3F1P - Industrial Ethernet Switch



1539668

<https://www.phoenixcontact.com/gb/products/1539668>

FL SWITCH EP7400-MHSR-PRP - Communication module

1510975

<https://www.phoenixcontact.com/gb/products/1510975>

Extension module, provides four gigabit HSR/PRP combo ports (10/100/1000 Mbps RJ45 connection and 100/1000 Mbps SFP connection)



FL SWITCH EP7400-MCP-W-256GB - Communication module

1539385

<https://www.phoenixcontact.com/gb/products/1539385>



FL SWITCH EP7428R-L3F1P - Industrial Ethernet Switch



1539668

<https://www.phoenixcontact.com/gb/products/1539668>

FL SWITCH EP7400-MCP-W-512GB - Communication module

1539414

<https://www.phoenixcontact.com/gb/products/1539414>



FL SWITCH EP7400-MCP-W-1TB - Communication module

1539416

<https://www.phoenixcontact.com/gb/products/1539416>



FL SWITCH EP7428R-L3F1P - Industrial Ethernet Switch



1539668

<https://www.phoenixcontact.com/gb/products/1539668>

FL SWITCH EP7400-MCP-W-2TB - Communication module

1539658

<https://www.phoenixcontact.com/gb/products/1539658>



FL SWITCH EP7400-MCP-L-256GB - Communication module

1539661

<https://www.phoenixcontact.com/gb/products/1539661>



FL SWITCH EP7428R-L3F1P - Industrial Ethernet Switch



1539668

<https://www.phoenixcontact.com/gb/products/1539668>

FL SWITCH EP7400-MCP-L-512GB - Communication module

1539663

<https://www.phoenixcontact.com/gb/products/1539663>



FL SWITCH EP7400-MCP-L-1TB - Communication module

1539665

<https://www.phoenixcontact.com/gb/products/1539665>



FL SWITCH EP7428R-L3F1P - Industrial Ethernet Switch



1539668

<https://www.phoenixcontact.com/gb/products/1539668>

FL SWITCH EP7400-MCP-L-2TB - Communication module

1539666

<https://www.phoenixcontact.com/gb/products/1539666>



FL SFP FX - Media module

2891081

<https://www.phoenixcontact.com/gb/products/2891081>



The small form-factor plug-in module provides a fiber optic interface with a data transmission speed of 100 Mbps with a wavelength of 1310 nm (long).

FL SWITCH EP7428R-L3F1P - Industrial Ethernet Switch



1539668

<https://www.phoenixcontact.com/gb/products/1539668>

FL SFP FX SM - Media module

2891082

<https://www.phoenixcontact.com/gb/products/2891082>



The small form-factor plug-in module provides a fiber optic interface with a data transmission speed of 100 Mbps with a wavelength of 1310 nm (long).

FL SFP GT - Media module

2989420

<https://www.phoenixcontact.com/gb/products/2989420>



Gigabit SFP module for transmission up to 100 m.

FL SWITCH EP7428R-L3F1P - Industrial Ethernet Switch



1539668

<https://www.phoenixcontact.com/gb/products/1539668>

FL SFP SX - Media module

2891754

<https://www.phoenixcontact.com/gb/products/2891754>



Gigabit SFP module for transmission up to 1 km with a wavelength of 850 nm.

FL SFP SX2 - Media module

2702397

<https://www.phoenixcontact.com/gb/products/2702397>



Gigabit SFP module for transmission up to 2 km with a wavelength of 1310 nm.

FL SWITCH EP7428R-L3F1P - Industrial Ethernet Switch



1539668

<https://www.phoenixcontact.com/gb/products/1539668>

FL SFP LX - Media module

2891767

<https://www.phoenixcontact.com/gb/products/2891767>



Gigabit SFP module for transmission up to 30 km with a wavelength of 1310 nm.

FL SFP LX10-B - Media module

1025401

<https://www.phoenixcontact.com/gb/products/1025401>



Gigabit SFP module for transmission up to 10 km with a wavelength of 1310 nm.

FL SWITCH EP7428R-L3F1P - Industrial Ethernet Switch



1539668

<https://www.phoenixcontact.com/gb/products/1539668>

FL SFP-10G-SR - Media module

1145046

<https://www.phoenixcontact.com/gb/products/1145046>



10 Gigabit SFP module for transmission up to 300 m with a wavelength of 850 nm.

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk